

People Counter Dashboard

Inhaltsverzeichnis	
1 Prepare KBOX A-330-RPI	1
1.1 Download image	1
1.2 Copy image to the Micro SD Card	2
2 Setup XOVIS cameras	2
2.1 Add XOVIS cameras	2
2.2 Change camera credentials	3
2.3 Delete API cameras.	3
2.4 Additional field designations.	4
3 Setup Dashboards	4
3.1 Add Dashboard.	4
3.2 Change Dashboard credentials	6
3.3 Delete Dashboard.	7
4 Setup Executable Devices	7
4.1 Add Executable Devices	7
4.2 Change Executable Device credentials	8
4.3 Delete Executable Device	8
4.4 Additional field designations.	9
5 Setup Output Signals of Executable Device	9
5.1 Add Output Signals	9
5.2 Change Output Signals credentials	10
5.3 Delete Output Signals	11
6 Upload files to the server	11
6.1 Add Files.	11
6.2 Show uploaded image files.	12
6.3 Delete Files.	12
7 Users	12
7.1 Add a user	12
7.2 Change user credentials	13
7.3 Delete a user	14
8 Change browser configuration	14
8.1 Reload browser configuration	14

Prepare KBOX A-330-RPI

Download image

Version	Download Link
1.3.0.1	http://nas0.dnsalias.com:5000/sharing/wZzteL0s7

Copy image to the Micro SD Card

1. Download an image from the table above
2. Extract an archive
3. Use utility **HDDRawCopy1.10Portable** from the archive to copy the image on the Micro SD Card


Setup XOVIS cameras

Add XOVIS cameras


1. To add a new XOVIS camera, you firstly need to select the **Devices/ Geräte** tab.




2. Click on the **Add/ Hinzufügen** button.




3. Here you should specify the camera URL.

The image shows a form field labeled 'Kamera Url *'. The input field contains the text 'http://192.168.1.45'.


4. Specify a login to access the camera.

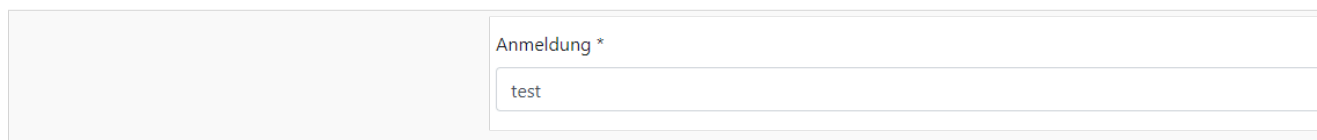The image shows a form field labeled 'Anmeldung *'. The input field contains the text 'test'.


5. Specify a password to access the camera.

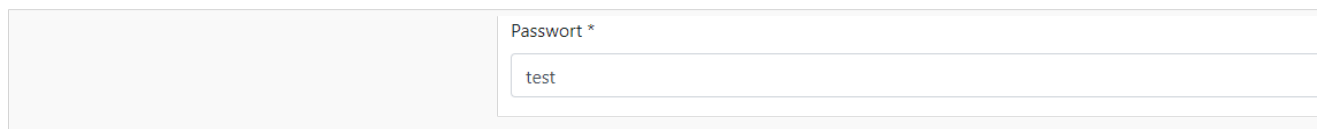The image shows a form field labeled 'Passwort *'. The input field contains the text 'test'.

6. In this field specify the URL of your server (this field will be used for PUSH notification configuration on the camera side).

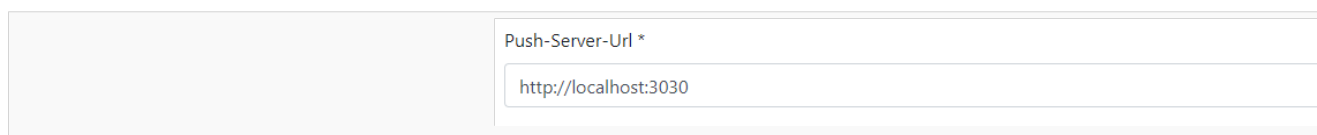
The image shows a form field labeled 'Push-Server-Url *'. The input field contains the text 'http://localhost:3030'.

7. Save it.




Change camera credentials

1. If you want to change camera data just click on the camera list area.

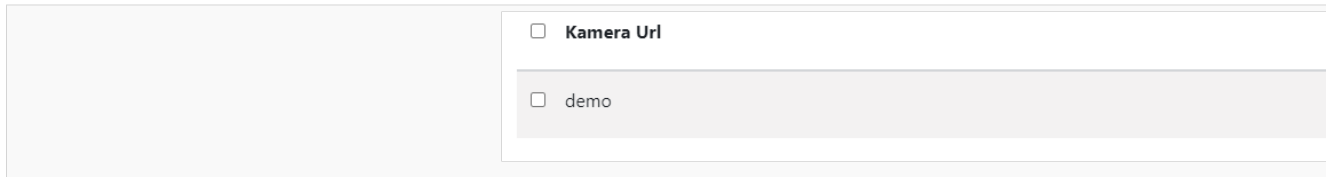


2 Then click on the **Edit/ Bearbeiten** button.



3. After that you can change camera data.

4. And save changes.




Delete API cameras.


HINWEIS

Be careful! Do not remove cameras that are used.

1. To remove unwanted cameras, mark them.




2. Click on the Delete/ Löschen button.



Additional field designations.


The status icon shows the connection to the camera. If it is green then the connection exists, if it is red then no connection exists.

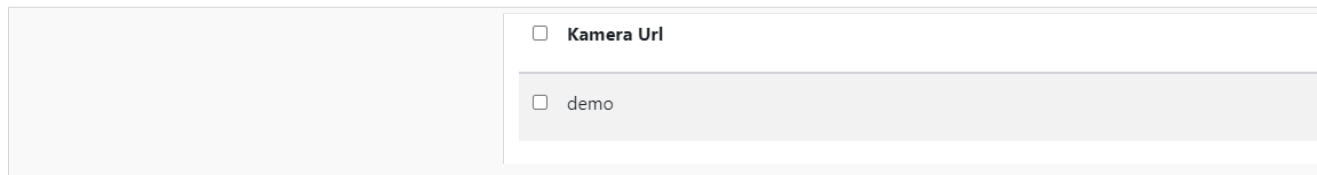

Kamera Url

demo


The status connection you can see also if you just click on the camera list area.

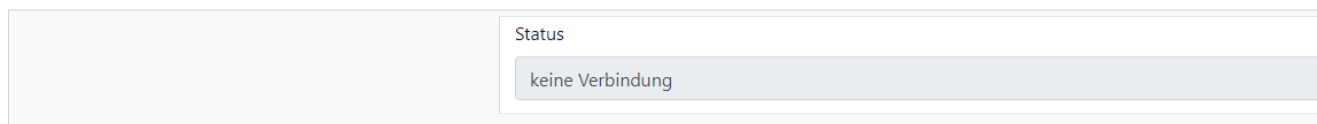

Status

keine Verbindung


This field shows the connection error.

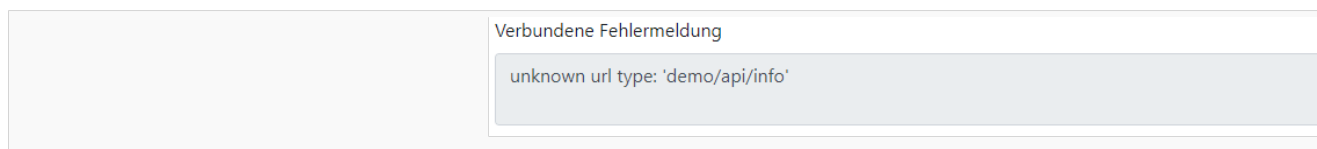

Verbundene Fehlermeldung

unknown url type: 'demo/api/info'

MAC camera address. It is automatically filled in by the server.

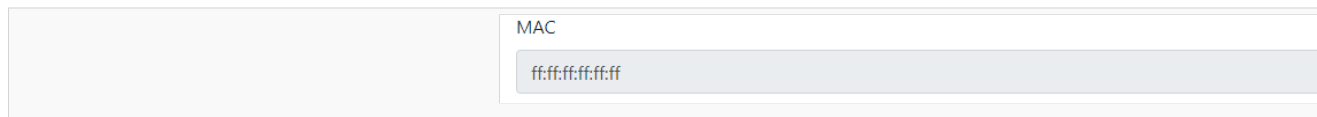

MAC

ff:ff:ff:ff:ff:ff

Setup Dashboards

Add Dashboard.


1. Add a new dashboard, you firstly need to go to Dashboard.



wanzl Zuhause Geräte **Dashboard** System

2. Select the Dashboards tab.

3. And then click on the **Add/ Hinzufügen** button.



Hinzufügen Löschen

4. Enter here the name of the area.

	Name *
	<input type="text" value="Test"/>

5. Here you should specify a unique name without spaces and starts with a lowercase letter. This is a service field. For example: If you specified the name "Test", you can specify a unique name "test".

	Eindeutiger Name *
	<input type="text" value="test"/>

6. Here you can select a theme for the area display. For example:

	Vorlage
	<input type="button" value="Wählen Sie das Vorlage"/>

7. Here you can choose the background for the "Basic" theme. If you want to add an image, you should upload it up to the server. More details on the link [upload files](#)

	Hintergrundbild
	<input type="text" value="background_wanzl.jpg"/>

8. This field can be used in case if you want to specify an Offset for counter(for example when people are already in the area, but camera's counter is zero).

	Zähler-Offset
	<input type="text" value="0"/>

9. Click on the **Add/ Hinzufügen** button to add a camera.

	<input type="button" value="Hinzufügen"/>
--	---

10. Select the camera that was added earlier. If you do not know how to add a camera to click on this link [setup XOVIS cameras](#)

11. Choose the detect type.

12. Enter the name line.

	Kamera ▾	Typ erkennen ▾	Name der
	<input type="text" value="demo"/>	<input type="text" value="Line"/>	<input type="text" value="Line 0"/>

13. Here we specify the maximum capacity of the number of people.

Kapazität *
10

14. Here you can specify the schedule restart counter time. If you need to specify more than 2 values, be sure to separate them with a semicolon.

Zeitplan für das Zurücksetzen des Zählers
06:00;18:00

If you need to change the text translation on Dashboard by interval:

15. To add the ability to select a language, click the **Add/ Hinzufügen** button as many times as you need the languages.

<input type="button" value="Hinzufügen"/>

16. Choose a language.

Sprachen ▾
English
Deutsch

17. Enter the language switching interval in seconds.

Sprach-Timeout(Sec)
10

18. And save it.

<input type="button" value="✓ Speichern"/> <input type="button" value="✗ Abbrechen"/>


Change Dashboard credentials

1. If you want to change dashboard data just click on the dashboard list area.


<input type="checkbox"/> Name
<input type="checkbox"/> Demo

People Counter Dashboard

2. Then click on the **Edit/ Bearbeiten** button.




3. After that you can change dashboard data. 4. And save changes.




Delete Dashboard.

1. To remove unwanted Dashboard, mark them.




2. And then click on the **Delete/ Löschen** button.



Setup Executable Devices


Add Executable Devices

1. To add a new executable device, you firstly need to select the **Devices/ Geräte** tab.



2. Select the **Executable Devices/ Ausführbare Geräte** tab.

3. And then click on the **Add/ Hinzufügen** button.



4. Select the type of executable device communication protocol.



5. Here you should specify the executable device URL.

	URL-Adresse *
	udp://192.168.1.10:12345

6. And Save it.

	<input type="button" value="✓ Speichern"/> <input type="button" value="✗ Abbrechen"/>
--	---

Change Executable Device credentials

1. If you want to change executable device data just click on the executable device list area.

	<input type="checkbox"/> Name
	<input type="checkbox"/> udp://192.168.1.10:12345

2. Then click on the **Edit/ Bearbeiten** button.

	<input type="button" value="✎ Bearbeiten"/> <input type="button" value="🗑 Löschen"/>
--	--


3. After that you can change executable device data.

4. And save changes.

	<input type="button" value="✓ Speichern"/> <input type="button" value="✗ Abbrechen"/>
--	---

Delete Executable Device

1. To remove an executable device, mark them.



2. Be careful! Do not remove an executable device that is used. Click on the **Delete/ Löschen** button.

	<input type="button" value="➕ Hinzufügen"/> <input type="button" value="🗑 Löschen"/>
--	--

Additional field designations.

Command Information/ Kommando-Informationen contains information about commands to control the device.

Kommando-Informationen

- FF0100 - Relay 1 OFF command (ASCII encoding)
- FF0101 - Relay 1 ON command (ASCII encoding)
- FF0200 - Relay 2 OFF command (ASCII encoding)
- FF0201 - Relay 2 ON command (ASCII encoding)
- FF0300 - Relay 3 OFF command (ASCII encoding)
- FF0301 - Relay 3 ON command (ASCII encoding)
- FF0400 - Relay 4 OFF command (ASCII encoding)
- FF0401 - Relay 4 ON command (ASCII encoding)
- FFE000 - All relays OFF command (ASCII encoding)
- FFE003 - All relays ON command (ASCII encoding)

Setup Output Signals of Executable Device

Add Output Signals


1. To add new output signals, you firstly need to select the **Devices/ Geräte** tab.



The screenshot shows a navigation bar with the 'wanzi' logo on the left and four tabs: 'Zuhause', 'Geräte', 'Dashboard', and 'System'. The 'Geräte' tab is highlighted with a red box.


2. Select the **Output Signals/ Ausgangssignale** tab.

3. And then to click on the **Add/ Hinzufügen** button.




The screenshot shows two buttons: a blue button with a plus sign and the text 'Hinzufügen', and a red button with a trash icon and the text 'Löschen'. The 'Hinzufügen' button is highlighted with a red box.

4. Enter here the name of the output signals.

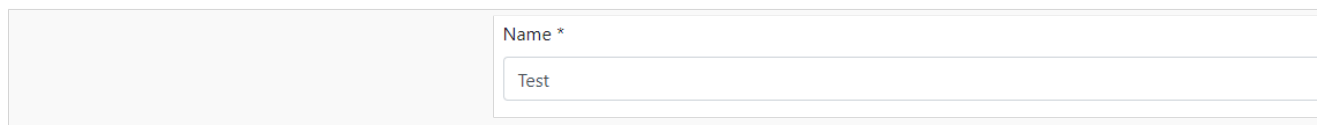

The screenshot shows a form with a label 'Name *' and an input field containing the text 'Test'.

5. Here you should select an area.

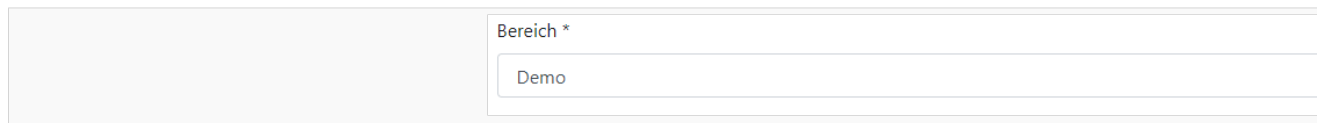

The screenshot shows a form with a label 'Bereich *' and an input field containing the text 'Demo'.

6. Here you should choose the executable device URL.

	Ausführbare Gerät *
	udp://192.168.1.10:12345

7. Insert the command of a high level of the executable device.

	Hochrangiger Befehl ⓘ
	FF0101

8. Insert the command of a low level of the executable device.

	Befehl auf niedriger Ebene ⓘ
	FF0100

9. Here you can specify transition delay time.

	Impulszeit, ms
	0

10. This field is necessary to specify the condition of relay triggering.

	Bedingung *
	capacity <= count

11. Save it.

	<input type="button" value="✓ Speichern"/> <input type="button" value="✗ Abbrechen"/>
--	---

Change Output Signals credentials

1. If you want to change output signals data just click on the output signals list area.


	<input type="checkbox"/> Name
	<input type="checkbox"/> Test

2. Then click on the **Edit/ Bearbeiten** button.

	<input type="button" value="✎ Bearbeiten"/> <input type="button" value="🗑 Löschen"/>
--	--


3. After that you can change its data.

4. And save changes.




Delete Output Signals

1. To remove unwanted Output Signals, mark them.



2. Click on the **Delete/ Löschen** button.



Upload files to the server


Add Files.

1. Add a new area, you firstly need to go to Dashboard.




2. Select the Image Assets/ Bild-Assets tab.

3. And then click on the Add/ Hinzufügen button and select a file on your file system. If a file is uploaded to the server, you can see it in the file list.



Show uploaded image files.

1. If you want to see image files just click on the file list area.

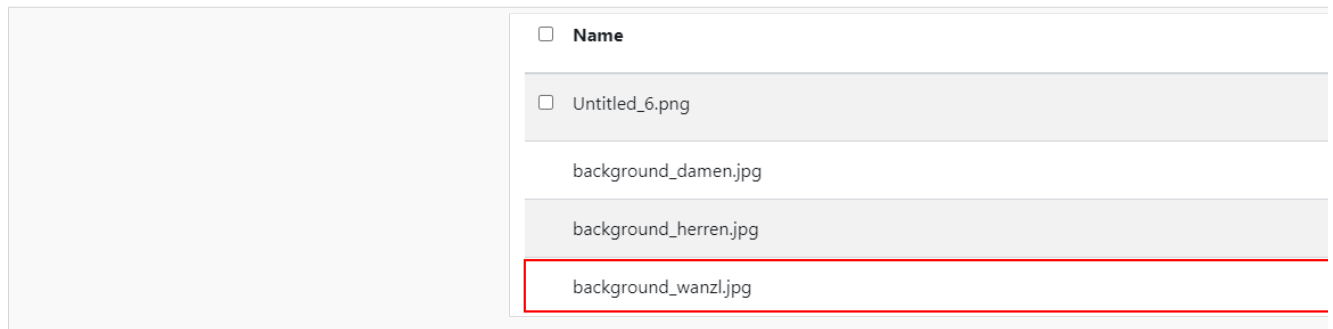


Delete Files.


HINWEIS

Be careful! Do not remove files that are used.

1. To remove unwanted files on the server, mark them. Preset files can't be deleted.



2. And then click on the Delete/ Löschen button.




Users

Add a user

1. To add a new user, you firstly need to select the **Settings/Einstellungen** tab

2. Click on the **User/Benutzer** tab


3. Then click on the **Add/Hinzufügen** button

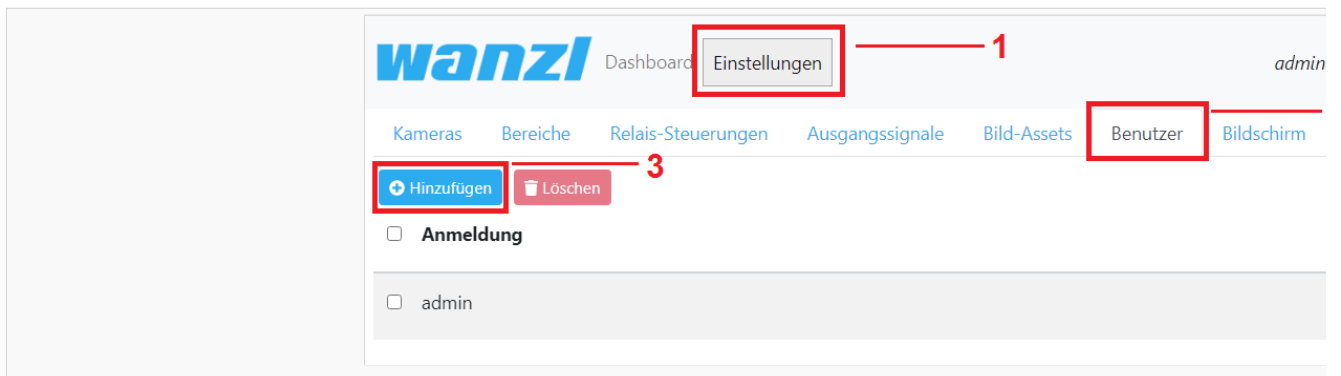

4. In this field you should specify **Login/Anmeldung** for a new user


5. In this field you should specify **Password/Passwort** for a new user

6. Click on the **Save/Speichern** button to complete the adding of new user

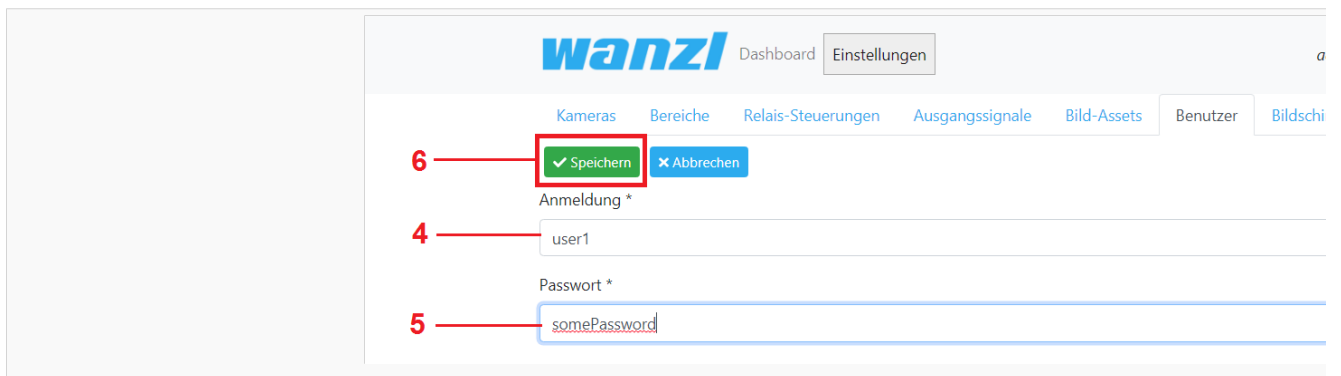


Change user credentials


1. If you want to change user data just click on the user list area

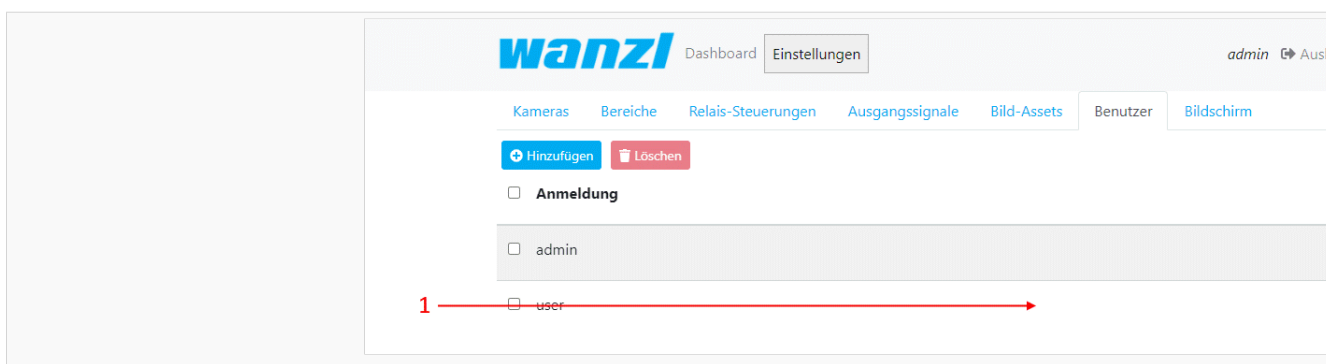


2. Then click on the **Edit/Hinzufügen** button



3. After that you can change user data

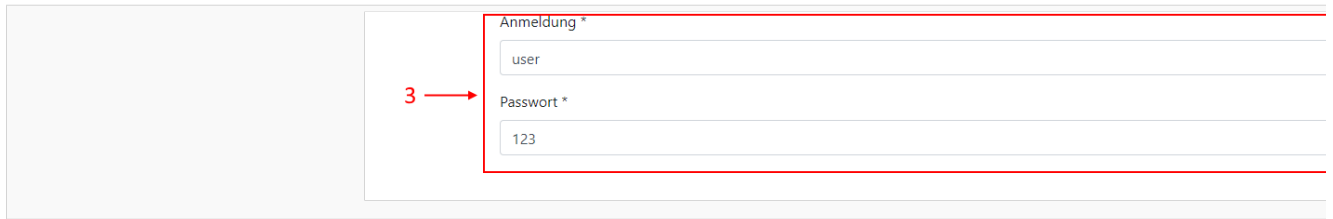

4. And save the changes




Delete a user

HINWEIS

Be careful! Do not remove users that are used.

1. To remove user, select them. Preset files can't be deleted

2. And then click on the **Delete/Löschen** button

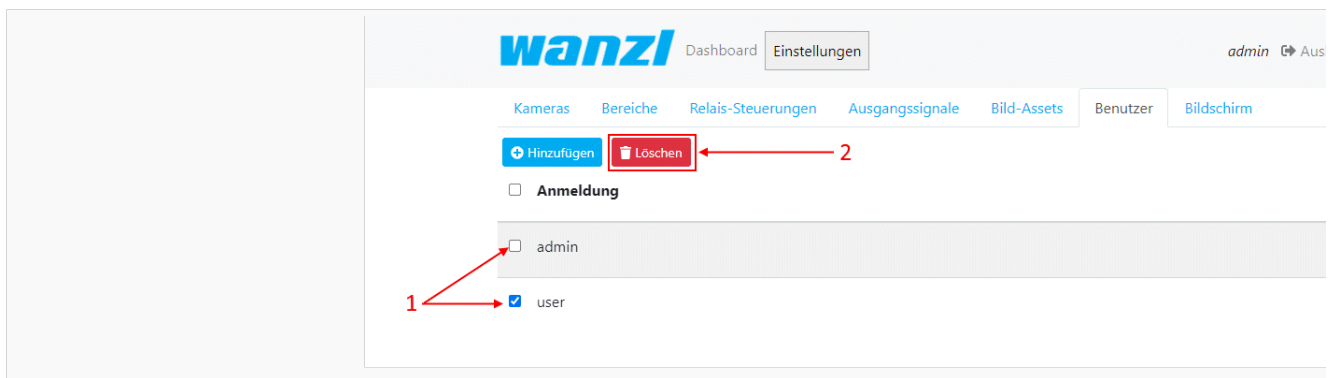

Change browser configuration

Reload browser configuration

1. To display, you firstly need to go to **Settings/Einstellungen**

2. Select the **Display/Bildschirm** tab

3. Enter the display URL

4. Then click on the **Reload** button

