

People Counter Dashboard

Ausgabe: 11.05.2026

Seite von

People Counter Dashboard



Inhaltsverzeichnis

- [1 Prepare KBOX A-330-RPI](#)
 - [1.1 Download image](#)
 - [1.2 Copy image to the Micro SD Card](#)
- [2 Setup XOVIS cameras](#)
 - [2.1 Add XOVIS cameras](#)
 - [2.2 Change camera credentials](#)
 - [2.3 Delete API cameras.](#)
 - [2.4 Additional field designations.](#)
- [3 Setup Dashboards](#)
 - [3.1 Add Dashboard.](#)
 - [3.2 Change Dashboard credentials](#)
 - [3.3 Delete Dashboard.](#)
- [4 Setup Executable Devices](#)
 - [4.1 Add Executable Devices](#)
 - [4.2 Change Executable Device credentials](#)
 - [4.3 Delete Executable Device](#)
 - [4.4 Additional field designations.](#)
- [5 Setup Output Signals of Executable Device](#)
 - [5.1 Add Output Signals](#)
 - [5.2 Change Output Signals credentials](#)
 - [5.3 Delete Output Signals](#)
- [6 Upload files to the server](#)
 - [6.1 Add Files.](#)
 - [6.2 Show uploaded image files.](#)
 - [6.3 Delete Files.](#)
- [7 Users](#)
 - [7.1 Add a user](#)
 - [7.2 Change user credentials](#)
 - [7.3 Remove a user](#)
- [8 Change browser configuration](#)
 - [8.1 Reload browser configuration.](#)
- [9 Network](#)
 - [9.1 Network Setup.](#)

Prepare KBOX A-330-RPI

Download image

Version Download Link

1.3.0.1 <http://nas0.dnsalias.com:5000/sharing/wZzteL0s7>


Copy image to the Micro SD Card

1. Download an image from the table above
2. Extract an archive
3. Use utility **HDDRawCopy1.10Portable** from the archive to copy the image on the Micro SD Card

Setup XOVIS cameras

Add XOVIS cameras

1. To add a new XOVIS camera, you firstly need to select the **Devices/ Geräte** tab.



2. Click on the **Add/ Hinzufügen** button.



3. Here you should specify the camera URL.

Kamera Url *

4. Specify a login to access the camera.

Anmeldung *

5. Specify a password to access the camera.

Passwort *

6. In this field specify the URL of your server (this field will be used for PUSH notification configuration on the camera side).

Push-Server-Url *

7. Save it.

Speichern Abbrechen

Change camera credentials

1. If you want to change camera data just click on the camera list area.

Kamera Url

demo

2 Then click on the **Edit/ Bearbeiten** button.

3. After that you can change camera data.

4. And save changes.

Speichern Abbrechen

Delete API cameras.



HINWEIS

Be careful! Do not remove cameras that are used.

1. To remove unwanted cameras, mark them.



2. Click on the Delete/ Löschen button.

Additional field designations.

The status icon shows the connection to the camera. If it is green then the connection exists, if it is red then no connection exists.

Kamera Url

demo

The status connection you can see also if you just click on the camera list area.

Status

keine Verbindung

This field shows the connection error.

Verbundene Fehlermeldung

unknown url type: 'demo/api/info'

MAC camera address. It is automatically filled in by the server.


MAC

ff:ff:ff:ff:ff:ff

Setup Dashboards


Add Dashboard.

1. Add a new dashboard, you firstly need to go to Dashboard.



2. Select the Dashboards tab.

3. And then click on the **Add/ Hinzufügen** button.



4. Enter here the name of the area.

Name *

Test

5. Here you should specify a unique name without spaces and starts with a lowercase letter. This is a service field. For example: If you specified the name "Test", you can specify a unique name "test".

Eindeutiger Name *

test

6. Here you can select a theme for the area display. For example:

Vorlage

Wählen Sie das Vorlage

7. Here you can choose the background for the "Basic" theme. If you want to add an image, you should upload it up to the server. More details on the link [upload files](#)

Hintergrundbild

background_wanzl.jpg

8. This field can be used in case if you want to specify an Offset for counter(for example when people are already in the area, but camera's counter is zero).

Zähler-Offset

0

9. Click on the **Add/ Hinzufügen** button to add a camera.

Hinzufügen

10. Select the camera that was added earlier. If you do not know how to add a camera to click on this link [setup XOVIS cameras](#)

11. Choose the detect type.

12. Enter the name line.

Kamera ▾

Typ erkennen ▾

Name der Linie ▾

demo ▾

Line ▾

Line 0

13. Here we specify the maximum capacity of the number of people.

Kapazität *

10

14. Here you can specify the schedule restart counter time. If you need to specify more than 2 values, be sure to separate them with a semicolon.

Zeitplan für das Zurücksetzen des Zählers

06:00;18:00

If you need to change the text translation on Dashboard by interval:

15. To add the ability to select a language, click the **Add/ Hinzufügen** button as many times as you need the languages.

Hinzufügen

16. Choose a language.

Sprachen ▾

English

Deutsch

17. Enter the language switching interval in seconds.

Sprach-Timeout(Sec)

10

18. And save it.

Speichern Abbrechen

Change Dashboard credentials

1. If you want to change dashboard data just click on the dashboard list area.

Name

Demo

2. Then click on the **Edit/ Bearbeiten** button.

3. After that you can change dashboard data. 4. And save changes.

Speichern Abbrechen

Delete Dashboard.

1. To remove unwanted Dashboard, mark them.




2. And then click on the **Delete/ Löschen** button.

Setup Executable Devices

Add Executable Devices

1. To add a new executable device, you firstly need to select the **Devices/ Geräte** tab.



2. Select the **Executable Devices/ Ausführbare Geräte** tab.

3. And then click on the **Add/ Hinzufügen** button.

4. Select the type of executable device communication protocol.

Typ *

KMtronic UDP

5. Here you should specify the executable device URL.

URL-Adresse *

udp://192.168.1.10:12345

6. And Save it.

✓ Speichern ✕ Abbrechen

Change Executable Device credentials

1. If you want to change executable device data just click on the executable device list area.

Name

udp://192.168.1.10:12345

2. Then click on the **Edit/ Bearbeiten** button.

✎ Bearbeiten 🗑 Löschen


3. After that you can change executable device data.

4. And save changes.

✓ Speichern ✕ Abbrechen

Delete Executable Device

1. To remove an executable device, mark them.



2. Be careful! Do not remove an executable device that is used. Click on the **Delete/ Löschen** button.

➕ Hinzufügen 🗑 Löschen

Additional field designations.

Command Information/ Kommando-Informationen contains information about commands to control the device.


Kommando-Informationen

FF0100 - Relay 1 OFF command (ASCII encoding)
FF0101 - Relay 1 ON command (ASCII encoding)
FF0200 - Relay 2 OFF command (ASCII encoding)
FF0201 - Relay 2 ON command (ASCII encoding)
FF0300 - Relay 3 OFF command (ASCII encoding)
FF0301 - Relay 3 ON command (ASCII encoding)
FF0400 - Relay 4 OFF command (ASCII encoding)
FF0401 - Relay 4 ON command (ASCII encoding)
FFE000 - All relays OFF command (ASCII encoding)
FFE003 - All relays ON command (ASCII encoding)

Setup Output Signals of Executable Device

Add Output Signals

1. To add new output signals, you firstly need to select the **Devices/ Geräte** tab.



2. Select the **Output Signals/ Ausgangssignale** tab.

3. And then to click on the **Add/ Hinzufügen** button.



4. Enter here the name of the output signals.

Name *

Test

5. Here you should select an area.

Bereich *

Demo

6. Here you should choose the executable device URL.

Ausführbare Gerät *

udp://192.168.1.10:12345

7. Insert the command of a high level of the executable device.

Hochrangiger Befehl ⓘ

FF0101

8. Insert the command of a low level of the executable device.

Befehl auf niedriger Ebene ⓘ

FF0100

9. Here you can specify transition delay time.

Impulszeit, ms

0

10. This field is necessary to specify the condition of relay triggering.

Bedingung *

capacity <= count

Information about Variables

Informationen zu Variablen

Variablen	Informationen
capacity	Kapazitäts-Dashboard
availableSeats	Anzahl der verfügbaren Plätze
backgroundImage	Hintergrundbild-URL
peopleNumber	Anzahl der Personen in der Prämisse
offsetCount	Korrektur der Anzahl der Personen in der Prämisse
inCount	Anzahl der eingegebenen Personen
outCount	Anzahl der Ausstiegspersonen

Schließen

11. Save it.

✓ Speichern

✗ Abbrechen

Change Output Signals credentials

1. If you want to change output signals data just click on the output signals list area.

Name

Test

2. Then click on the **Edit/ Bearbeiten** button.

Bearbeiten

Löschen


3. After that you can change its data.

4. And save changes.



Delete Output Signals

1. To remove unwanted Output Signals, mark them.




2. Click on the **Delete/ Löschen** button.



Upload files to the server


Add Files.

1. Add a new area, you firstly need to go to Dashboard.



2. Select the **Image Assets/ Bild-Assets** tab.

3. And then click on the **Add/ Hinzufügen** button and select a file on your file system. If a file is uploaded to the server, you can see it in the file list.



Show uploaded image files.

1. If you want to see image files just click on the file list area.




Delete Files.



HINWEIS

Be careful! Do not remove files that are used.

1. To remove unwanted files on the server, mark them. Preset files can't be deleted.




2. And then click on the **Delete/ Löschen** button.



Users

Add a user

1. To add a new user, you firstly need to select the System tab.



2. Click on the **Users/ Benutzer** tab.

3. Then click on the **Add/ Hinzufügen** button.



4. In this field you should specify **Login/ Anmeldung** for a new user

Anmeldung *

user1

5. In this field you should specify **Password/ Passwort** for a new user

Passwort

testpassword

6. If you want to grant the user administrator rights, tip this field. (Administrative rights give rights to edit, create, delete and view. And the standard rights only to view.)

Admin *

7. Click on the **Save/ Speichern** button to complete the adding of a new user.



Change user credentials

1. If you want to change user data just click on the user list area.

Anmeldung

admin

2. Then click on the **Edit/ Bearbeiten** button.


3. After that you can change user data. 4. And save the changes.

Remove a user

HINWEIS

Be careful! Do not remove users that are used.

1. To remove unwanted user, mark them. Preset files can't be deleted.



2. And then click on the **Delete/ Löschen** button.

Change browser configuration

Reload browser configuration.

1. To display, you firstly need to go to **System**.

wanzl Zuhause Geräte Dashboard **System** *adm*

2. Select the **Display/ Bildschirm** tab.

3. If you need a mouse cursor to be displayed in the kiosk, tip this field.


Show Cursor

4. Enter the display URL.


Dashboard URL *

Dashboard URL eingeben

5. Click on the **Save** button.

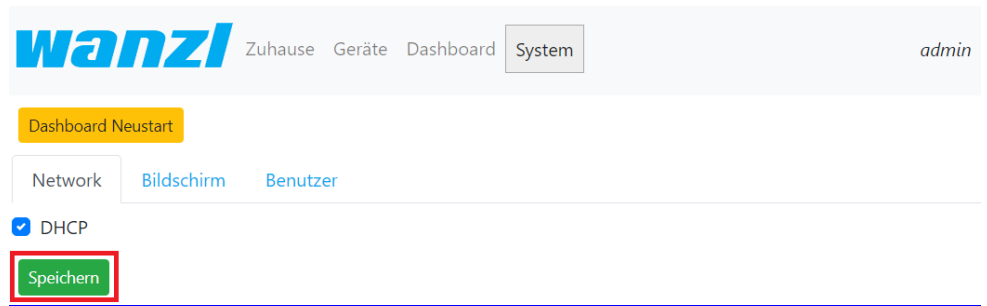


6. Then click on the **Reboot** button.

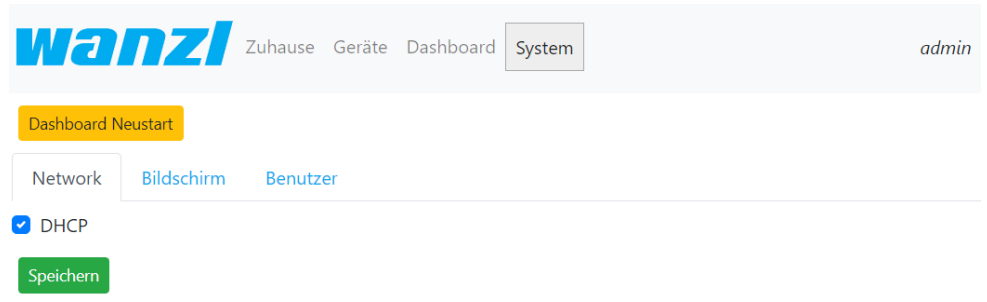

Network

Network Setup.

1. To configure or view the network settings, you firstly need to go to **System**.



2. Select the **Network** tab.


There are two methods of network configuration.

The first method:

- Tip the field.

DHCP

- Click on the **Save** button.

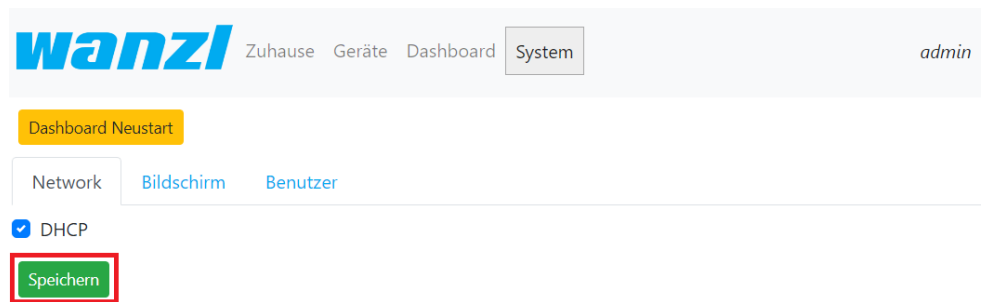

- Then click **Reboot** button. And the DHCP server will automatically give the necessary settings.

wanzi Zuhause Geräte Dashboard System admin

Dashboard Neustart

Network **Bildschirm** Benutzer

DHCP

Speichern

The second method:

- Specify an IP address.

Address *

192.168.1.66

- Enter netmask.

Netmask *

255.255.255.0

- Input address of the gateway.

Gateway *

192.168.1.1

- Now fill in the DNS IP address.

DNS Server *

8.8.8.8

- And then click on the *Reload* button.

Reload
