

Gate ~ FMCU ~ management dashboard/en



Inhaltsverzeichnis

1 General	2
2 Sign Up	2
3 Headline	2
4 Menu items	3
4.1 Facilities	3
4.1.1 Gate-View	6
4.1.2 Set up a new Gate	7
4.1.3 Edit existing Gate	12
4.1.4 Remove Gate	15
5 Administration	18
5.1 User	18
5.1.1 Set up new User	19
5.1.2 Edit existing User	19
5.1.2.1 Event Notifications	20
5.1.2.2 Locations & Positions Tab	20
5.1.2.3 Groups Tab	20
5.1.2.4 Permissions Tab	21
5.2 Groups	21
5.2.1 Set up new Group	22
5.2.2 Edit existing Group	23
5.2.2.1 Users Tab	23
5.2.2.2 Permissions Tab	24
5.3 Positions	24
5.3.1 Set up new Position	25
5.3.2 Edit existing Position	25
5.4 Locations	26
5.4.1 Set up new Location	26
5.4.2 Edit existing Location	27
5.5 Locations & Positions	28
5.6 Configuration	28
6 Events	29
6.1 Events	29
6.2 Event Definitions	29
6.3 Event definition Groups	29
6.3.1 Create a new Event definition Group	30
6.4 Event Subscriptions	31
6.5 Notifications	31
7 Cards	32
7.1 Cards	32


7.2 Edit Cards	32
8 Statistics	33

General

The Wanzl Access Manager offers a central dashbaord for access controls in a homogeneous interface, displays the corresponding states and supports the user in the administration of these components. The Wanzl Access Manager is a leading platform for monitoring and managing access controls of security areas.

Sign Up

Please enter the login information provided by support here to log in to the central dashboard.

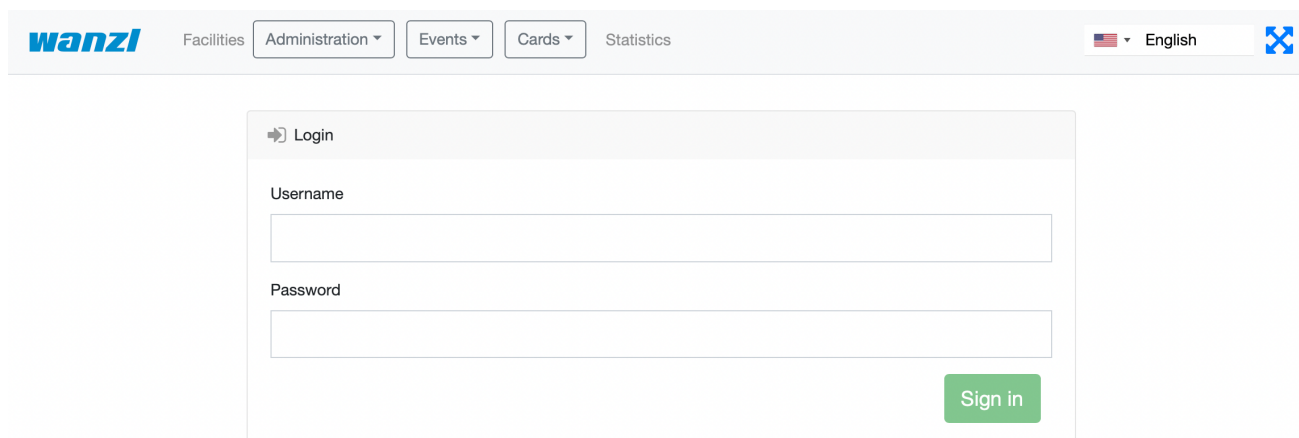

The image shows the Wanzl Access Manager login interface. At the top, there is a navigation bar with the Wanzl logo, a 'Facilities' button, and a dropdown menu for 'Administration'. To the right of the dropdown are buttons for 'Events', 'Cards', and 'Statistics'. Further right, there is a language selector showing 'English' with a flag icon and a blue 'X' icon. Below the navigation bar is a 'Login' section with a title 'Login' and a right-pointing arrow. It contains two input fields: 'Username' and 'Password'. A green 'Sign in' button is located at the bottom right of the login section.

Headline

Number	Function
1	Button Management Dashboard
2	Administration
3	Events Button
4	Cards Button
5	Statistics Button


6	Logged in User
7	Log out Button
8	Languages menu
9	Adjust the display to entire width of the screen

Menu items

Facilities

`https://<dns-name or ip-address>/gates`

In this view, all access controls are displayed in an intuitive interface. There are grouping options in two categories. First, you can group by **Location**. Within the location you can then summarize different **Locations**. Individual gates can be added via the menu item "New".

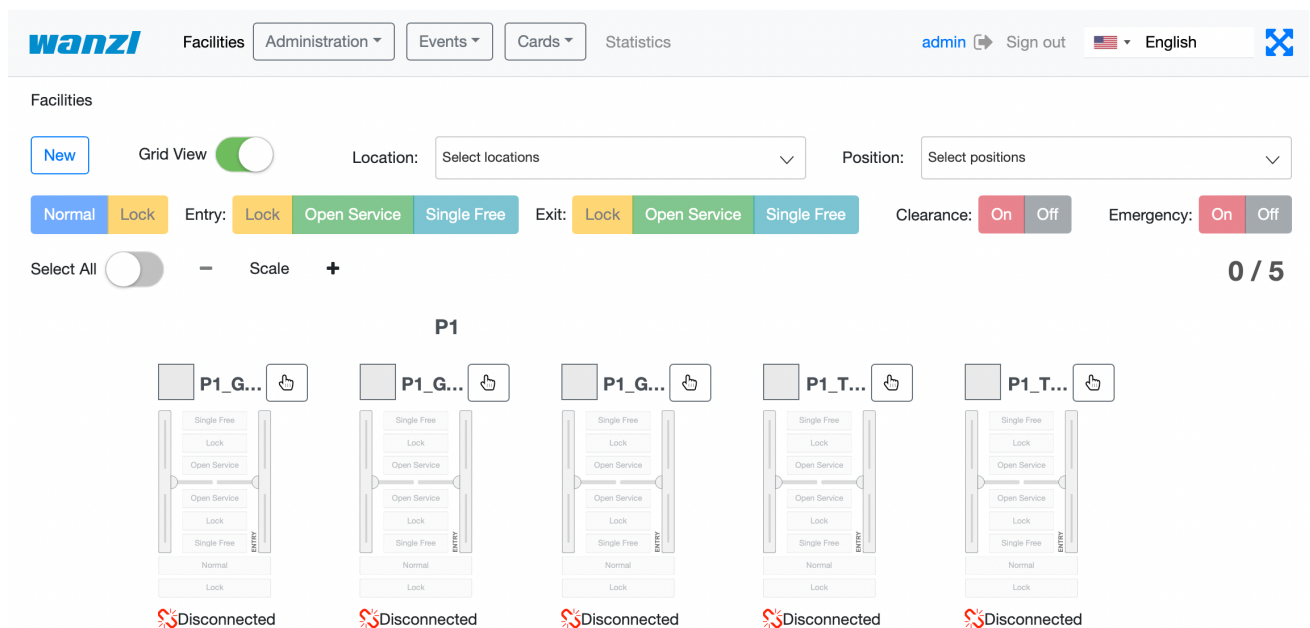

When the light view is off, the access controls are shown in the list.

Facilities
Administration
Events
Cards
Statistics
admin
Sign out
English

Facilities

New
Grid View
Location:
Position:

Normal
Lock
Entry:
Lock
Open Service
Single Free
Exit:
Lock
Open Service
Single Free
Clearance:
On
Off
Emergency:
On
Off

Name	Position	Location	Mode	Alarm	Clear.	Lock.	Facility
P1_GG1	P1	Standort	Normal				
Gate is disconnected							
P1_GG2	P1	Standort	Normal				
Gate is disconnected							
P1_GG3	P1	Standort	Normal				
Gate is disconnected							
P1_TestGate	P1	Standort	Normal				
Gate is disconnected							
P1_TestGate2	P1	Standort	Normal				
Gate is disconnected							

When one or more facilities are selected with the control,



the facilities can be controlled with the following buttons:

Symbol	Description	Note
Normal Lock	change to normal state, lock the doors in both directions	
Open Service Single Free	open the door permanently or open it for a single person	towards the entrance
Open Service Single Free	open the door permanently or open it for a single person	toward the exit
On Off	Turn the Cleaning mode on and off	cleaning
On Off	Toggle Emergency Open mode on and off	Emergency

The Gate display contains the following controls:


Symbol	Description	Note
	choose the gate	to activate the buttons above (Normal , Lock Out , etc.)
P1_GG1	Navigate to the Facilities page	
	Navigate to the page Gate-View	
Normal	change to Normal state	
Lock	lock the doors in both directions	
Single Free	open the door in the direction of entrance/exit for a single person	
Single Free	lock the door in the direction of entrance/exit	
Open Service	permanently open the door in the direction of entrance/exit	

The symbols under the gate convey various information about it:

Symbol	Description	Note
	No connection to the gate	
	The gate is in the Normal state	
	The gate is in the Locked state	
	The gate is in the fire alarm state	
	The gate is in the emergency open state	
	The cleaning mode is active	
	Alarm is active at the gate	
	The gate is permanently open	
	One or more devices at the gate have failed	
	Current selected configuration of the gate	Only if there are two or more configurations at the gate

Gate-View

In this view, you can observe the state of each gate, control the gate, and apply the gate's configurations (if there are two or more).

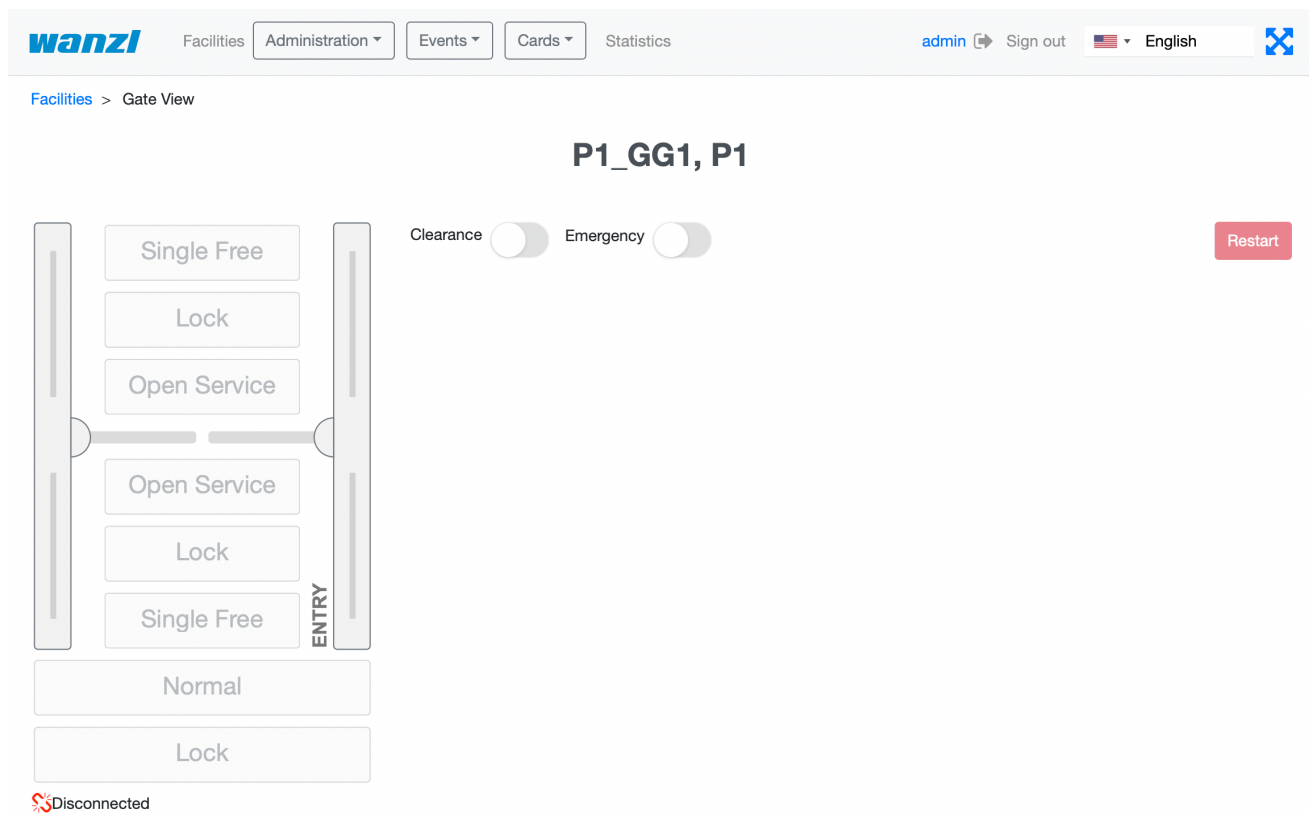

P1_GG1, P1

Clearance ☐ Emergency ☐ [Restart](#)

Single Free
Lock
Open Service
Open Service
Lock
Single Free
Normal
Lock

ENTRY

Disconnected

Konfiguration: kein freier Austritt

These buttons allow you to perform various actions:

Symbol	Description	Note
Clearance ☐	Turn cleaning mode on and off	
Emergency ☐	Manually switch the emergency open state on and off	
Restart	Restart the gate	
Konfiguration: kein freier Austritt	Choose a new configuration of the gate from the combo box	Only if there are two or more configurations at the gate

Anwenden	Apply the new configuration	
Abbrechen	Do without the new configuration	

Set up a new Gate

Please click the button **New**

Facilities
Administration
Events
Cards
Statistics
admin Sign out English

Facilities

New

Grid View

Location:
Select locations

Position:
Select positions

Normal
Lock
Entry:
Lock
Open Service
Single Free
Exit:
Lock
Open Service
Single Free
Clearance:
On
Off
Emergency:
On
Off

Select All
Scale

0 / 6

P1

P1_G...

P1_G...

P1_G...

P1_T...

P1_T...

TestG...

Single Free

Lock

Open Service

Open Service

Lock

Single Free

Normal

Lock

Disconnected

Disconnected

Disconnected

Disconnected

Disconnected

Disconnected

In this view you create a **New** gate. The fields **Names**, **Displayed Name** and **Position** of the Gate must be verified with values. Press Save then click on Facilities.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities > New Gate

Id

Name

TestGate_P1

Display name

TestGate_P1

Position

P1

Disable notifications

☐

Locked

☐

Save

Cancel

New

Delete

<

>

Cards

Edit

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities > Facility

Id

12

Name

TestGate_P1

Display name

TestGate_P1

Position

P1

Disable notifications

☐

Locked

☐

Save

Cancel

New

Delete

<

>

Cards

Barcode	Employee	Count
---------	----------	-------

Edit

You can now see in the view that you have created a **NEW** gate,
in this case the sixth gate in this view.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities

New Grid View Location: Select locations Position: Select positions

Normal Lock Entry: Lock Open Service Single Free Exit: Lock Open Service Single Free Clearance: On Off Emergency: On Off

Select All Scale + 0 / 6

P1

P1_G... P1_G... P1_G... P1_T... P1_T... TestG...

Single Free Lock Open Service Open Service Lock Lock Single Free Normal Lock

Disconnected

In the next step you connect the gate to the server.

<https://<IP-Adresse des Dashboards>>

To do this, check on the **General** tab that the correct gate name has been entered.

wanzl Home Dashboard Status Configuration System WEAC Files Statistics guest Sign out English

Save to File Load from File Reset

General Devices Alarms Signals Output Signals Dispatchers Displays Server Diamex Update Configuration Type

Save Cancel 1 / 1

general (general)

Gate name *

TestGate_P1

Slave

Suppress All Alarms

Behavior for the cases when the same valid ticket is more than one time read *

Gate is opened for one person, following ticket reads are ignored

Barcode prefix to validate against local barcodes only

Barcode regex to validate against local barcodes only

Then check the following points on the **Server** tab.

wanzi Home Dashboard Status Configuration System WEAC Files Statistics guest  Sign out  English

Save to File Load from File Reset

General Devices Alarms Signals Output Signals Dispatchers Displays **Server** Diamex Update Configuration Type

Save Cancel 1 / 1

ServerRemote

Remote

Enabled ☒

Interlock ☐

Gate's own URL (e.g. http://localhost:8888)

Pause after connection failure, seconds *

Name *

Server#0 (server)- must be set to remote.

Activated slide-switch is activated.

Your server should be entered under Name*.


Your URL should be entered under URL*.

Gate should be entered under Username*.

Your password should be entered under Password*.

Save at the end.

In the next step, please click on System in the top bar.

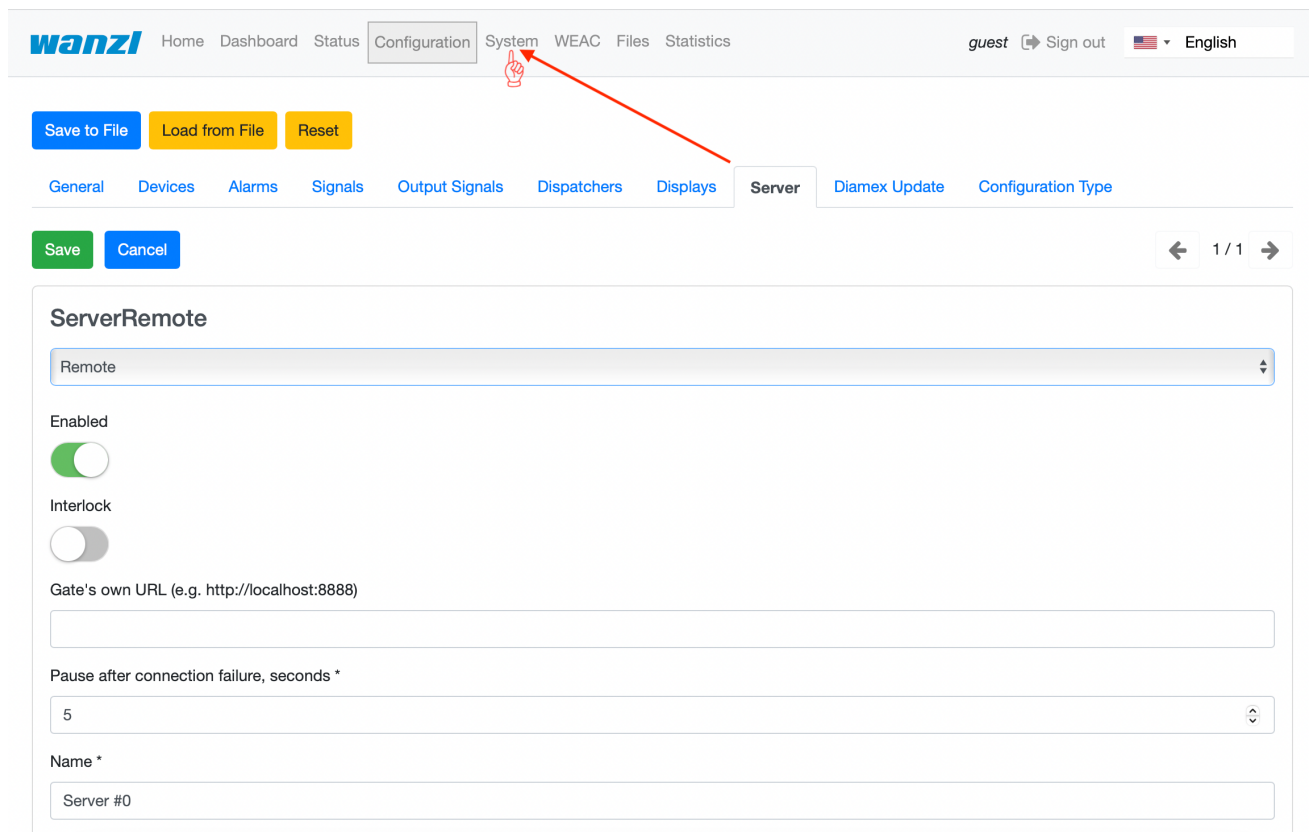

wanzi Home Dashboard Status Configuration **System** WEAC Files Statistics guest [Sign out](#) English

[Save to File](#) [Load from File](#) [Reset](#)

[General](#) [Devices](#) [Alarms](#) [Signals](#) [Output Signals](#) [Dispatchers](#) [Displays](#) **Server** [Diamex Update](#) [Configuration Type](#)

[Save](#) [Cancel](#) 1 / 1

ServerRemote

Remote

Enabled ☒


Interlock ☐

Gate's own URL (e.g. http://localhost:8888)

Pause after connection failure, seconds *

Name *

You will now see the following display, here please press restart once. Now your new gate should be connected.

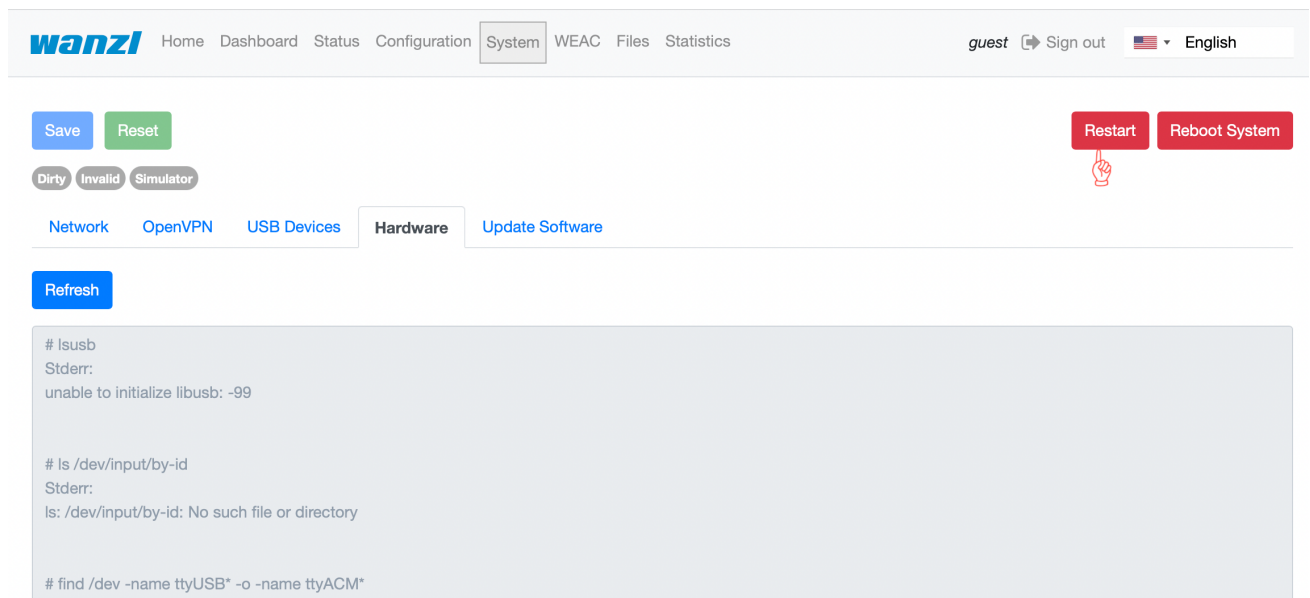

wanzi Home Dashboard Status Configuration **System** WEAC Files Statistics guest [Sign out](#) English

[Save](#) [Reset](#) [Restart](#) [Reboot System](#)

[Dirty](#) [Invalid](#) [Simulator](#)

[Network](#) [OpenVPN](#) [USB Devices](#) **Hardware** [Update Software](#)

[Refresh](#)

```
# lsusb
Stderr:
unable to initialize libusb: -99

# ls /dev/input/by-id
Stderr:
ls: /dev/input/by-id: No such file or directory

# find /dev -name ttyUSB* -o -name ttyACM*
```

Finally, you can check the connection in the **Status** tab. **CONNECTED** must now appear under State.

wanzi Home Dashboard **Status** Configuration System WEAC Files Statistics guest  Sign out  English

 **Server**

Type	Last Error	State	Action
Simulator		Connected	Connection error

 **Displays**

Display Entry	https://gate.maxcrc.de/display/display_entry
Display Exit	https://gate.maxcrc.de/display/display_exit

 **Devices**

Name	Type	State	Failure Reason	Failure
GateModbusGalaxyGateTcp	GateModbusGalaxyGateTcp	Failure	Unit 1: No connection, Unit 2: No connection	☒
Light Bar	Simulator	Ready		☐
Audio Player	Simulator	Ready		☐
Slave FMCU	Simulator	Ready		☐
Led Player	Simulator	Ready		☐
Led Player	Simulator	Ready		☐

Edit existing Gate

`https://<dns-name or ip-address>/gates`

You are in the same view as where you would create a new gate.

Please move the slide switch "Grid view" to the left.


Facilities
Administration ▾
Events ▾
Cards ▾
Statistics
admin ↗ Sign out
🇺🇸 ▾ English


Facilities

New
Grid View 
Location: Select locations ▾
Position: Select positions ▾

Normal
Lock
Entry: Lock Open Service Single Free
Exit: Lock Open Service Single Free
Clearance: On Off
Emergency: On Off

☐ Name	 Position	Location	Mode					Alarm	Clear.	Lock.	Facility
☐ P1_GG1	 P1	Standort	Normal 			Gate is disconnected					
☐ P1_GG2	 P1	Standort	Normal 			Gate is disconnected					
☐ P1_GG3	 P1	Standort	Normal 				Gate is disconnected				
☐ P1_TestGate	 P1	Standort	Normal 				Gate is disconnected				
☐ P1_TestGate2	 P1	Standort	Normal 			Gate is disconnected					
☐ TestGate_P1	 P1	Standort	Gate is disconnected								

In the view click on the name of the gate which you want to edit (in the example TestGate_P1).

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities

New Grid View Location: Select locations Position: Select positions

Normal Lock Entry: Lock Open Service Single Free Exit: Lock Open Service Single Free Clearance: On Off Emergency: On Off

Name	Position	Location	Mode	Alarm	Clear.	Lock.	Facility
☐ P1_GG1	P1	Standort	Normal				
Gate is disconnected							
☐ P1_GG2	P1	Standort	Normal				
Gate is disconnected							
☐ P1_GG3	P1	Standort	Normal				
Gate is disconnected							
☐ P1_TestGate	P1	Standort	Normal				
Gate is disconnected							
☐ P1_TestGate2	P1	Standort	Normal				
Gate is disconnected							
☐ TestGate_P1	P1	Standort					
Gate is disconnected							

In this view, please press the "Edit" function.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities > Facility

Id: 12

Name: TestGate_P1

Display name: TestGate_P1

Position: P1

Disable notifications: ☐

Locked: ☐

Save Cancel New Delete

Cards

Barcode	Employee	Count
Edit		

You can now edit the gate in this view.


Facilities
Administration
Events
Cards
Statistics
admin
Sign out
English

Facilities > Gate Cards

TestGate_P1
P1, Standort
Disconnected

Barcode	Employee	Employee ID	Count
Save Cancel New Teaching Mode Save to File Load from File			

<
>

Remove Gate

`https://<dns-name or ip-address>/gates`

You are in the same view as where you would create a new gate.

Please move the slide switch "Grid view" to the left.


Facilities
Administration
Events
Cards
Statistics
admin
Sign out
English

Facilities

New
Grid View
Location: Select locations
Position: Select positions

Normal Lock Entry: Lock Open Service Single Free Exit: Lock Open Service Single Free Clearance: On Off Emergency: On Off

Name	Position	Location	Mode	Alarm	Clear.	Lock.	Facility
P1_GG1	P1	Standort	Normal				
Gate is disconnected							
P1_GG2	P1	Standort	Normal				
Gate is disconnected							
P1_GG3	P1	Standort	Normal				
Gate is disconnected							
P1_TestGate	P1	Standort	Normal				
Gate is disconnected							
P1_TestGate2	P1	Standort	Normal				
Gate is disconnected							
TestGate_P1	P1	Standort					
Gate is disconnected							

In the view click on the name of the gate which you want to delete (in the example TestGate_P1).

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities

New Grid View Location: Select locations Position: Select positions

Normal Lock Entry: Lock Open Service Single Free Exit: Lock Open Service Single Free Clearance: On Off Emergency: On Off

Name	Position	Location	Mode	Alarm	Clear.	Lock.	Facility
☐ P1_GG1	P1	Standort	Normal				
Gate is disconnected							
☐ P1_GG2	P1	Standort	Normal				
Gate is disconnected							
☐ P1_GG3	P1	Standort	Normal				
Gate is disconnected							
☐ P1_TestGate	P1	Standort	Normal				
Gate is disconnected							
☐ P1_TestGate2	P1	Standort	Normal				
Gate is disconnected							
☐ TestGate_P1	P1	Standort					
Gate is disconnected							

In this view, please press the "Delete" function.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities > Facility

Id: 12

Name: TestGate_P1

Display name: TestGate_P1

Position: P1

Disable notifications: ☐

Locked: ☐


Save Cancel New Delete

Cards

Barcode Employee Count


Edit

To be on the safe side, you will now be asked again whether you really want to delete the element? Please confirm this.

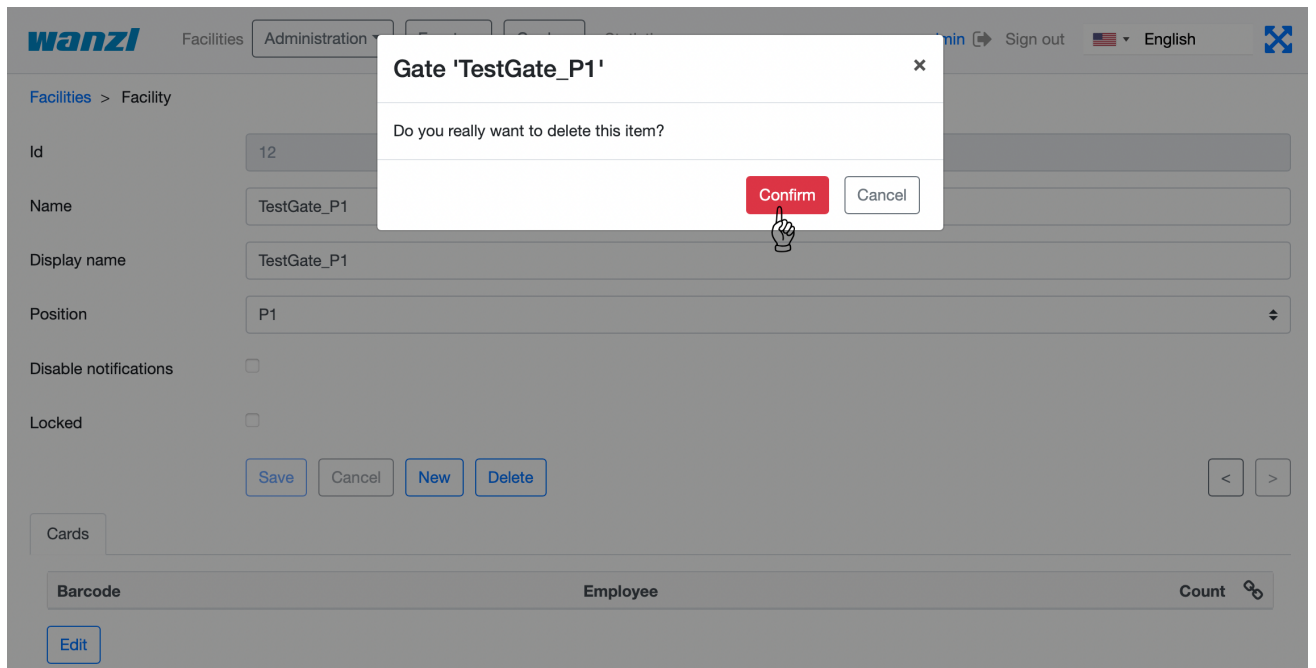

The screenshot shows the Wanzl management dashboard. A modal dialog titled "Gate 'TestGate_P1'" is open, asking "Do you really want to delete this item?". The dialog has a red "Confirm" button and a white "Cancel" button. A mouse cursor is pointing at the "Confirm" button. In the background, the "Facilities" section is visible, showing a form for "TestGate_P1" with fields for Id (12), Name, Display name, Position (P1), Disable notifications, and Locked. There are "Save", "Cancel", "New", and "Delete" buttons at the bottom of the form. Below the form is a "Cards" section with a table header "Barcode" and "Employee", and a "Count" column. An "Edit" button is also present.

After deleting, you will automatically be shown the next gate (in the example P1_TestGate2). Please click on Facilities here.

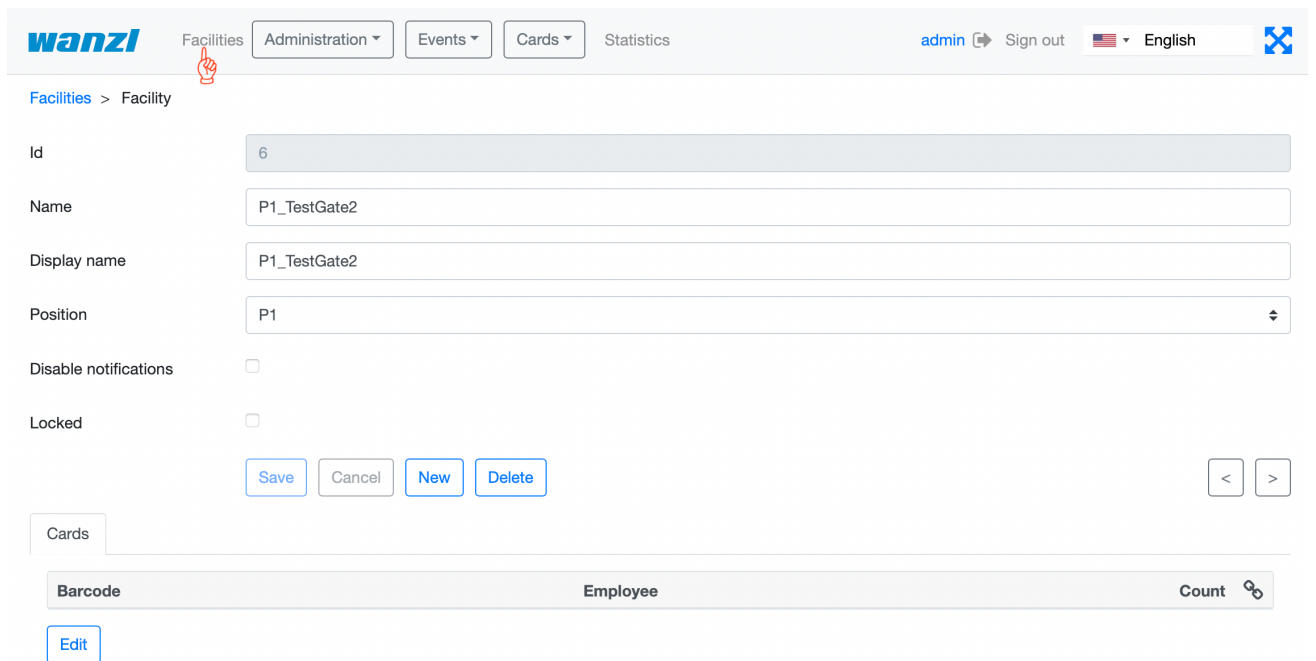

The screenshot shows the Wanzl management dashboard after the deletion of "TestGate_P1". The "Facilities" section is active, and the form now displays "P1_TestGate2" with Id 6. The fields for Name, Display name, Position (P1), Disable notifications, and Locked are visible. The "Save", "Cancel", "New", and "Delete" buttons are at the bottom. The "Cards" section below shows a table with headers "Barcode", "Employee", and "Count". An "Edit" button is also present.

You will then see in the Grid View that Gate TestGate_P1 is missing and has been successfully deleted.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Facilities

New

Grid View

Location: Select locations

Position: Select positions

Normal

Lock

Entry: Lock Open Service Single Free

Exit: Lock Open Service Single Free

Clearance: On Off

Emergency: On Off

☐	Name	Position	Location	Mode					Alarm	Clear.	Lock.	Facility
☐	P1_GG1	P1	Standort	Normal								
Gate is disconnected												
☐	P1_GG2	P1	Standort	Normal								
Gate is disconnected												
☐	P1_GG3	P1	Standort	Normal								
Gate is disconnected												
☐	P1_TestGate	P1	Standort	Normal								
Gate is disconnected												
☐	P1_TestGate2	P1	Standort	Normal								
Gate is disconnected												

Administration

User

https://<dns-name or ip-address>/users

On this page you can see an overview of all users

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Users

New

Location: Select locations

Position: Select positions

Username	First Name	Last Name	Locations & Positions	Groups	Super.	Lock.	Delete
admin					✓		
gate			Standort All positions	gate			
user			Standort All positions	user			
			Standort P1				


Number	Function
1	Create new user
2	Filter users by location

3	Filter users by position
---	--------------------------

Set up new User

Press under [User](#) on the button **New**

`https://<dns-name or ip-address>/new-user`

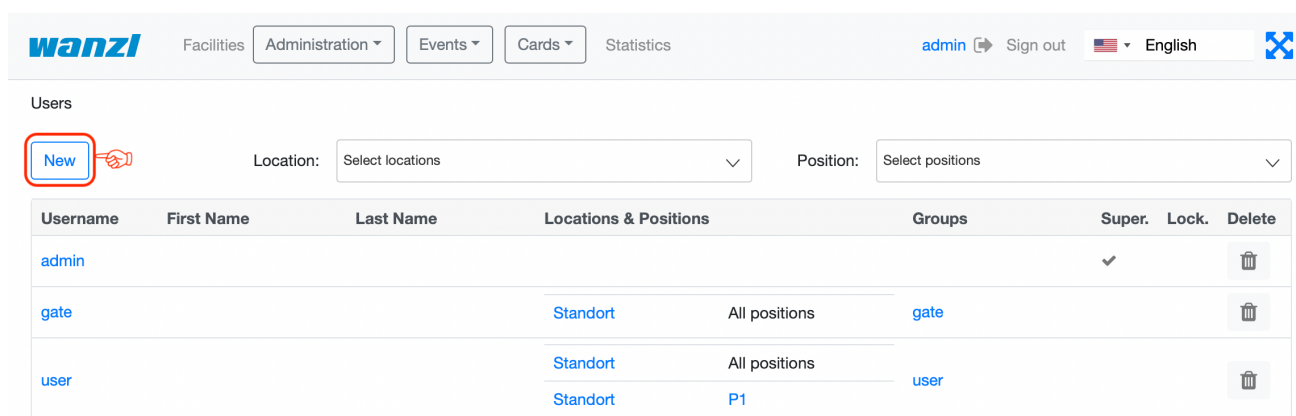

Wanzl Facilities Administration Events Cards Statistics admin Sign out English

Users

New Location: Select locations Position: Select positions

Username	First Name	Last Name	Locations & Positions	Groups	Super.	Lock.	Delete
admin					✓		
gate			Standort	All positions	gate		
user			Standort	All positions	user		
			Standort	P1			

Field Name	Description
Id	Automatically generated unique number of the user
Username*	Username of the user to login
Password*	User's password for login
Email	Email address of the user for sending log messages
First name	User's first name
Last name	Last name of the user
Info	Description of the user
Superuser	The highest rights are assigned to the user
Locked	The user's login is blocked
Disable notifications	The user does not receive any notifications in the FMCU Management Dashboard

* Strictly required fields Through the button **Save** the new user is created.

Edit existing User

Press under [User](#) a user to edit

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Users

New Location: Select locations Position: Select positions

Username	First Name	Last Name	Locations & Positions		Groups	Super.	Lock.	Delete
admin						✓		
gate			Standort	All positions	gate			
user			Standort	All positions	user			
			Standort	P1				

Event Notifications

Under this tab, the notifications can be selected which the user should receive.

Note: If the checkbox **Disable notifications** is set, no notifications are displayed regardless of these settings.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Notifications

Custom Today Yesterday Feb 24, 2022 - Feb 24, 2022 Change 0 / 0

Search...

Date	Recep	Email	Text	Failure
No data to display				

Locations & Positions Tab

You can set different locations in countries and cities. Separate access rights can be defined for each location via the authorization model.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations & Positions

Location	Position
Standort	All positions
Standort	P1

Groups Tab

This tab allows you to customize the user's group memberships.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups

New

Name	Info	Delete
manager		
user		
gate		
alarm_notifications		

Permissions Tab

The user's permissions are displayed under this tab

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups > Group

Id

2

Name

user

Info

Save

Cancel

New

Delete

<

>

Users

Permissions

Name

All changes are applied by clicking the **Save** button.

Groups

`https://<dns-name or ip-address>/groups`

On this page you can see an overview of all groups

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups

New

Name	Info	Delete
manager		
user		
gate		
alarm_notifications		

Set up new Group

`https://<dns-name or ip-address>/new-group`

Click under **Gruppen** the button **New**

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups

New

Name	Info	Delete
manager		
user		
gate		
alarm_notifications		

please enter a group name, optional you can write a description to the group

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups > New Group

Id

Name

Info

Save

Cancel

New

Delete

<

>

Users Permissions

Username	Email	First name	Last name	Info
Edit				

Field Name	Description
Id	Automatically generated unique number of the group
Name	Name of the Group
Info	Description of the Group

* Strictly required fields

The new group is created by clicking the **Save** button.

Edit existing Group

Click under [Gruppen](#) the Group you want edit

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups

New

Name	Info	Delete
manager		
user		
gate		
alarm_notifications		

Users Tab

This tab allows you to customize the members of the group.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Groups > Group

Id2

Nameuser

Info

SaveCancelNewDelete

<>

UsersPermissions

Username	Email	First name	Last name	Info
user				

Edit

Permissions Tab

The permissions that are inherited by the members of the group are displayed under this tab.
All changes are applied by clicking the **Save** button.

UsersPermissions

Name

Can read 'model'

Can read 'permission'

Can read 'user'

Can read 'group'

Can read 'user group'

Can read 'group permission'

Can read 'gate'

Can read 'gate state'

Can read 'location'

Can read 'country'

Positions

https://<dns-name or ip-address>/cities

On this page you can see an overview of all positions

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Positions

New

Name	Location	Delete
P1	Standort	

Set up new Position

https://<dns-name or ip-address>/new-city

Under [Positions](#) click on the button **New**

Enter the name of the position and assign the position to a location using the dropdown field.

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Positions > New Position

Id

Name

Location

Standort

Save

Cancel

New

Delete

<

>

Click on the **Save** button to create the position

Edit existing Position

Under [Positions](#) click to edit the position

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Positions

New

Name	Location	Delete
P1	Standort	

Here you can edit the position name and location

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Positions > Position

Id

1

Name

P1

Location

Standort

Save

Cancel

New

Delete

<

>

Locations

<https://<dns-name or ip-address>/countries>

On this page you can see an overview of all locations

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations

New

Name	Info	Delete
Standort		

Set up new Location

<https://<dns-name or ip-address>/new-country>

Press under [Locations](#) the button **New**

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations

New

Name	Info	Delete
Standort		

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations > New Location

Id

Name

Info

Save

Cancel

New

Delete

<

>

Field Name	Description
Id	Automatically generated unique number of the location
Name*	Location name
Info	Description of the location

* Strictly required fields

Click on the **Save** button to create the position

Edit existing Location

Under [Location](#) , click the location you want to edit

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations

New

Name	Info	Delete
Standort		

Here you can edit the name, code and info of the location

wanzl Facilities Administration Events Cards Statistics admin Sign out English

Locations > Location

Id

1

Name

Standort

Info

Save

Cancel

New

Delete

<

>

Locations & Positions

<https://<dns-name or ip-address>/locations>

Here you can see an overview of all positions and their assigned locations

 Facilities Administration Events Cards Statistics admin Sign out English

Locations & Positions

Location	Position
Standort	All positions
Standort	P1

Configuration

<https://<dns-name or ip-address>/configurations>

 Facilities Administration Events Cards Statistics admin Sign out English

Configuration

General

Notification interval, sec.

10

Facility disconnect timeout, sec.

15

CSV delimiter

,

Zip exported files

☐

Show menu 'Room Occupancies'

☐

Show menu 'Tickets'

☐

Show menu 'Interlocks'

☐

Email

From

x@example.com

Hostname

example.com

Port


465

Events

Events

`https://<dns-name or ip-address>/events`

In this view, the events of all access controls are shown in an intuitive list view. There are filtering options and a name search for the events.

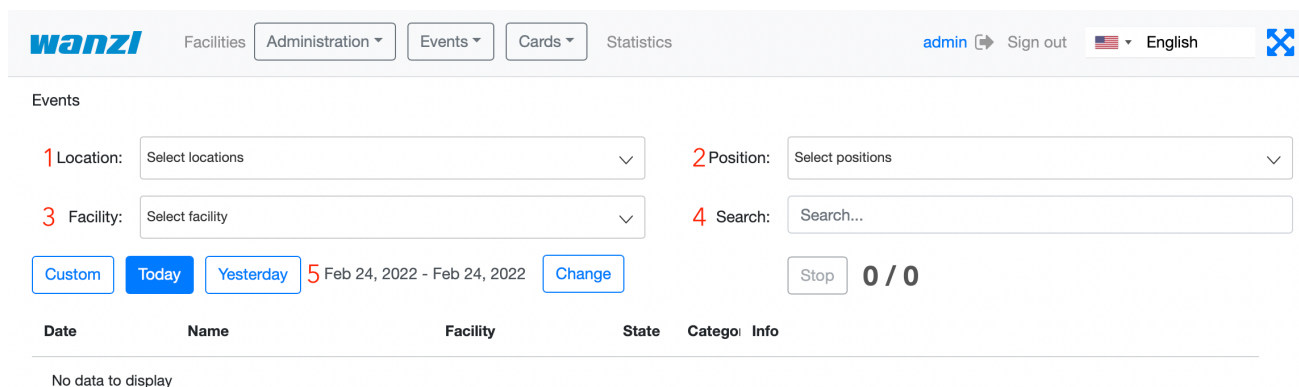

The screenshot shows the Wanzl Events management interface. At the top, there is a navigation bar with the Wanzl logo and tabs for Facilities, Administration, Events, Cards, and Statistics. The Events tab is active. On the right, there are links for 'admin', 'Sign out', and a language selector set to 'English'. Below the navigation bar, there are four filters: 1. Location (dropdown), 2. Position (dropdown), 3. Facility (dropdown), and 4. Search (text input). Below these filters, there are buttons for 'Custom', 'Today', 'Yesterday', and a date range '5 Feb 24, 2022 - Feb 24, 2022' with a 'Change' button. A 'Stop' button and a counter '0 / 0' are also present. Below the filters, there is a table with columns: Date, Name, Facility, State, Category, and Info. The table currently displays 'No data to display'.


The following filters can be set:

1. Location
2. Position
3. Facility
4. Search by Event name
5. Time Period

Event Definitions

`https://<dns-name or ip-address>/event-definitions`

In this view, all events that the FMCU contains are listed and their event definition groups, supported states and categories are assigned.

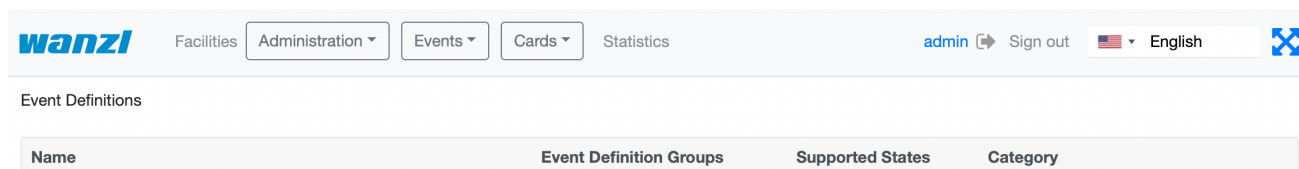

The screenshot shows the Wanzl Event Definitions management interface. At the top, there is a navigation bar with the Wanzl logo and tabs for Facilities, Administration, Events, Cards, and Statistics. The Events tab is active. On the right, there are links for 'admin', 'Sign out', and a language selector set to 'English'. Below the navigation bar, there is a table with columns: Name, Event Definition Groups, Supported States, and Category. The table is currently empty.

Event definition Groups

`https://<dns-name or ip-address>/event-definition-groups`

All event definition groups are listed under this tab.


Facilities
Administration
Events
Cards
Statistics
admin
Sign out
English

Event Definition Groups

New

Name	Events	Info	Delete
Alarm events	One or more devices failed		
	All devices are operational		
	State Fire Alarm		
	Counter Pass		
	Unauthorized Access		
	Tailgating		
	Motionless Object		
	Door Break-In		
	Proceed Alarm		
	Server Alarm		
	Invalid Ticket		
	Fire Alarm		
	Emergency		
	No Dispatcher		
	Valid Ticket		

Create a new Event definition Group

Click [Event definition groups](#) on the Button **New**


Facilities
Administration
Events
Cards
Statistics
admin
Sign out
English

Event Definition Groups

New

Name	Events	Info	Delete
Alarm events	One or more devices failed		
	All devices are operational		
	State Fire Alarm		
	Counter Pass		
	Unauthorized Access		
	Tailgating		
	Motionless Object		
	Door Break-In		
	Proceed Alarm		
	Server Alarm		
	Invalid Ticket		
	Fire Alarm		
	Emergency		
	No Dispatcher		
	Valid Ticket		

800x800px

Fieldname	Description
ID	Automatically generated unique group number
Name	Name of the group

Info	Group description
------	-------------------

* Absolutely required fields

Under the **Event definition** tab select the event definitions that are to be assigned to the group.

Event Subscriptions

`https://<dns-name or ip-address>/event-subscriptions`

There is the possibility to link groups of alarm messages with groups of users. As a result, only group members are notified of alarm messages that are also grouped,

wanzl Facilities Administration ▾ Events ▾ Cards ▾ Statistics admin ➞ Sign out  ▾ English 

Event Subscriptions > New Event Subscription

Id

Name

Group

manager ▾

Event definition group

Alarm events ▾

Locked

☐

Info

Save

Cancel

New

Delete

<

>

Fieldname	Description
ID	internal value
Group	Summary of users
Ereignisdefinitionsgruppe	Event definition group
Locked	Notifications deactivated/activated
Info	Description field

Notifications

`https://<dns-name or ip-address>/notifications`

Benachrichtigungen

Benutzerdefiniert

Heute

Gestern

0 / 0

09.04.2021 - 09.04.2021

Ändern

Suche...

Datum	Empfänger	Email	Text	Fehler
-------	-----------	-------	------	--------

Cards

Karten

Land:

Stadt:

Gate:

Barcode	Mitarbeiter	Anzahl	Gate	
number1	number2	1	gate_de_fra	
			gate_ma_mar	
			gate_de_lan	
employee1	employee2	1	gate_de_fra	
			gate_ma_mar	
			gate_de_lan	
test1	test2	1	gate_de_fra	
			gate_ma_mar	
			gate_de_lan	

Karten bearbeiten

Speichern
Abbrechen
Alle markieren
Alle unmarkieren
Gates auswählen...
Hinzufügen
Löschen

Gesamt: 3 Hinzugefügt: 1 Verändert: 0 Gelöscht: 0

	Barcode	Mitarbeiter	Mitarbeiter ID	Anzahl		
☐				1	☐	
	Das Feld ist erforderlich					
	+					
☐	number1	number2	number3	1	☐	
	gate_de_fra x	gate_ma_mar x	gate_de_lan x	+		
☐	employee1	employee2	employee3	1	☐	
	gate_de_fra x	gate_ma_mar x	gate_de_lan x	+		

Field	Description
-------	-------------

Barcode	Card content that is captured by the reader
Employee	Description field
Employee ID	Description field
Quantity	Number of accesses for this card

Statistics

In this view, all activities for the assigned access controls are shown. You can adjust the view with date filters. It is possible to group the screen output, e.g. only to evaluate the number per day or month. Finally, the data can be exported in Excel format or CSV-format.

Land: Länder auswählen

Stadt: Städte auswählen

Gate: Gate auswählen

Benutzerdefiniert

Heute

Gestern

Diese Woche

Letzte Woche

Diesen Monat

Vorheriger Monat

Zwei vorherige Monate

Drei vorherige Monate

Sechs vorherige Monate

Dieses Jahr

Vorheriges Jahr

01.10.2020 - 31.03.2021

Ändern

Aktualisieren

Speichern als .csv

Speichern als .xlsx

Gruppierung: Aus

Nach Tag

Nach Monat

Datum	Gate	Stadt	Land	Eingang	Ausgang
15.10.2020 09:53:54	gate_de_3ra	Frankfurt	Germany		No ticket
15.10.2020 09:59:09	gate_de_3ra	Frankfurt	Germany	No ticket	
15.10.2020 10:14:19	gate_de_3ra	Frankfurt	Germany	Free	
17.11.2020 15:22:19	gate_de_3ra	Frankfurt	Germany	No ticket	