


People Counter Dashboard

Inhaltsverzeichnis	
1 Setup XOVIS cameras	1
1.1 Add XOVIS cameras	1
1.2 Delete API cameras	2
2 Setup Areas	3
2.1 Add Areas.	3
2.2 Delete Areas.	4

Setup XOVIS cameras


Add XOVIS cameras

1. To add a new XOVIS camera, you firstly need to select the **Settings** tab.
2. Click on the **Add** button.

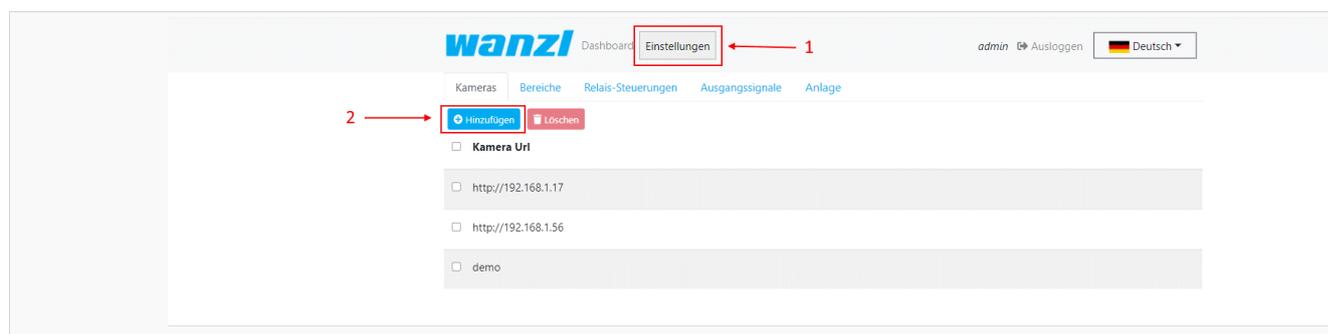

3. Here you should specify the camera URL.
4. Specify a login to access the camera.
5. Specify a password to access the camera.
6. In this field specify the URL of your server (this field will be used for PUSH notification configuration on the camera side).
7. Here, specify the MAC of your camera.

8. Save it.

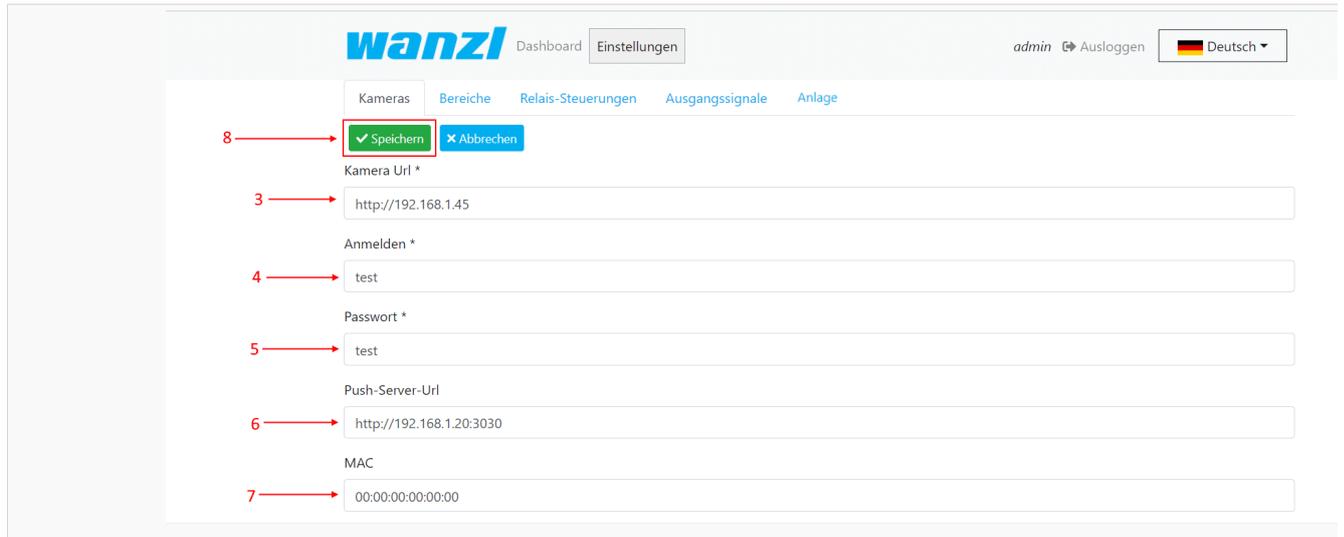


The screenshot shows the 'Einstellungen' (Settings) page in the Wanzl dashboard. The 'Kameras' tab is active. At the top, there are navigation tabs: 'Kameras', 'Bereiche', 'Relais-Steuerungen', 'Ausgangssignale', and 'Anlage'. Below these are two buttons: 'Speichern' (Save) and 'Abbrechen' (Cancel). The 'Speichern' button is highlighted with a red box and labeled '8'. Below the buttons are several input fields, each with a red arrow pointing to it and a number: 'Kamera Url *' (3) with value 'http://192.168.1.45', 'Anmelden *' (4) with value 'test', 'Passwort *' (5) with value 'test', 'Push-Server-Url' (6) with value 'http://192.168.1.20:3030', and 'MAC' (7) with value '00:00:00:00:00:00'.

Delete API cameras

1. To remove unwanted cameras, mark them.

2. **Be careful! Do not remove a cameras that are used.** Click on the **Delete** button.

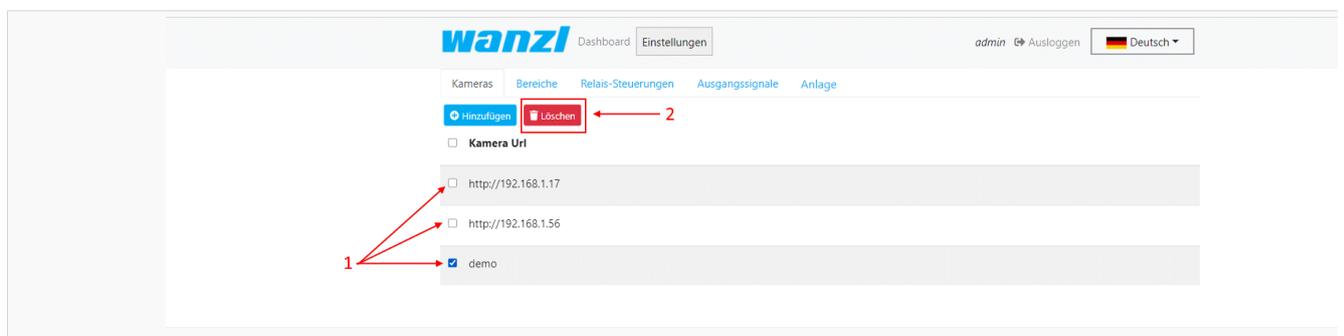


The screenshot shows the 'Einstellungen' page with the 'Kameras' tab active. At the top, there are navigation tabs: 'Kameras', 'Bereiche', 'Relais-Steuerungen', 'Ausgangssignale', and 'Anlage'. Below these are two buttons: 'Hinzufügen' (Add) and 'Löschen' (Delete). The 'Löschen' button is highlighted with a red box and labeled '2'. Below the buttons is a list of cameras under the heading 'Kamera Url'. The list contains three entries: 'http://192.168.1.17', 'http://192.168.1.56', and 'demo'. The 'demo' entry is selected with a blue checkmark and labeled '1'.

Setup Areas

Add Areas.

1. Add a new area, you firstly need to go to **Settings**.
2. Select the **Areas** tab.
3. And Then click on the **Add** button.
4. Enter here the name of the area.
5. Here you should specify a unique name without spaces and starts with a lowercase letter. This is a service field. For example: If you specified the name "Test", you can specify a unique name "test".
6. Here you can select a theme for the area display. For example:
7. Here you can choose the background for the "Basic" theme. If you want to add an image, you should upload it up to the server. More details on the link upload files
8. This field can be used in case if you want to specify an Offset for counter(for example when people are already in the area, but camera's counter is zero).

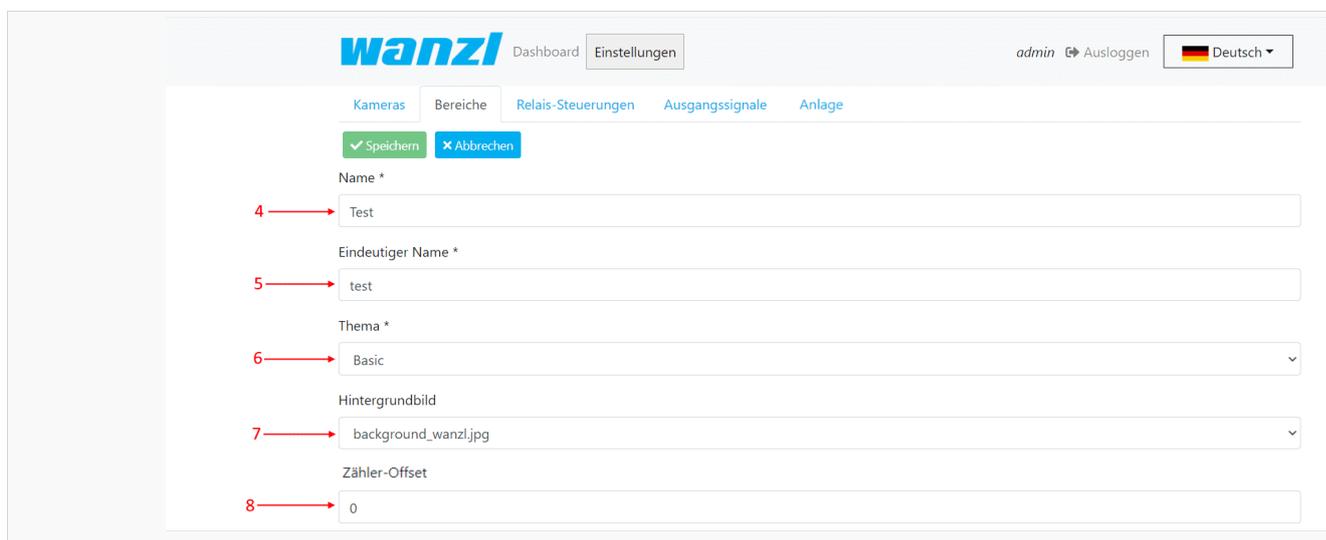

The screenshot shows the 'Einstellungen' (Settings) page in the Wanzl dashboard. The 'Bereiche' (Areas) tab is selected. At the top, there are buttons for 'Speichern' (Save) and 'Abbrechen' (Cancel). The form contains the following fields:

- Name ***: Input field containing 'Test'. A red arrow labeled '4' points to this field.
- Eindeutiger Name ***: Input field containing 'test'. A red arrow labeled '5' points to this field.
- Thema ***: Dropdown menu with 'Basic' selected. A red arrow labeled '6' points to this field.
- Hintergrundbild**: Dropdown menu with 'background_wanzl.jpg' selected. A red arrow labeled '7' points to this field.
- Zähler-Offset**: Input field containing '0'. A red arrow labeled '8' points to this field.

9. Click on the **Add** button to add a camera.

People Counter Dashboard

10. Select the camera that was added earlier. If you do not know how to add a camera to click on this link setup XOVIS cameras

11. Choose the detect type.

12. Enter the name line.

13. Here we specify the maximum capacity of the number of people.

14. Here you can specify the schedule restart counter time. If you need to specify more than 2 values, be sure to separate them with a semicolon.

If you need to change the text translation on Area by interval:

15. To add the ability to select a language, click the **Add** button as many times as you need the languages.

16. Choose a language.

17. Enter the language switching interval in seconds.

18. And save it.



Delete Areas.

1. To remove unwanted Areas, mark them.

2. And then click on the **Delete** button.

