

Benutzerhandbuch




Inhaltsverzeichnis

1 Armaturenbrett	1
1.1 Beschreibung der Hauptelemente	1
1.2 VU-Zustand und Ereignisse	2
1.3 Projekte	5
2 Benutzerverwaltung	7
2.1 Verfügbare Zugriffsebenen	7
2.2 Erstellen eines neuen Benutzers	7
2.3 Zuweisen eines Projekts zu einem Benutzer	8
3 Tickets	8
3.1 Ticket Generator	8
3.2 Drucken generierter Tickets	10
4 RFID Karten	11
4.1 RFID Karten Generator	11
4.2 Generieren von RFID-Karten	11
4.3 Zuweisen eines Partners zu einer generierten Karte	11
4.4 Karte einer Verkaufseinheit zuweisen	12
4.5 Eine Karte einem Projekt zuweisen	14
5 E-Mail Benachrichtigungen	14

Armaturenbrett

Beschreibung der Hauptelemente

Das Dashboard wurde entwickelt, um dem Benutzer eine bequeme Möglichkeit zu bieten, im System registrierte Ausrüstungsgegenstände zu verwalten und zu steuern. Jedes Dashboard-Element stellt ein physisches Gerät dar und besteht aus den folgenden Elementen:

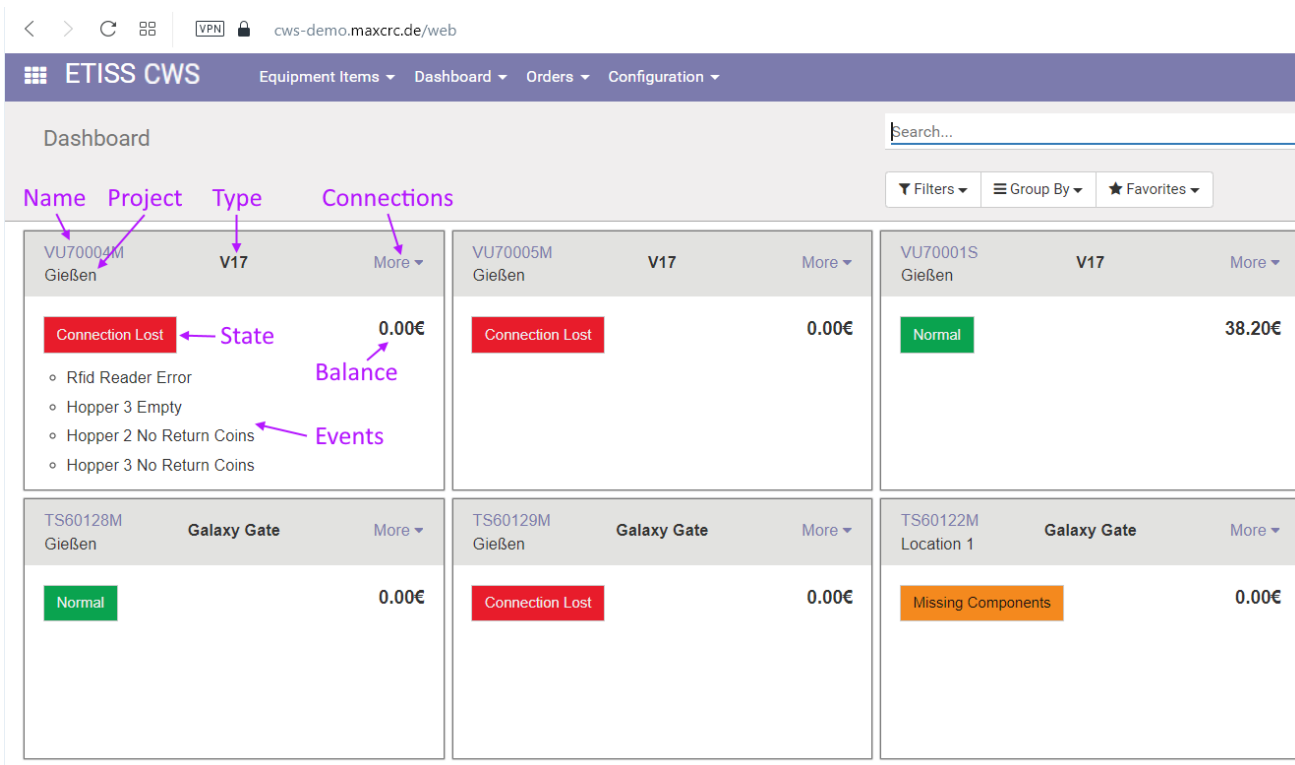


The screenshot shows a web interface for 'ETISS CWS' with a navigation menu (Equipment Items, Dashboard, Orders, Configuration) and a search bar. The main content is a grid of six cards representing different vending machines. Each card displays the machine name, project, type, connection status, balance, and a list of recent events. Annotations in purple highlight these elements:

- Name:** Points to the machine name (e.g., VU70004M Gießen).
- Project:** Points to the project name (e.g., V17).
- Type:** Points to the machine type (e.g., V17).
- Connections:** Points to the 'More' link for connections.
- State:** Points to the 'Connection Lost' status label.
- Balance:** Points to the '0.00€' balance value.
- Events:** Points to the list of events (e.g., Rfid Reader Error, Hopper 3 Empty).

- **Name:** Name des Ausrüstungsgegenstands.
- **Projekt:** Ein Projekt, zu dem dieser Ausrüstungsgegenstand gehört.
- **Typ:** Art des Ausrüstungsgegenstands. Bei Verkaufseinheiten kann dies entweder V21 oder V7 oder andere Modifikationen sein.
- **Verbindungen:** Dieser Link ermöglicht es, sich schnell mit dem Element entweder mit ssh oder VNC zu verbinden und den Status zu überprüfen.
- **Balance:** Zeigt im Fall von VU den aktuellen Geldbetrag in der Vending Unit an.
- **Events:** Zeigt die Liste der kürzlich stattgefundenen Ereignisse an.
- **Zugang:** Zeigt den aktuellen Zustand des Ausrüstungsgegenstands an.

VU-Zustand und Ereignisse


Wenn etwas mit der Verkaufseinheit oder anderen Geräten passiert, sendet sie ein Ereignis an den Server. Sie können den aktuellen Status der Einheit und frühere Ereignisse anzeigen, indem Sie eine Taste auf dem Dashboard drücken:

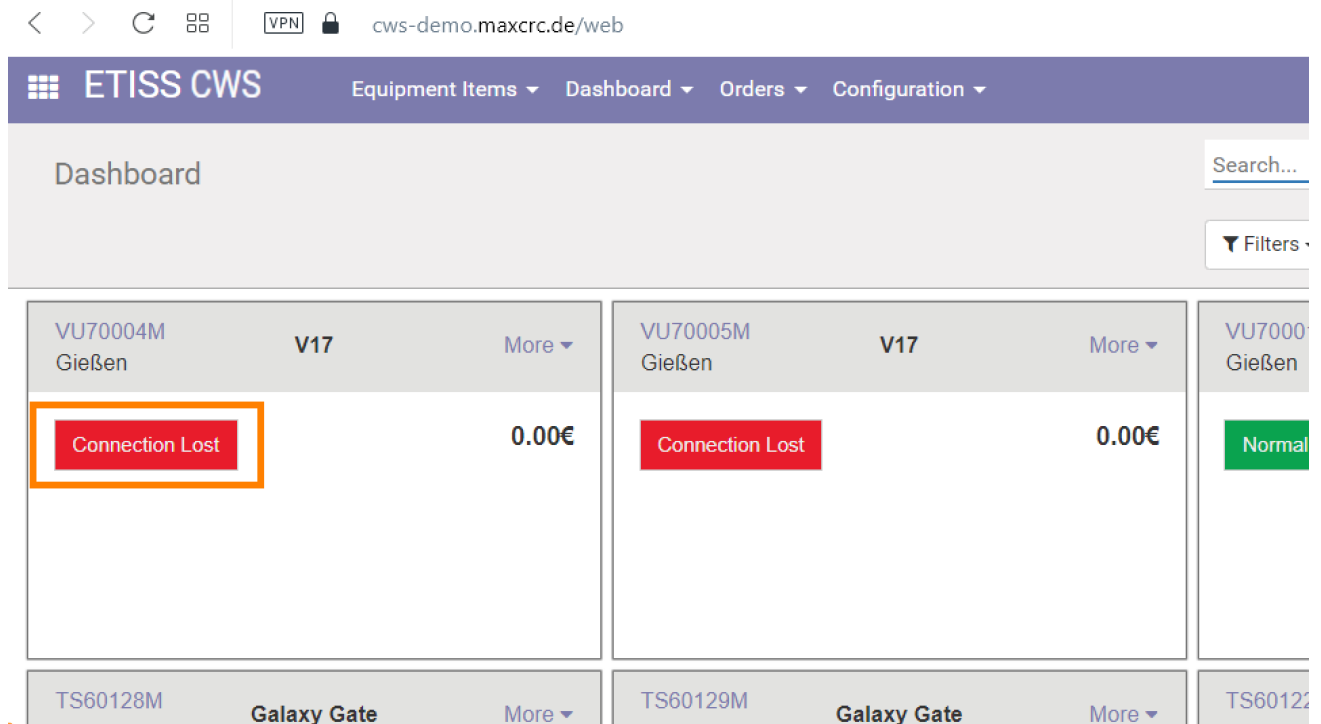

The screenshot shows the ETISS CWS dashboard. The top navigation bar includes "Equipment Items", "Dashboard", "Orders", and "Configuration". The main content area is titled "Dashboard" and features a search bar and a "Filters" dropdown. Below this is a table of equipment items. The first two items, VU70004M and VU70005M, both labeled "Gießen" and "V17", show a "Connection Lost" status in a red box. The third item, VU70005M, shows a "Normal" status in a green box. The bottom row shows items labeled "Galaxy Gate".

Item ID	Item Name	Model	Status	Value
VU70004M	Gießen	V17	Connection Lost	0.00€
VU70005M	Gießen	V17	Connection Lost	0.00€
VU70005M	Gießen	V17	Normal	
TS60128M	Galaxy Gate			
TS60129M	Galaxy Gate			
TS60122M	Galaxy Gate			


Jedes Ereignis in der Liste ist farbcodiert und hat eine andere Gewichtung. Rötlichere Farben haben ein größeres Gewicht und müssen sofort überprüft werden. Sie können eine detaillierte Farbbeschreibung sehen, indem Sie auf die Schaltfläche "Legende" klicken.

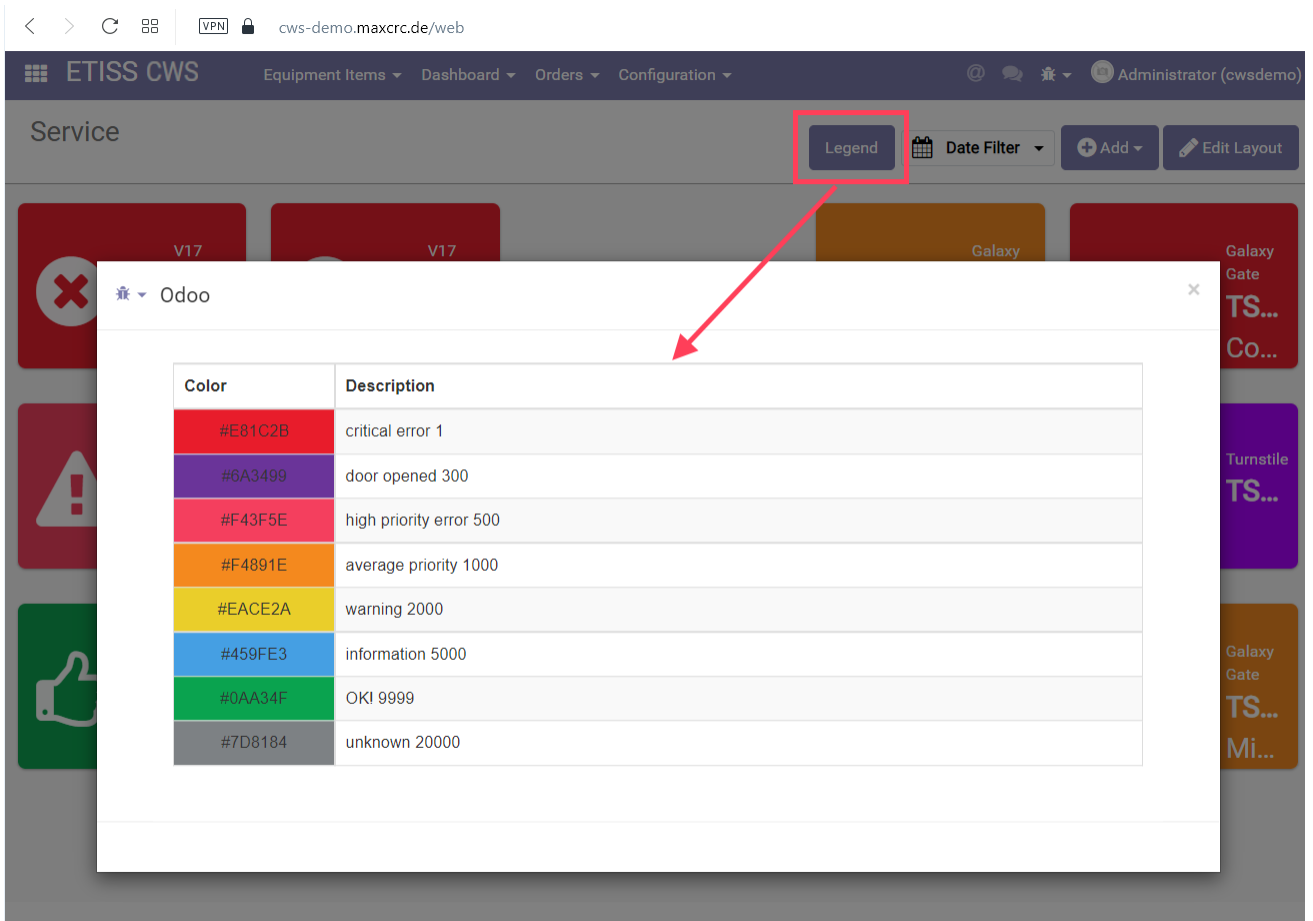

The screenshot shows the ETISS CWS web interface. A 'Legend' dialog box is open, displaying a table of error codes and their descriptions. The 'Legend' button in the background is highlighted with a red box, and a red arrow points from it to the dialog box. The dialog box has a title bar with 'Odoo' and a close button. The table contains the following data:

Color	Description
#E81C2B	critical error 1
#6A3499	door opened 300
#F43F5E	high priority error 500
#F4891E	average priority 1000
#EACE2A	warning 2000
#459FE3	information 5000
#0AA34F	OKI 9999
#7D8184	unknown 20000

Die Ereignisliste kann nach Datum und Gewicht sortiert werden.

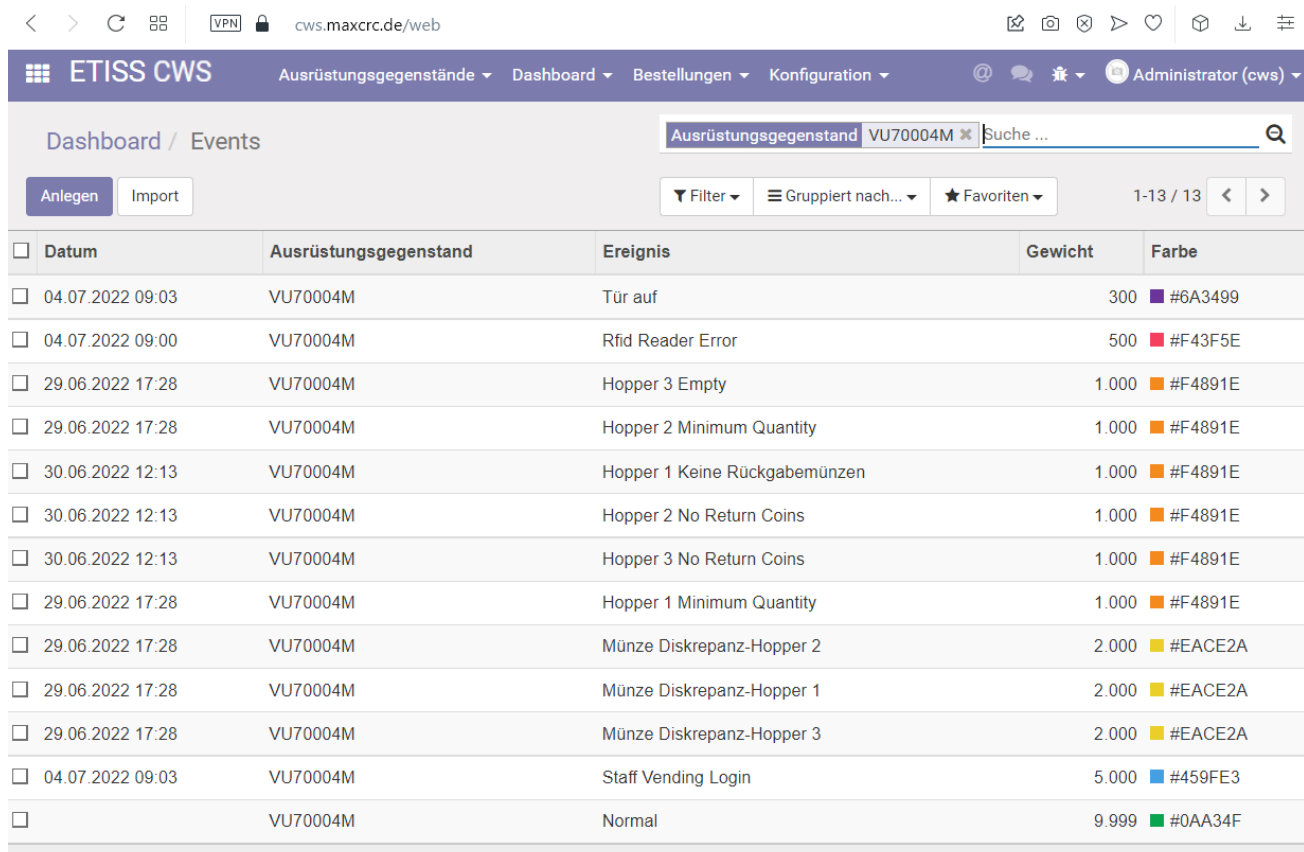

Dashboard / Events

Ausrüstungsgegenstand VU70004M Suche ...


Anlegen Import

Filter Gruppieren nach... Favoriten 1-13 / 13

Datum	Ausrüstungsgegenstand	Ereignis	Gewicht	Farbe
04.07.2022 09:03	VU70004M	Tür auf	300	#6A3499
04.07.2022 09:00	VU70004M	Rfid Reader Error	500	#F43F5E
29.06.2022 17:28	VU70004M	Hopper 3 Empty	1.000	#F4891E
29.06.2022 17:28	VU70004M	Hopper 2 Minimum Quantity	1.000	#F4891E
30.06.2022 12:13	VU70004M	Hopper 1 Keine Rückgabemünzen	1.000	#F4891E
30.06.2022 12:13	VU70004M	Hopper 2 No Return Coins	1.000	#F4891E
30.06.2022 12:13	VU70004M	Hopper 3 No Return Coins	1.000	#F4891E
29.06.2022 17:28	VU70004M	Hopper 1 Minimum Quantity	1.000	#F4891E
29.06.2022 17:28	VU70004M	Münze Diskrepanz-Hopper 2	2.000	#EACE2A
29.06.2022 17:28	VU70004M	Münze Diskrepanz-Hopper 1	2.000	#EACE2A
29.06.2022 17:28	VU70004M	Münze Diskrepanz-Hopper 3	2.000	#EACE2A
04.07.2022 09:03	VU70004M	Staff Vending Login	5.000	#459FE3
	VU70004M	Normal	9.999	#0AA34F

Projekte

Jeder Ausrüstungsgegenstand kann zu einem bestimmten Projekt gehören. Sie können Projekte im Menü "ETISS CWS" -> „Konfiguration“ -> "Projekte" konfigurieren. Nachdem Sie einem Projekt ein Element hinzugefügt haben, können Sie die Sichtbarkeit der Projektelemente für bestimmte Benutzer einschränken, indem Sie dem Projekt einen Benutzer zuweisen. Danach kann jeder Benutzer nur Ausrüstungsgegenstände sehen und bearbeiten, die zu einem bestimmten Projekt gehören.

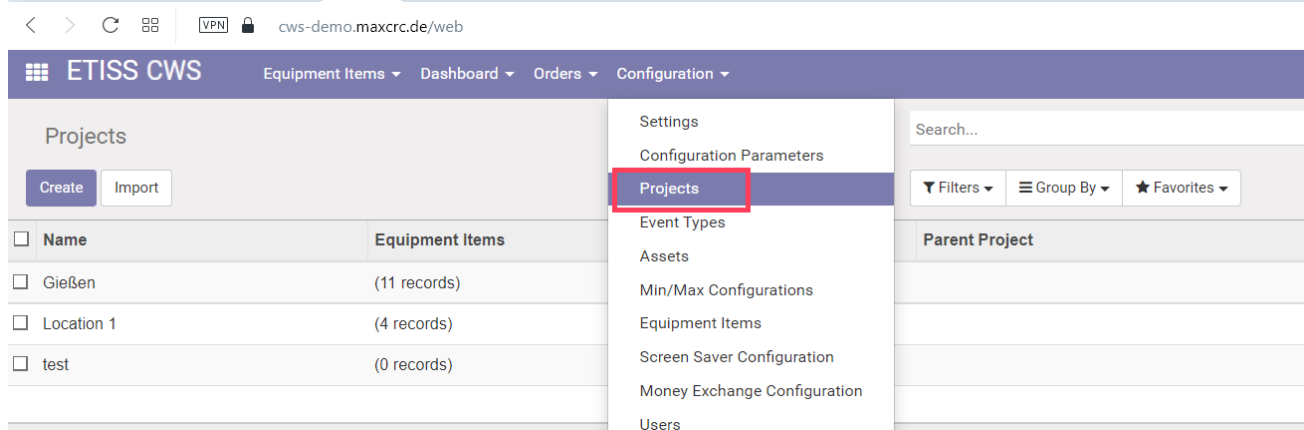

Equipment Items Dashboard Orders Configuration

Projects

Create Import


Name	Equipment Items
Gießen	(11 records)
Location 1	(4 records)
test	(0 records)

- Settings
- Configuration Parameters
- Projects**
- Event Types
- Assets
- Min/Max Configurations
- Equipment Items
- Screen Saver Configuration
- Money Exchange Configuration
- Users

Search...

Filters Group By Favorites

Parent Project

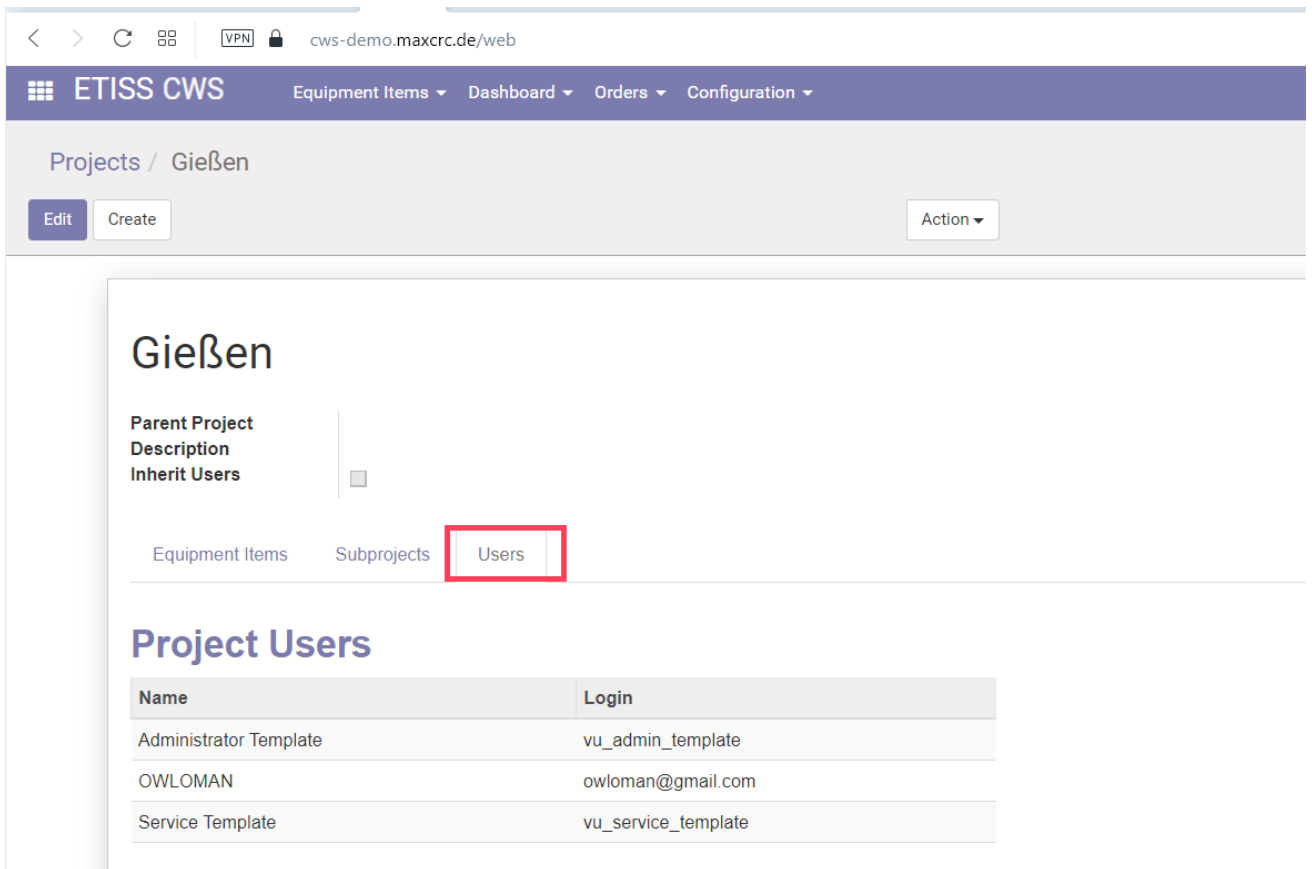

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration

Projects / Gießen

Edit Create Action

Gießen


Parent Project
Description
Inherit Users

Equipment Items Subprojects **Users**

Project Users

Name	Login
Administrator Template	vu_admin_template
OWLOMAN	owloman@gmail.com
Service Template	vu_service_template

Es gibt auch eine nette Möglichkeit, Ausrüstungsgegenstände nach ihrem Projekt oder Typ zu gruppieren.

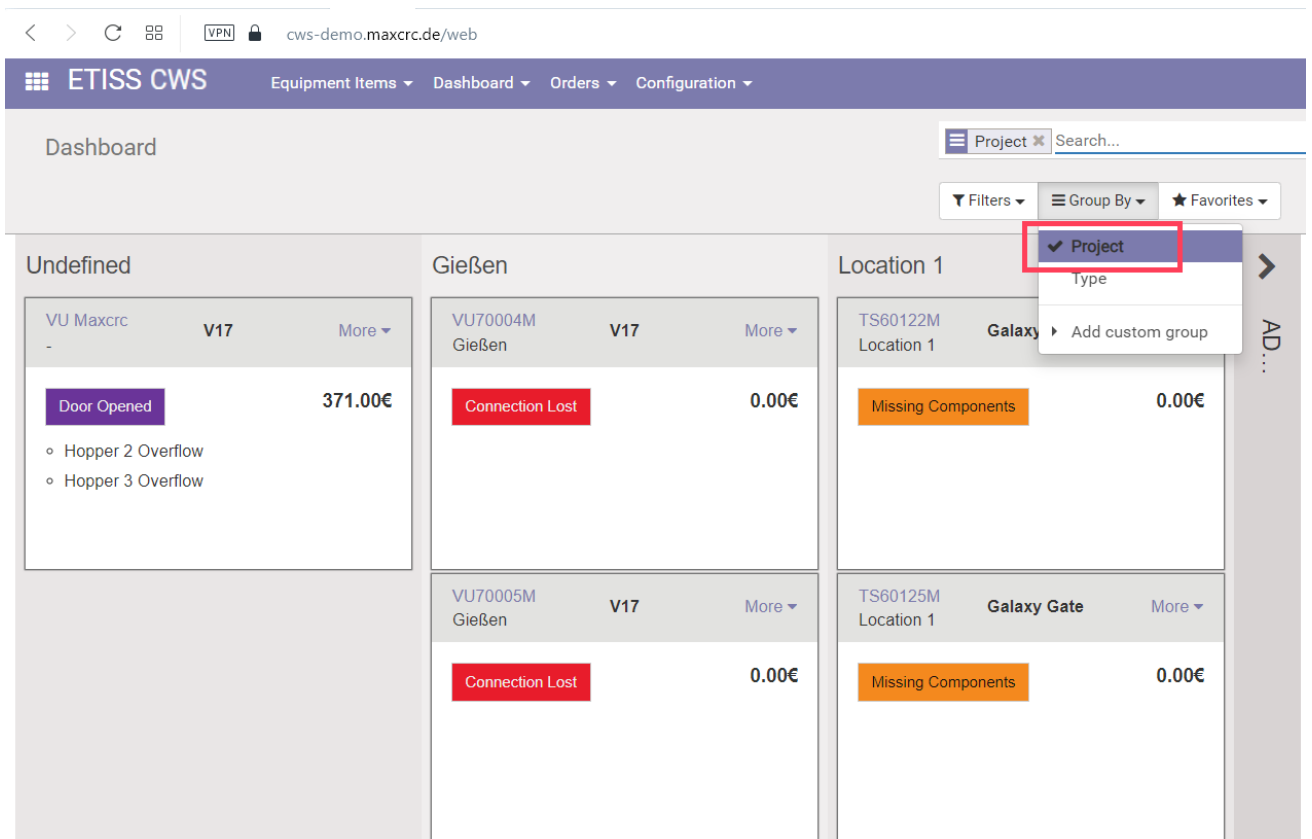

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration

Dashboard

Project Search...

Filters Group By Favorites

Project
Type
Add custom group

Undefined	Gießen	Location 1
<p>VU Maxcrc V17 More</p> <p>Door Opened 371.00€</p> <ul style="list-style-type: none"> Hopper 2 Overflow Hopper 3 Overflow 	<p>VU70004M Gießen V17 More</p> <p>Connection Lost 0.00€</p>	<p>TS60122M Location 1 Galaxy More</p> <p>Missing Components 0.00€</p>
	<p>VU70005M Gießen V17 More</p> <p>Connection Lost 0.00€</p>	<p>TS60125M Location 1 Galaxy Gate More</p> <p>Missing Components 0.00€</p>


Benutzerverwaltung

Verfügbare Zugriffsebenen

The system has 3 access levels:

- **Cashier - "vu_cashier_template"**: Works with money, has limited access to other functions of the system.
- **Service - "vu_service_template"**: Maintains the equipment and can control it's various aspects.
- **Administrator - "vu_admin_template"**: Verfügt über Administratorrechte und Adresse für alle Funktionen des ETISS CWS-Systems.

Um sich mit einer dieser Rollen beim System anzumelden, öffnen Sie die Anmeldeseite, geben Sie die gewünschte Benutzeranmeldung (E-Mail) ein, geben Sie das Passwort ein und klicken Sie auf "Login".

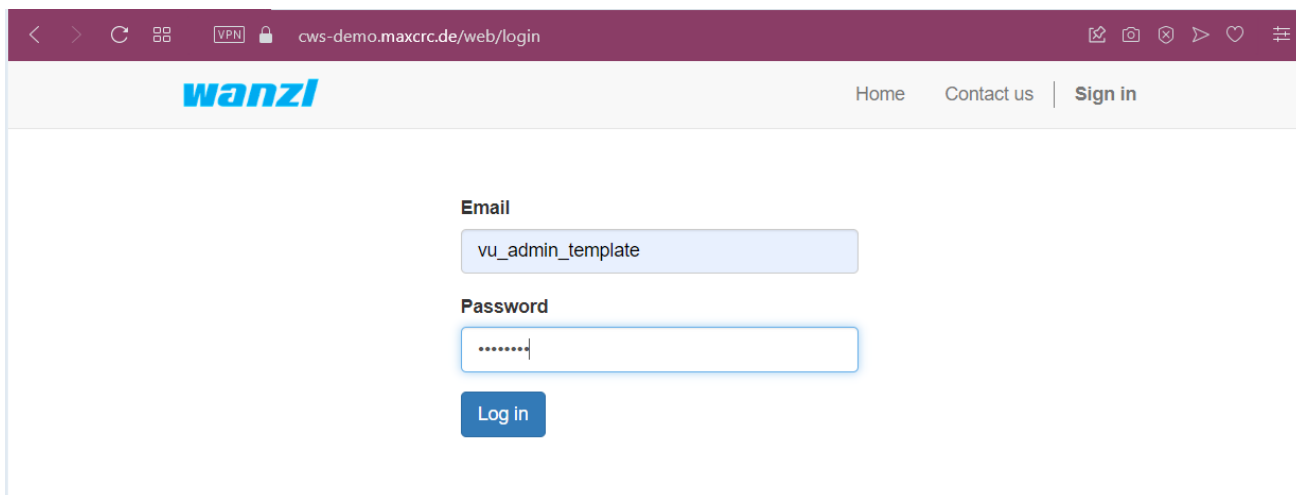

The screenshot shows a web browser window with the URL `cws-demo.maxcrc.de/web/login`. The page features a purple header with the **wanzl** logo and navigation links for [Home](#), [Contact us](#), and [Sign in](#). The main content area contains a login form with the following fields:

- Email**: A text input field containing the value `vu_admin_template`.
- Password**: A password input field with masked characters (dots).
- Log in**: A blue button to submit the login information.

Erstellen eines neuen Benutzers


Um einen neuen Benutzer anzulegen, navigieren Sie zum Menü "ETISS CWS" -> "Konfiguration" -> "Partnerregistrierung" und füllen Sie die folgenden Felder aus:

- **Name**: Benutzername.
- **Login**: Ein Login, das der Benutzer sein wird, um sich beim System anzumelden.
- **Passwort**: Passwort des Benutzers.
- **Vorlage**: Zugriffslevel-Vorlage ("Kassierer-Vorlage" - funktioniert nur mit Geld, "Service-Vorlage" - kümmert sich um die Einheiten, "Administrator-Vorlage" - Lokaler GOD).
- **Projekt**: Der Benutzer sieht und kann nur mit Ausrüstungsgegenständen arbeiten, die zu hier ausgewählten Projekten gehören.

800px

Zuweisen eines Projekts zu einem Benutzer

Um beim Erstellen eines neuen Benutzers ein Projekt zuzuweisen, klicken Sie im Bereich "Projekt" auf "Element hinzufügen", wählen Sie das gewünschte Projekt aus und klicken Sie auf die Schaltfläche "Hinzufügen". Wenn Sie bereits einen Benutzer erstellt haben, können Sie ein Projekt öffnen, in dem Sie den Benutzer hinzufügen möchten, dann die Registerkarte "Benutzer" auswählen und dort einen Benutzer hinzufügen.

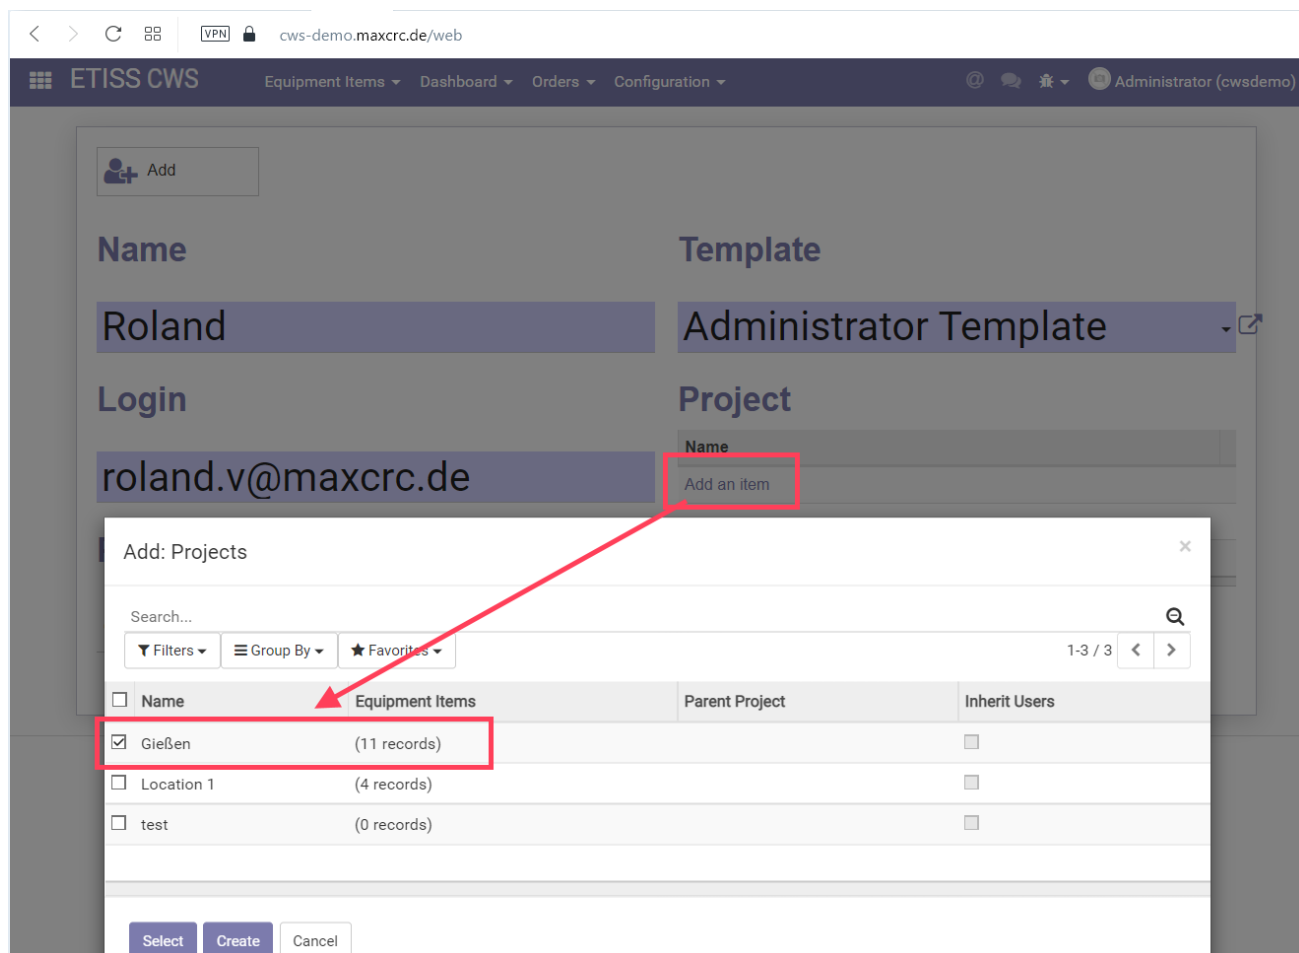

The screenshot shows the ETISS CWS web interface. The user 'Roland' is being created with the email 'roland.v@maxcrc.de' and the 'Administrator Template'. The 'Project' dropdown is open, showing a list of projects. The 'Gießen' project is selected, and a red arrow points from the 'Add an item' button to it. The table below shows the list of projects:



Name	Equipment Items	Parent Project	Inherit Users
<input checked="" type="checkbox"/> Gießen	(11 records)		<input type="checkbox"/>
<input type="checkbox"/> Location 1	(4 records)		<input type="checkbox"/>
<input type="checkbox"/> test	(0 records)		<input type="checkbox"/>

Tickets

Ticket Generator

Der Ticket-Generator ermöglicht es, eine bestimmte Anzahl von Tickets zu generieren und diese bei Bedarf auszudrucken. Diese Funktion kann zum Beispiel verwendet werden, wenn Sie viele Freikarten erstellen und an Personen verteilen müssen.


Um den Ticketgenerator zu öffnen, navigieren Sie zu "Hauptmenü" -> "Tickets" -> "Konfiguration" -> "Ticketgenerator":

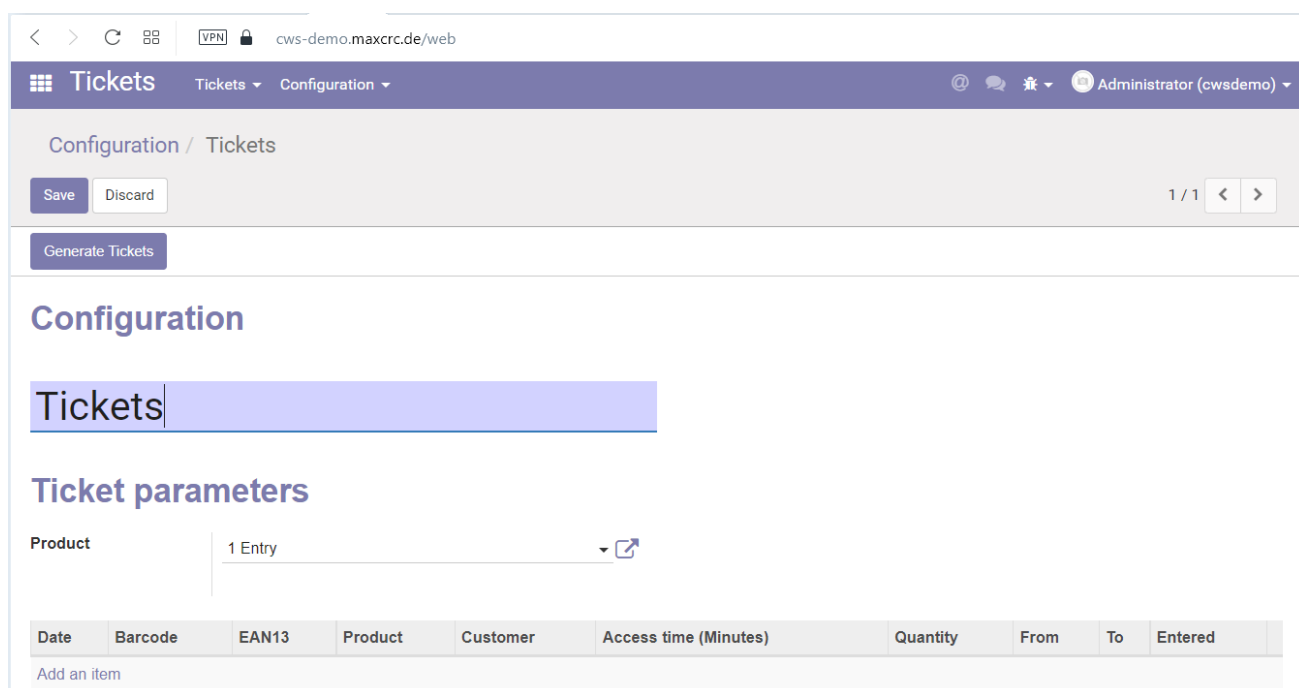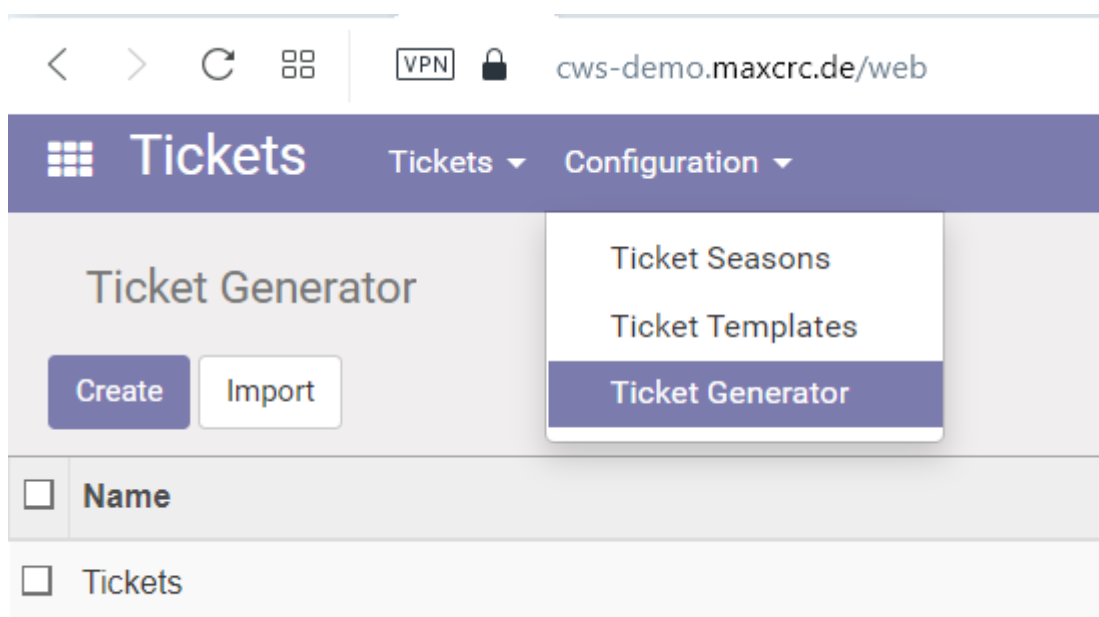

Füllen Sie als Nächstes die folgenden Felder aus:

- **Name:** Der Name des generierten Tickets (nirgendwo aufgedruckt, nur ein Anzeigename).
- **Produkt:** Das Produkt, auf dessen Grundlage Tickets generiert werden. (Beispiel: Um kostenlose Tickets zu generieren, müssen Sie hier ein kostenloses Produkt auswählen).


Klicken Sie auf *Speichern* und danach auf die Schaltfläche "Tickets generieren".

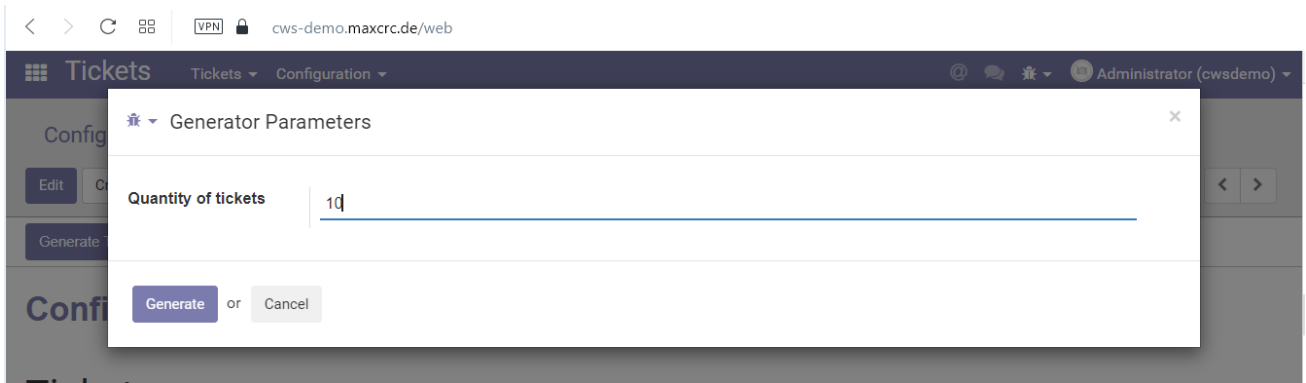

Wählen Sie die Anzahl der zu generierenden Tickets und klicken Sie auf **Generate**

Drucken generierter Tickets

Sobald Tickets erstellt wurden, können Sie sie ausdrucken, indem Sie auf die Schaltfläche **Erzeugte Tickets drucken** klicken.

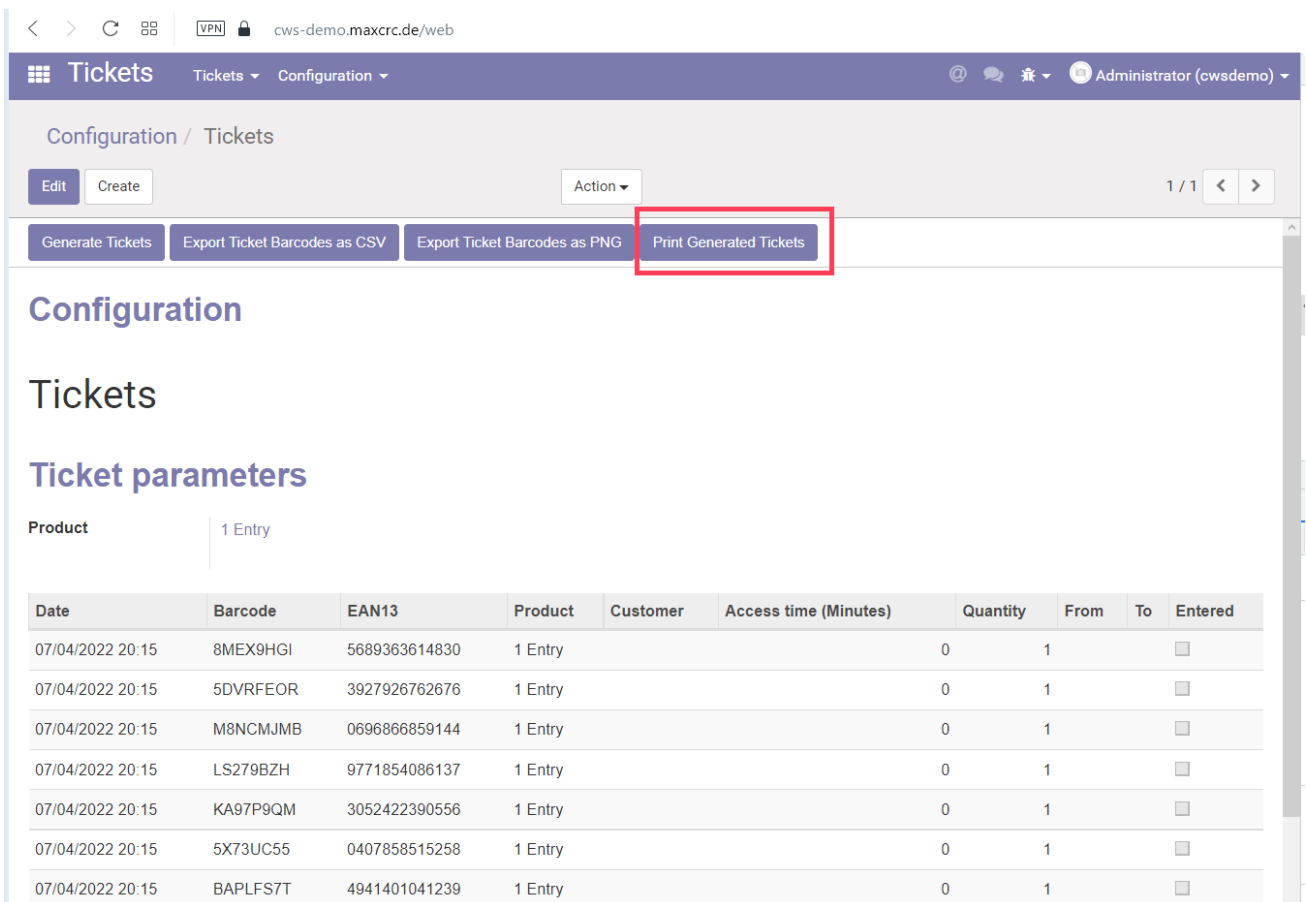


RFID Karten

RFID Karten Generator

Der RFID-Kartengenerator kann mit dem Lesegerät zur Massenregistrierung von RFID-Karten verwendet werden. Ein Bediener scannt die Karte mit dem Lesegerät, diese Karten werden dann der Liste der Karten hinzugefügt, die durch Zeilenumbruch, Leerzeichen, Komma oder Semikolon getrennt sind. Und schließlich können diese Karten nach Auswahl des Kartentyps mit einem Klick im System registriert werden.

Generieren von RFID-Karten

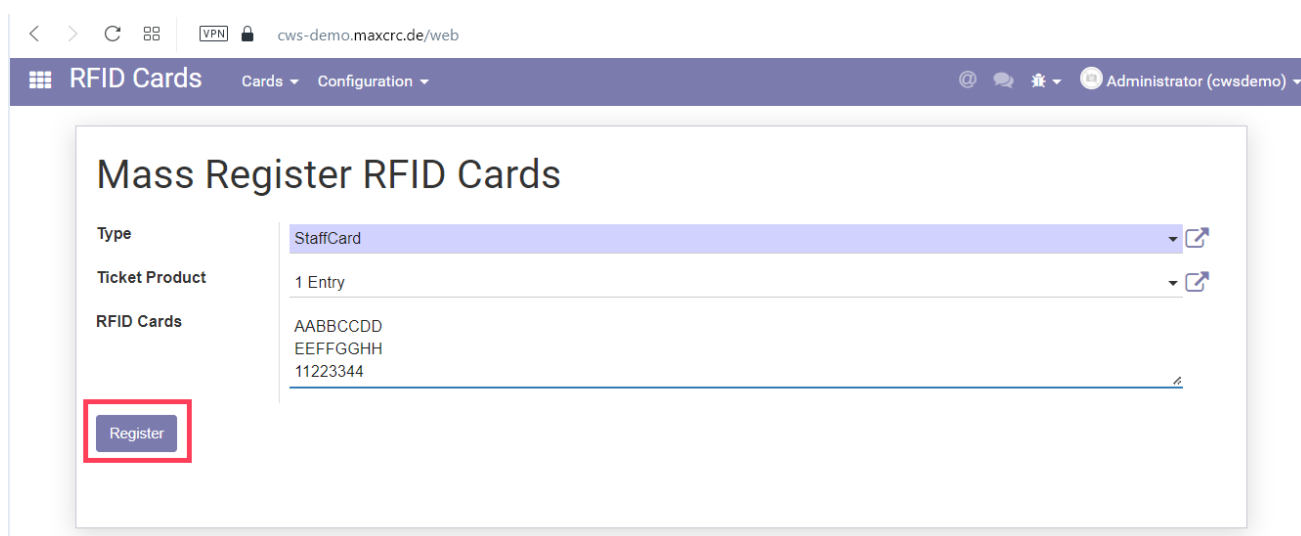

Field	Value
Type	StaffCard
Ticket Product	1 Entry
RFID Cards	AABBCCDD EEFFGGHH 11223344


Um den RFID-Kartengenerator zu verwenden, gehen Sie zu „RFID-Karten“ -> „Konfiguration“ -> „Massenregister“ und füllen Sie die folgenden Felder aus:

- **Typ:** Der Typ der zu registrierenden RFID-Karte.
- **Ticket Produkt:** Das Produkt, auf dem das verknüpfte Ticket basiert.
- **RFID Karten:** Ein Array von zu registrierenden RFID-Karten. Diese können vom Kartenleser abgerufen oder manuell über die Zwischenablage eingefügt werden. Das System versteht die folgenden Kartentrennzeichen: **Zeilenumbruch**, **Leerzeichen**, **Komma** oder **Semikolon**.

Zuweisen eines Partners zu einer generierten Karte

Nachdem alle erforderlichen Karten erfolgreich generiert wurden, können Sie diesen einen zuvor erstellten Partner zuweisen. Dies kann durch Öffnen einer Karte und Auswählen eines Partners erfolgen.


Öffnen Sie im Menü „RFID-Karten“ -> „Karten“ -> „Registrierte Karten“ eine beliebige Karte, klicken Sie auf „Bearbeiten“ und wählen Sie im Feld „Partner“ den gewünschten Partner aus.

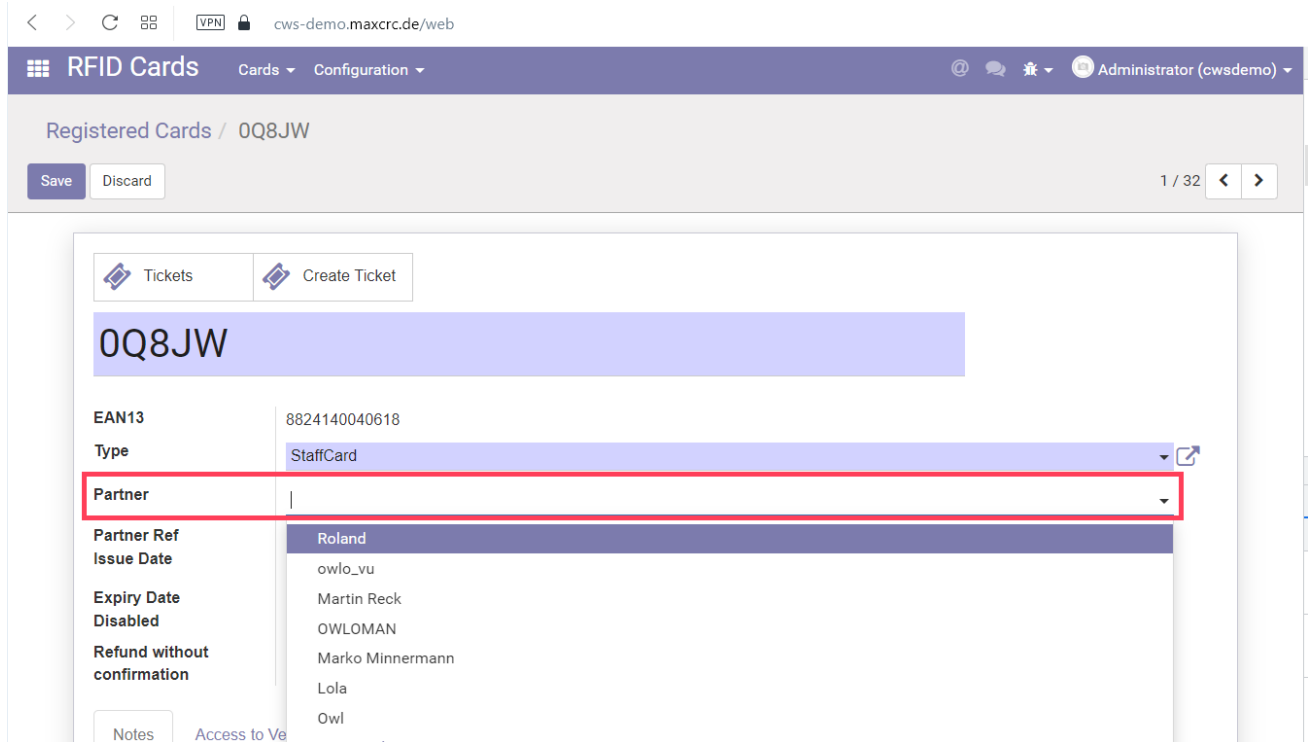

Jetzt ist diese Karte einem Partner zugeordnet.

Karte einer Verkaufseinheit zuweisen

Nachdem einer Karte ein Partner zugewiesen wurde, kann diese Karte mit einer bestimmten Zugangsebene mit dem Verkaufsgerät verknüpft werden. Melden Sie sich dazu als Administrator an, suchen und öffnen Sie eine Verkaufseinheit, mit der Sie eine Karte verknüpfen müssen, und klicken Sie auf ihre Konfigurationseinstellungen. In diesem Fall ist es der Link „VU Single FMCU“.

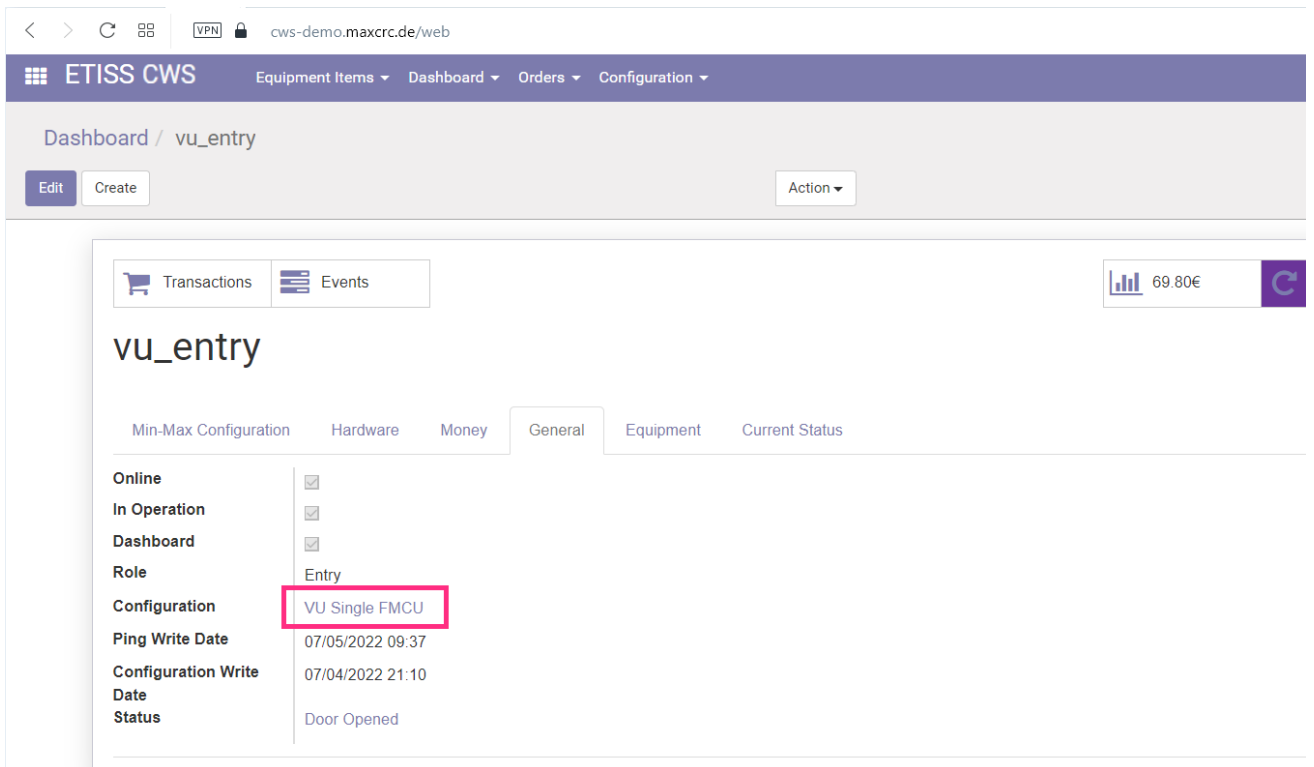

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration

Dashboard / vu_entry


Transactions | Events | 69.80€

vu_entry

Min-Max Configuration | Hardware | Money | **General** | Equipment | Current Status

- Online
- In Operation
- Dashboard
- Role: Entry
- Configuration: **VU Single FMCU**
- Ping Write Date: 07/05/2022 09:37
- Configuration Write Date: 07/04/2022 21:10
- Status: Door Opened

Auf der Registerkarte „Servicekarten“ können Sie Karten hinzufügen und die entsprechende Zugriffsebene festlegen.

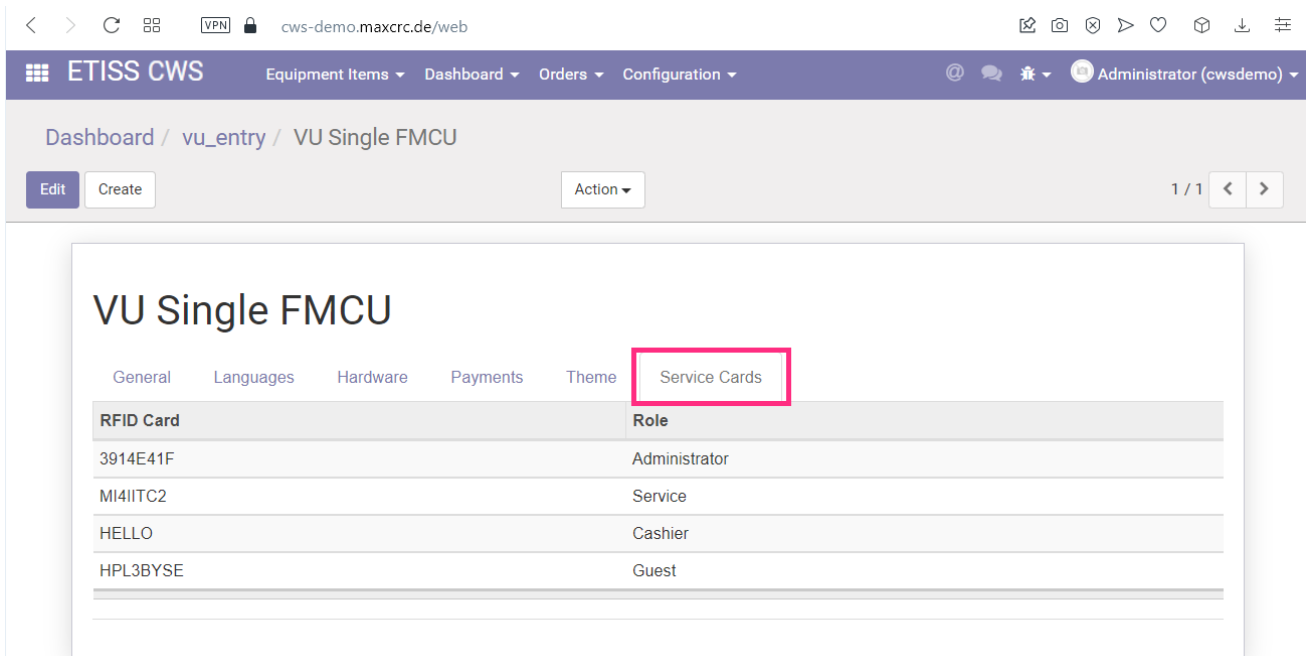

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration | Administrator (cwsdemo)

Dashboard / vu_entry / VU Single FMCU

1 / 1


VU Single FMCU

General | Languages | Hardware | Payments | Theme | **Service Cards**

RFID Card	Role
3914E41F	Administrator
MI4IITC2	Service
HELLO	Cashier
HPL3BYSE	Guest

Eine Karte einem Projekt zuweisen

Die Karte kann auch mit einem Projekt verknüpft werden. Beachten Sie jedoch, dass die Zuweisung einer Karte zu einer bestimmten VU-Konfiguration Vorrang vor der Zuweisung zum Projekt hat. Um eine Karte einem Projekt zuzuweisen, gehen Sie in das Menü „ETISS CWS“ -> „Konfiguration“ -> „Projekte“, wählen Sie ein Projekt aus und verknüpfen Sie auf der Registerkarte „Dienstkarten“ eine Karte mit entsprechendem Zugangslevel.

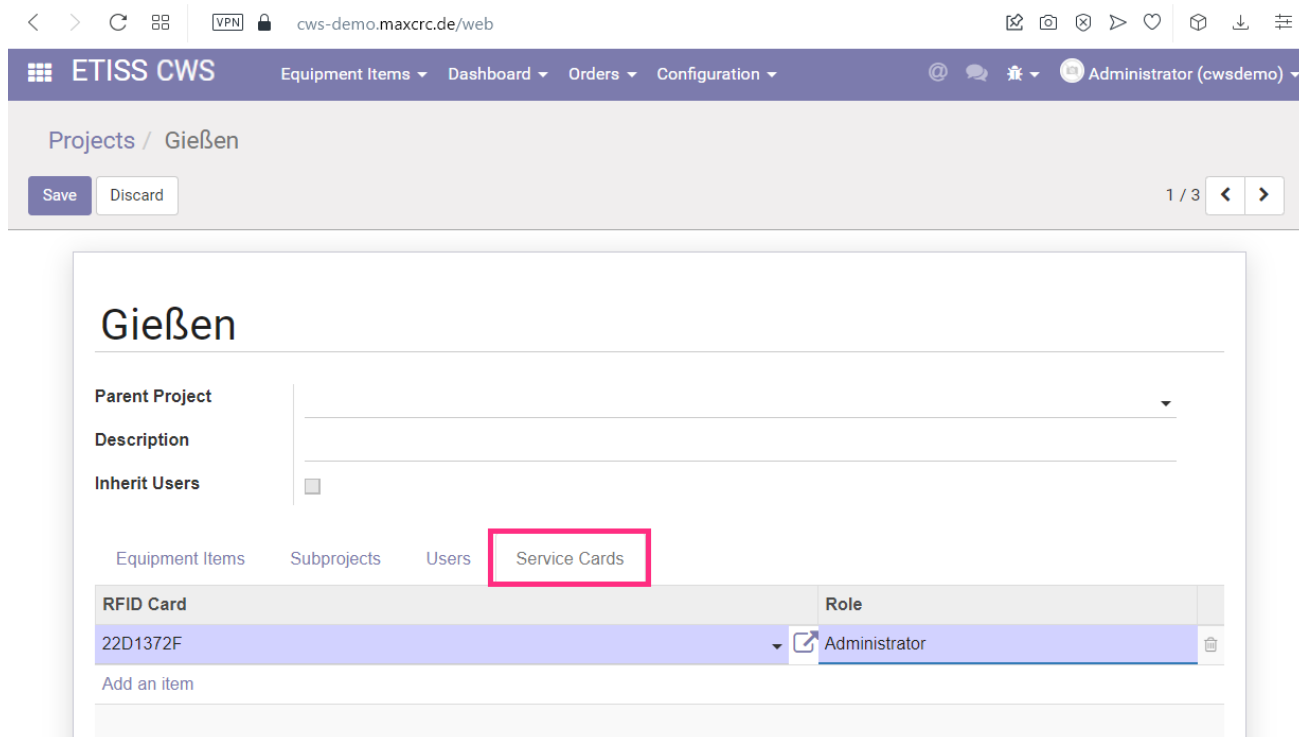

The screenshot shows the ETISS CWS web interface. The browser address bar displays 'cws-demo.maxcrc.de/web'. The navigation menu includes 'Equipment Items', 'Dashboard', 'Orders', and 'Configuration'. The user is logged in as 'Administrator (cwsdemo)'. The current page is 'Projects / Gießen'. Below the navigation, there are 'Save' and 'Discard' buttons, and a page indicator '1 / 3'. The main content area is titled 'Gießen' and contains a form with fields for 'Parent Project', 'Description', and 'Inherit Users'. Below the form, there are tabs for 'Equipment Items', 'Subprojects', 'Users', and 'Service Cards'. The 'Service Cards' tab is highlighted with a red box. Below the tabs, there is a table with the following data:

RFID Card	Role
22D1372F	Administrator

Below the table, there is a link 'Add an item'.

E-Mail Benachrichtigungen

Auf ETISS Global öffnen sie das Klappenmenü 'Ausrüstungsgegenstände' dort gehen sie auf E-Mail-Benachrichtigung.

ETISS CWS ~ User Guide



Inhaltsverzeichnis


1 DASHBOARD	17
1.1 Main elements description	17
1.2 VU state and events	18
1.3 Muted events	19
1.4 Projects	20
1.5 VU TABS AND PROPERTIES	22
1.5.1 Transactions button	22
1.5.2 Money statuses button	23
1.5.3 Orders button	24
1.5.4 Reload events button	24
1.5.5 Current events button	25
1.5.6 Events button	25
1.5.7 Min-Max configuration tab	26
1.5.8 Hardware tab	27
1.5.9 Money tab	28
1.5.10 General tab	29
1.5.11 Equipment tab	30
1.6 FMCU TABS AND PROPERTIES	30
1.6.1 Hardware FMCU tab	31
1.6.2 General FMCU tab	32
1.6.3 Equipment FMCU tab	32
1.6.4 Equipment FMCU button	33
2 REMOTE MONITORING AND CONTROL	34
2.1 SSH	34
2.2 VNC	35
2.3 VNC View	37
2.4 Remote tab	37
3 USER MANAGEMENT	37
3.1 Available access levels	37
3.2 Creating a new user	38
3.3 Assigning a project to a user	39
4 TICKETS	40
4.1 Ticket generator	40
4.2 Printing generated tickets	42
5 RFID CARDS	43
5.1 RFID cards generator	43
5.2 Generating RFID cards	43
5.3 Assigning a partner to generated card	43
5.4 Assigning a card to Vending Unit	44

5.5 Assigning a card to project	45
5.6 PRINTING TEMPLATES	46
5.6.1 Finding your printer model	46
5.6.2 Template structure	47
5.6.3 Ticket template	48
5.6.4 Order Receipt template	50
5.6.5 Money Dump template	51
5.6.6 Events Dump template	53
5.6.7 Card Terminal Receipt template	55
5.6.8 Additional service templates	56

DASHBOARD

Main elements description

The dashboard is designed to give user a convenient way of managing and controlling equipment items registered in the system. Each dashboard item represents a physical device and consists of the following elements:

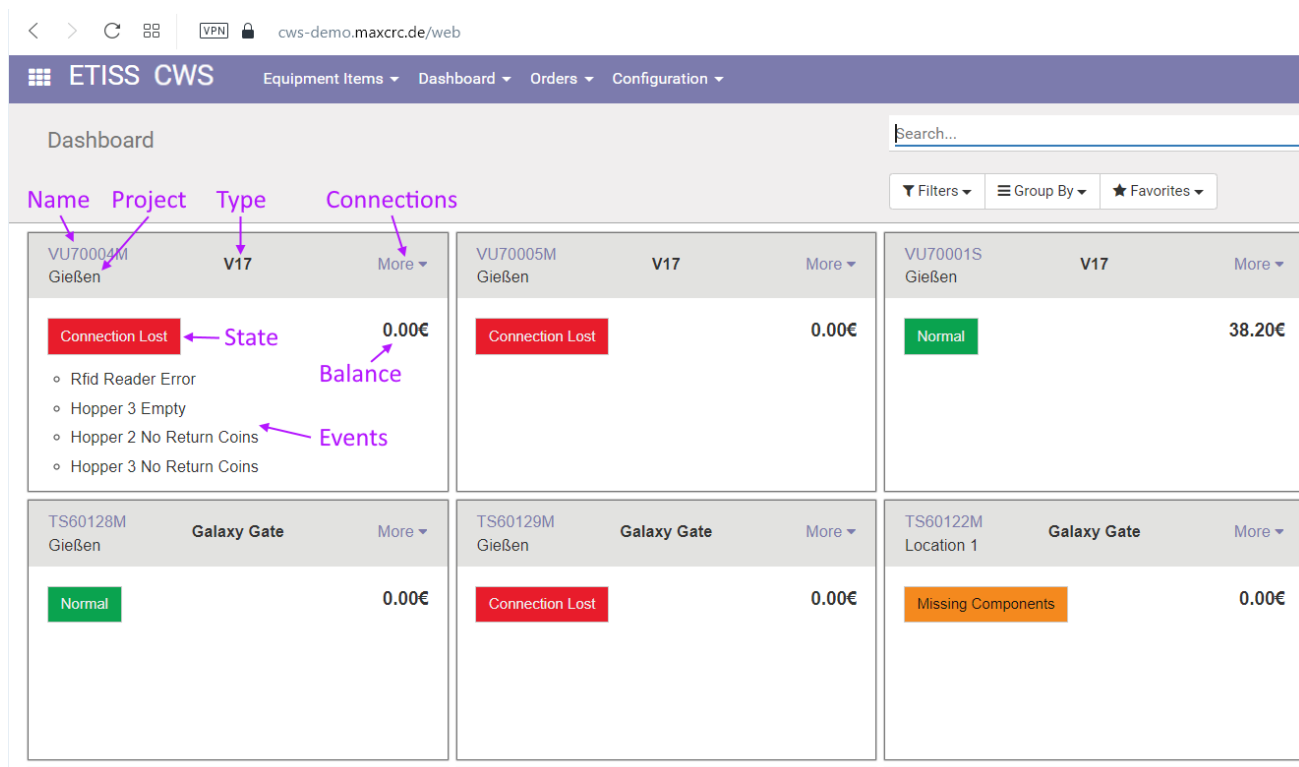


The screenshot shows the ETISS CWS dashboard with a grid of equipment items. Annotations in purple point to various fields:

- Name:** Points to the equipment name (e.g., VU70004M Gießen).
- Project:** Points to the project name (e.g., V17).
- Type:** Points to the equipment type (e.g., V17).
- Connections:** Points to the 'More' link for connecting to the device.
- State:** Points to the status indicator (e.g., 'Connection Lost' in red).
- Balance:** Points to the current amount of money (e.g., 0.00€).
- Events:** Points to the list of recent events (e.g., 'Rfid Reader Error', 'Hopper 3 Empty', etc.).


- **Name:** Equipment item name
- **Project:** A project to which this equipment item belongs
- **Type:** Equipment item type. In case of Vending Units, this can be either V21 or V7, or other modifications
- **Connections:** This link allows to quickly connect to the item either with ssh, or VNC and check the status.
- **Balance:** In case of VU, shows the current amount of money in the Vending Unit.
- **Events:** Shows the list of events that have happened recently
- **State:** Displays current state of the equipment item

VU state and events


When something happens with Vending Unit or other equipment, it sends an event to the server. You can view current status of the unit and events that happened earlier by pressing a button on the dashboard:

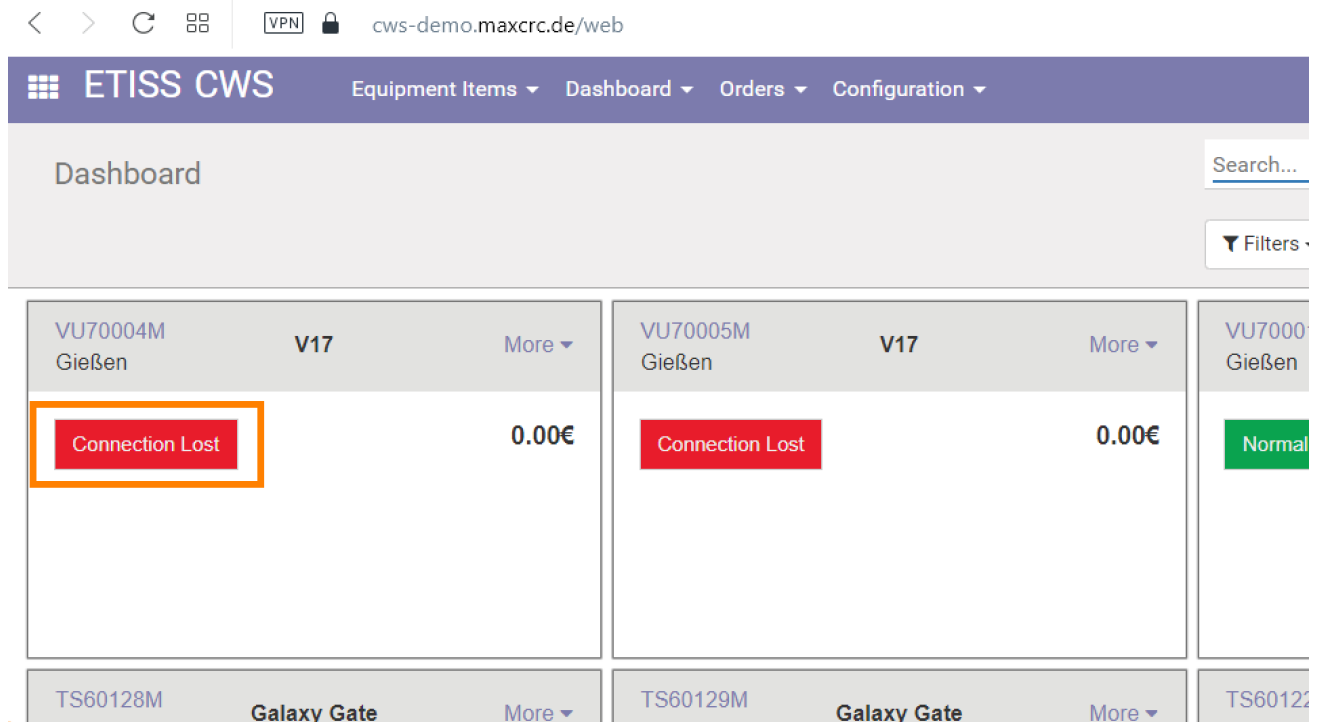

Each event in the list is color-coded and has different weight. More reddish colors have bigger weight and need to be checked immediately. You can see detailed colors description by pressing on the **Legend** button.

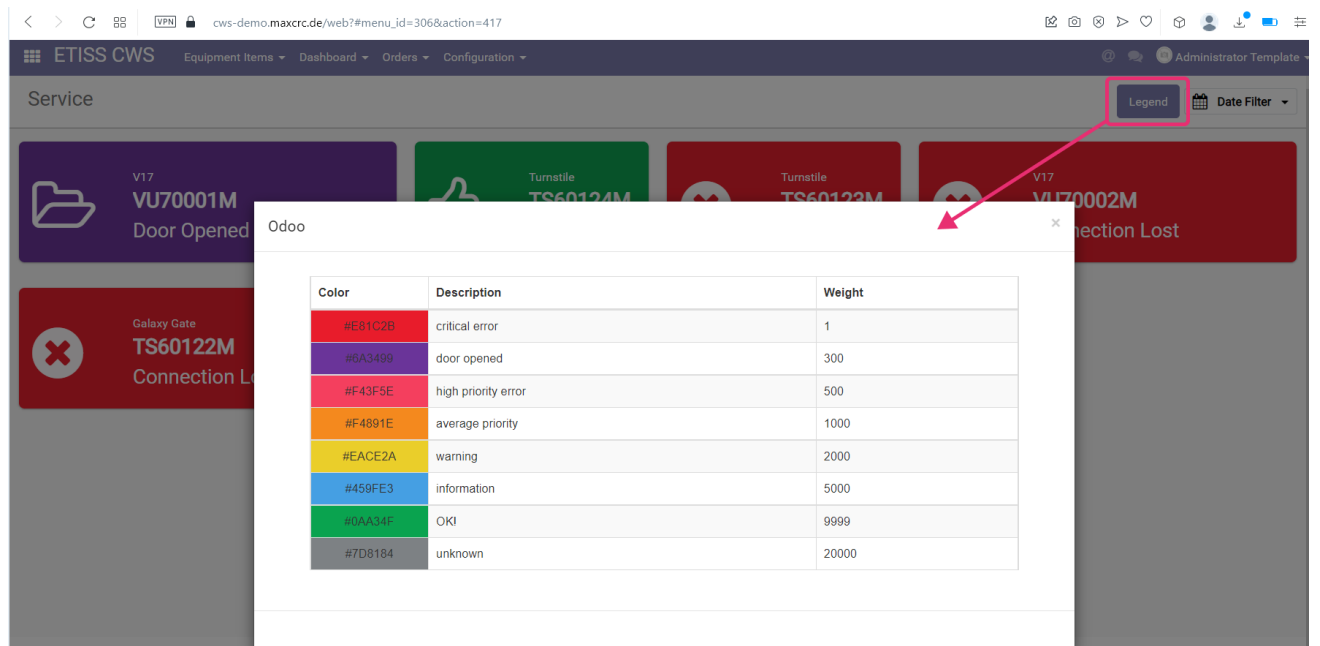

The events list can be sorted by date, weight, color, etc.

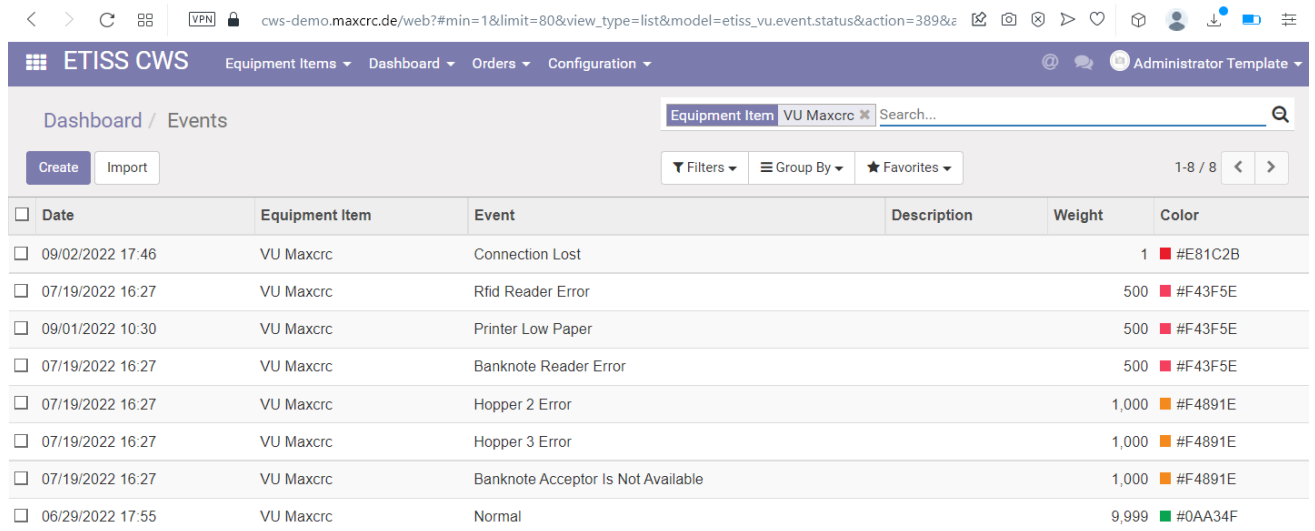

Dashboard / Events


Equipment Item VU Maxcrc Search...

Filters Group By Favorites 1-8 / 8

Date	Equipment Item	Event	Description	Weight	Color
09/02/2022 17:46	VU Maxcrc	Connection Lost		1	#E81C2B
07/19/2022 16:27	VU Maxcrc	Rfid Reader Error		500	#F43F5E
09/01/2022 10:30	VU Maxcrc	Printer Low Paper		500	#F43F5E
07/19/2022 16:27	VU Maxcrc	Banknote Reader Error		500	#F43F5E
07/19/2022 16:27	VU Maxcrc	Hopper 2 Error		1,000	#F4891E
07/19/2022 16:27	VU Maxcrc	Hopper 3 Error		1,000	#F4891E
07/19/2022 16:27	VU Maxcrc	Banknote Acceptor Is Not Available		1,000	#F4891E
06/29/2022 17:55	VU Maxcrc	Normal		9,999	#0AA34F

Muted events

Sometimes you don't want to see a particular event in the list of current events and you want to simply hide it. The ETISS ERP system allows to do that. Let's say that we know that our coin cashbox is in overflow state and we don't want to see this event in the list.

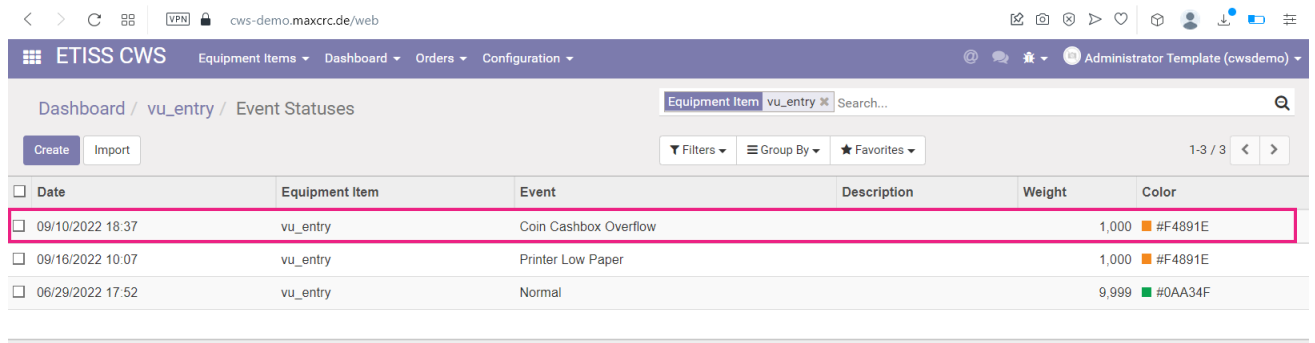


Dashboard / vu_entry / Event Statuses

Equipment Item vu_entry Search...

Filters Group By Favorites 1-3 / 3

Date	Equipment Item	Event	Description	Weight	Color
09/10/2022 18:37	vu_entry	Coin Cashbox Overflow		1,000	#F4891E
09/16/2022 10:07	vu_entry	Printer Low Paper		1,000	#F4891E
06/29/2022 17:52	vu_entry	Normal		9,999	#0AA34F

To do this, first, open the **VU - FMCU** configuration by going into: **Main menu/ETISS CWS/Configuration/Equipment items** and select a configuration that your vending unit is currently using. For example, we'll take **VU Single FMCU** configuration.

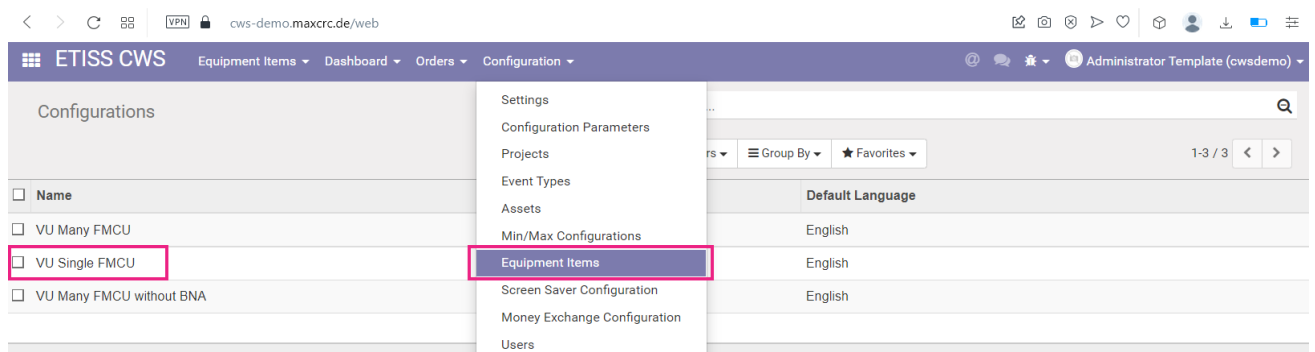


Configurations


- Settings
- Configuration Parameters
- Projects
- Event Types
- Assets
- Min/Max Configurations
- Equipment Items
- Screen Saver Configuration
- Money Exchange Configuration
- Users

Name	Default Language
VU Many FMCU	English
VU Single FMCU	English
VU Many FMCU without BNA	English


In the configuration navigate to the **Muted events** tab and add an event or a group of events that you don't want to see in the list of current events.

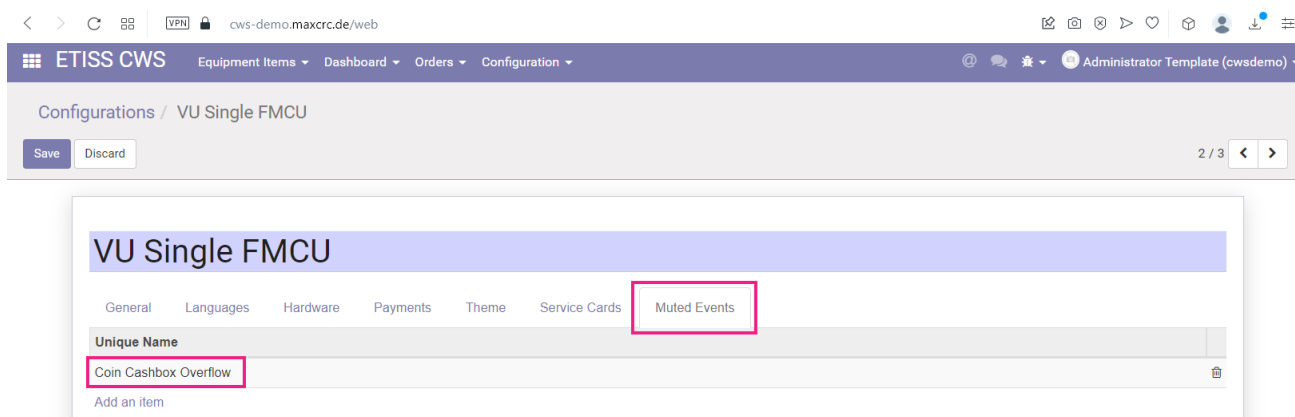

Save the configuration and reload events on the VU instance.

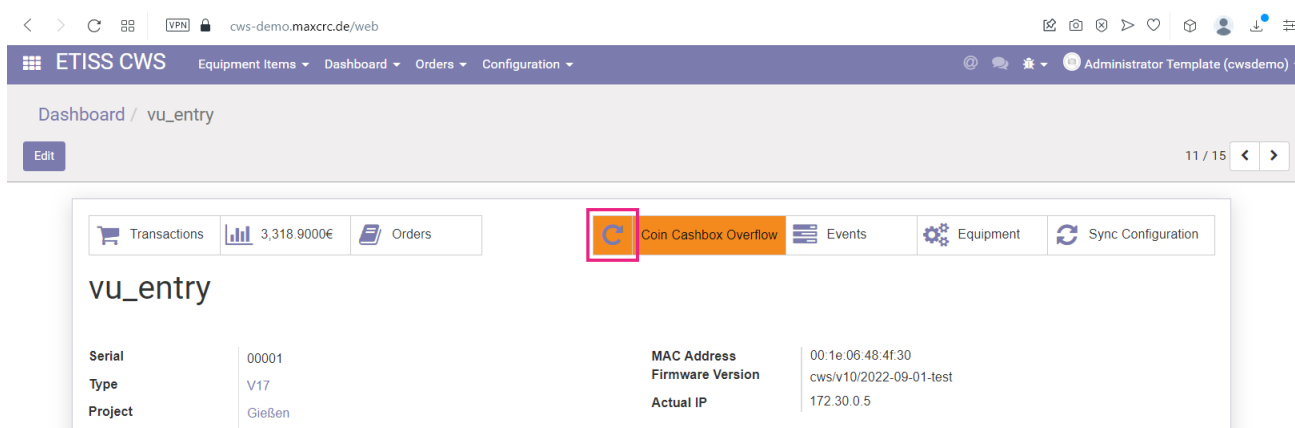


The event will disappear from the dashboard and current events list.

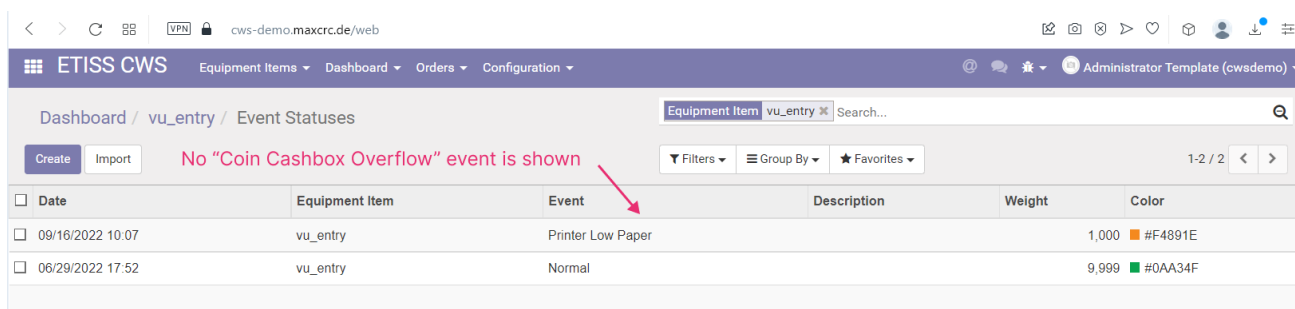

Projects


Each equipment item can belong to a certain project. You can configure projects in **Etiss CWS** -> **Configuration** -> **Projects** menu. Once you add an item to a project, you can limit visibility of the project items for certain users by assigning a user to the project. After that, each user will be able to see and work only with equipment items that belong to a certain project.

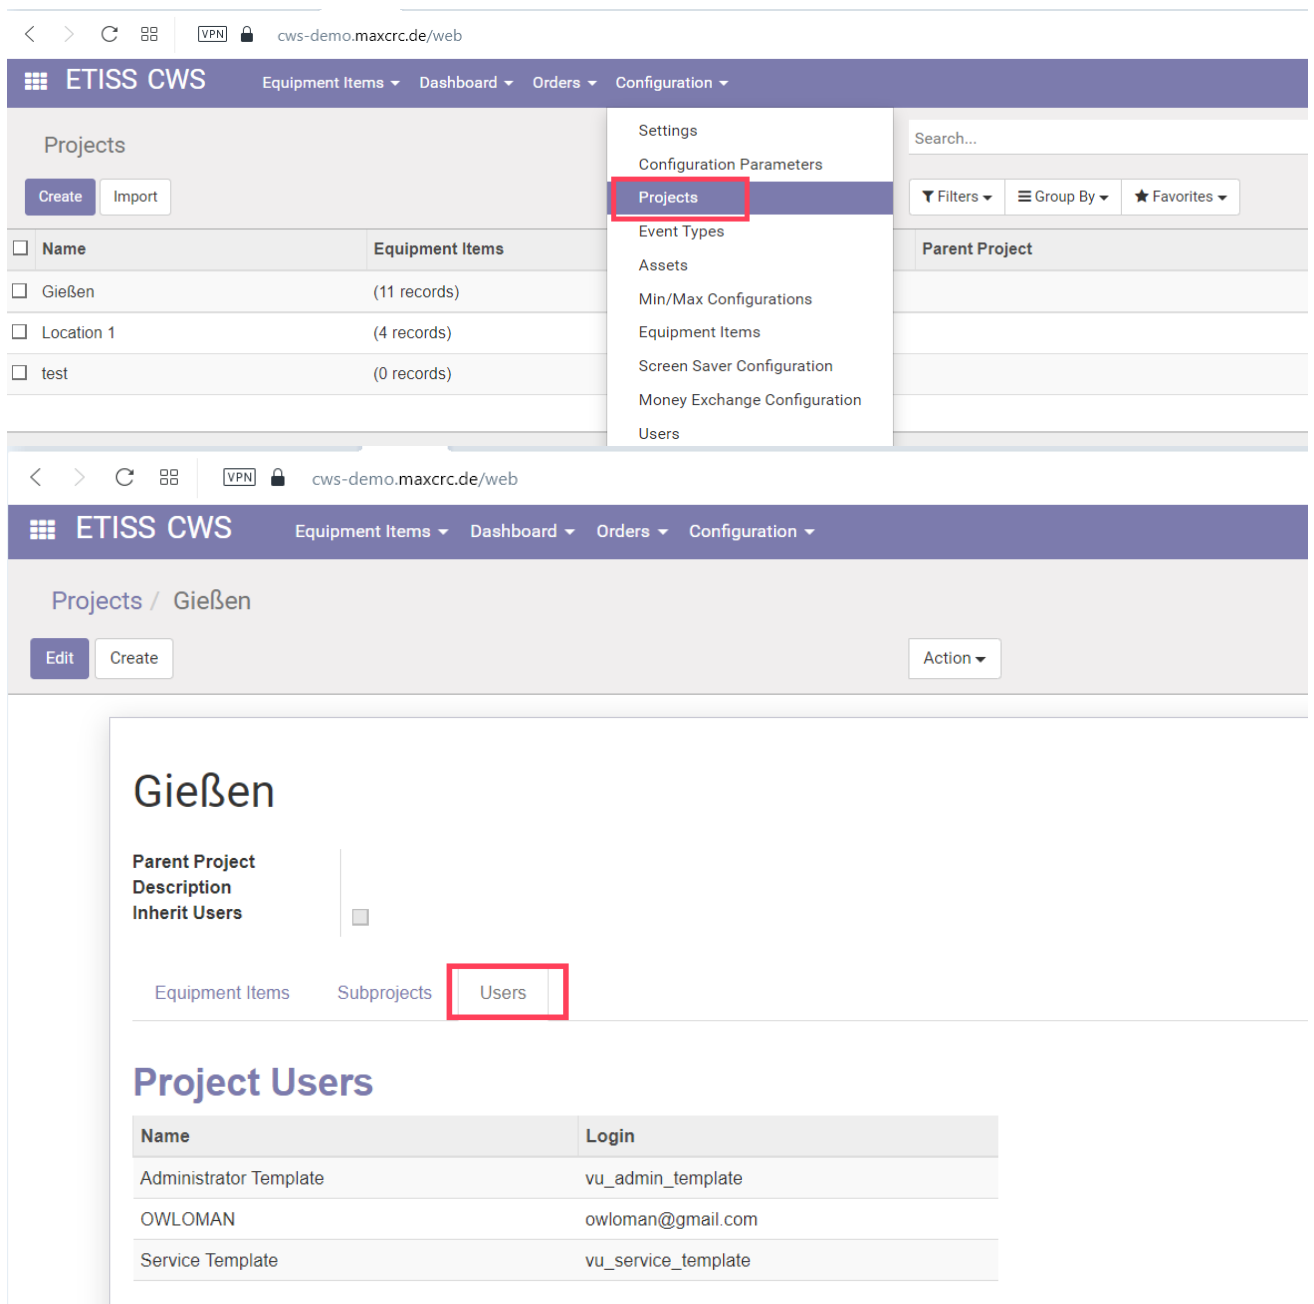

The screenshot shows the ETISS CWS web interface. The top navigation bar includes 'Equipment Items', 'Dashboard', 'Orders', and 'Configuration'. A dropdown menu is open, highlighting 'Projects'. Below the menu, a table lists projects: 'Gießen' (11 records), 'Location 1' (4 records), and 'test' (0 records). The second screenshot shows the 'Gießen' project details page, with a sub-tab 'Users' selected. The 'Project Users' table is as follows:

Name	Login
Administrator Template	vu_admin_template
OWLOMAN	owloman@gmail.com
Service Template	vu_service_template

There's also a nice ability to group equipment items by their project or type.

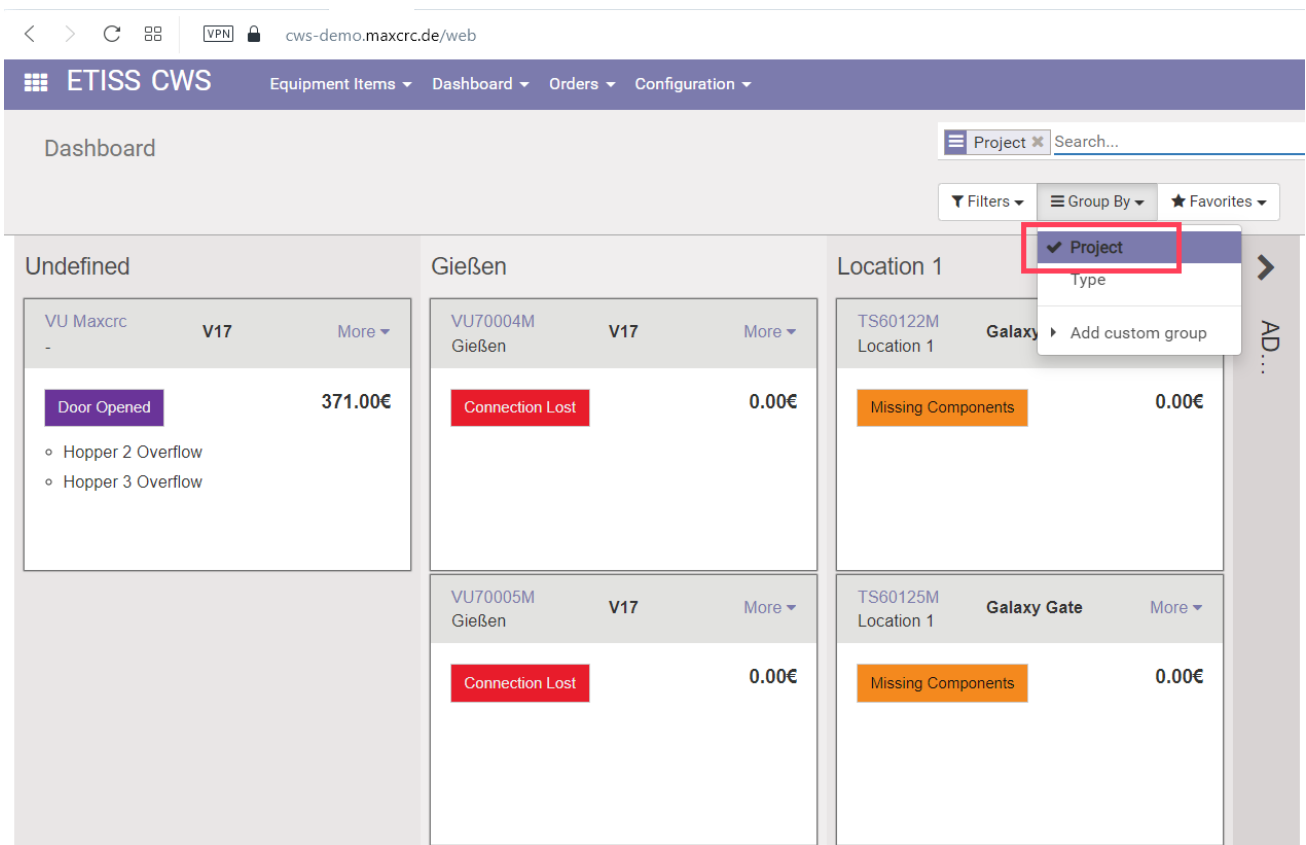

The screenshot shows the ETISS CWS dashboard with a grid of vending unit cards. A dropdown menu is open over the 'Project' column header, with 'Project' selected. The dashboard includes a search bar, filters, and group by options.

Location	Unit ID	Type	Status	Value
Undefined	VU Maxcrc	V17	Door Opened	371.00€
Gießen	VU70004M	Gießen	Connection Lost	0.00€
Gießen	VU70005M	Gießen	Connection Lost	0.00€
Location 1	TS60122M	Location 1	Missing Components	0.00€
Location 1	TS60125M	Galaxy Gate	Missing Components	0.00€


VU TABS AND PROPERTIES

When you click on Vending Unit from the dashboard, you'll see a tabbed page with its detailed properties. At first you'll see the most common properties of the VU such as:

- **Serial:** VU serial number
- **Type:** The VU type. There are number of various VU types such as V17, V21, etc.
- **Project:** Project to which this VU is assigned
- **MAC Address:** MAC address of the VU
- **Firmware version:** This shows the current firmware version of the device
- **Actual IP:** If the device has a real network IP address, it will be displayed here

Transactions button

This buttons shows all transactions that happened on the VU.

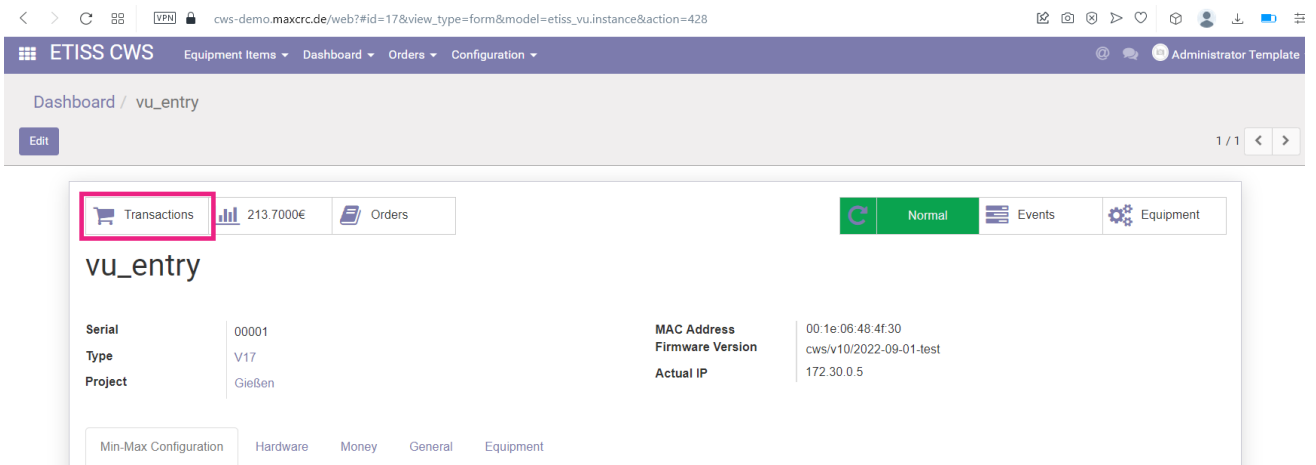


You can see here the type of transaction, related money status and other information.


Equipment Item	Date	VU Date	Transaction type	Transaction money	Discrepancy money	Begin Total Money	End Total Money	Money Status Begin ID	Money Status End ID	Info
<input type="checkbox"/> vu_entry	09/02/2022 09:42	09/02/2022 09:41	Reboot	0.00	-1,962.00	18,940.43	16,978.43	147	0	
<input type="checkbox"/> vu_entry	09/01/2022 15:22	09/01/2022 15:22	PaymentCash	0.90	0.00	18,939.53	18,940.43	129	132	
<input type="checkbox"/> vu_entry	09/01/2022 11:11	09/01/2022 11:11	Reboot	0.00	1,000.00	17,939.53	18,939.53	128	0	

Money statuses button

If you press this button, you'll be presented with the detailed information about money in the VU.

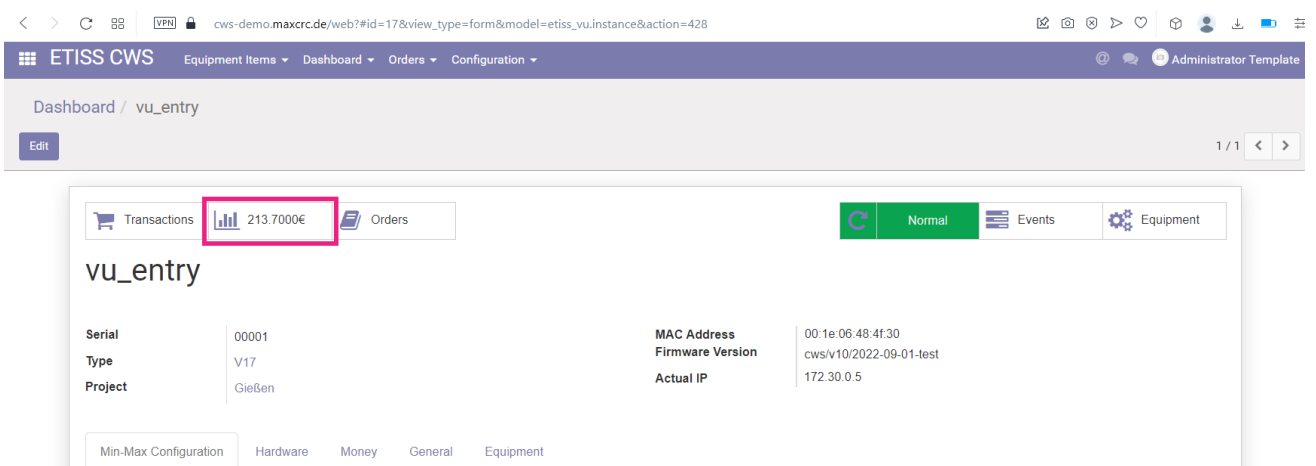

If money amount changes on VU a record is added here, so you won't miss any money-related event on this VU.

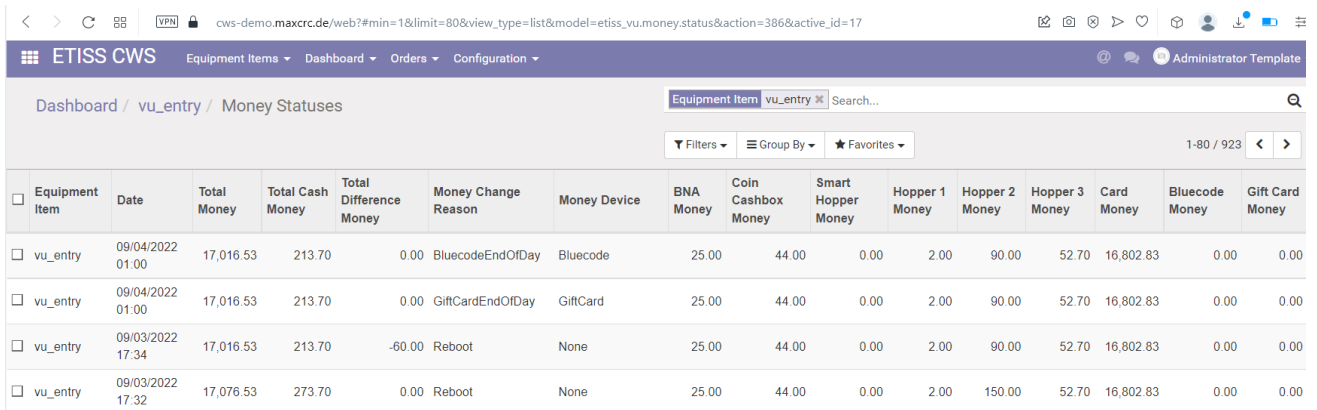


Dashboard / vu_entry / Money Statuses

Equipment Item: vu_entry

Equipment Item	Date	Total Money	Total Cash Money	Total Difference Money	Money Change Reason	Money Device	BNA Money	Coin Cashbox Money	Smart Hopper Money	Hopper 1 Money	Hopper 2 Money	Hopper 3 Money	Card Money	Bluecode Money	Gift Card Money
<input type="checkbox"/> vu_entry	09/04/2022 01:00	17,016.53	213.70	0.00	BluecodeEndOfDay	Bluecode	25.00	44.00	0.00	2.00	90.00	52.70	16,802.83	0.00	0.00
<input type="checkbox"/> vu_entry	09/04/2022 01:00	17,016.53	213.70	0.00	GiftCardEndOfDay	GiftCard	25.00	44.00	0.00	2.00	90.00	52.70	16,802.83	0.00	0.00
<input type="checkbox"/> vu_entry	09/03/2022 17:34	17,016.53	213.70	-60.00	Reboot	None	25.00	44.00	0.00	2.00	90.00	52.70	16,802.83	0.00	0.00
<input type="checkbox"/> vu_entry	09/03/2022 17:32	17,076.53	273.70	0.00	Reboot	None	25.00	44.00	0.00	2.00	150.00	52.70	16,802.83	0.00	0.00

Orders button

This button displays a table with the list of orders that were created on the VU.

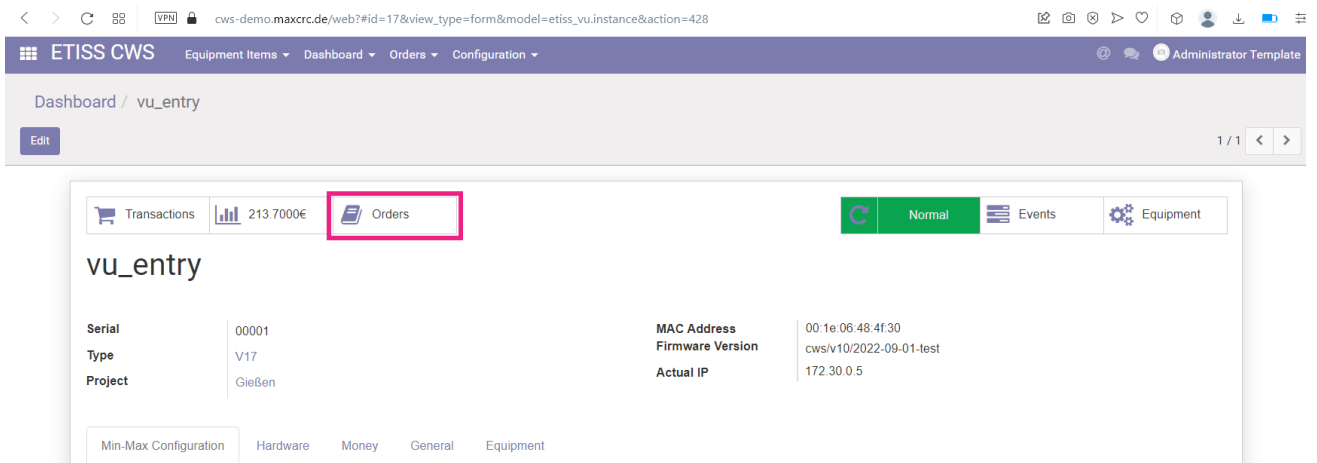

Dashboard / vu_entry


Transactions | 213.7000€ | **Orders** | Normal | Events | Equipment

vu_entry

Serial: 00001 | MAC Address: 00:1e:06:48:4f:30
 Type: V17 | Firmware Version: cws/v10/2022-09-01-test
 Project: Gießen | Actual IP: 172.30.0.5

Min-Max Configuration | Hardware | Money | General | Equipment

If you open any order here, you'll get detailed information about it such as date, amount of money paid, etc.

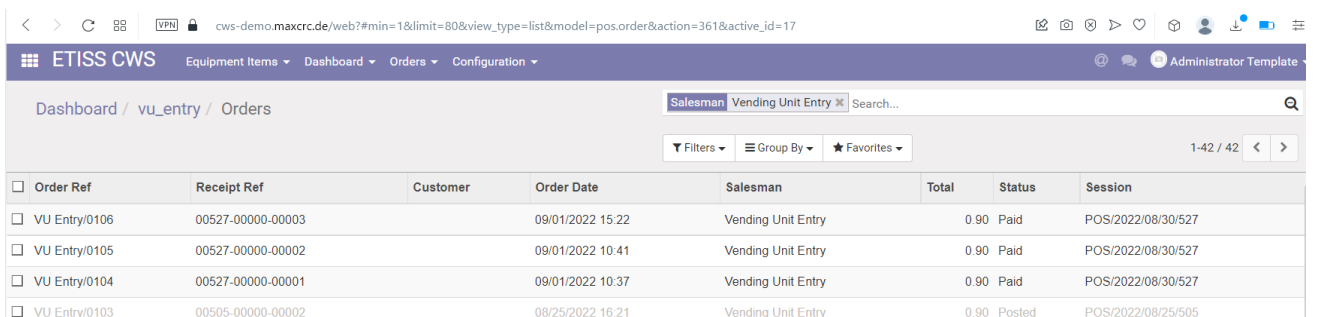


Dashboard / vu_entry / Orders

Salesman: Vending Unit Entry

Order Ref	Receipt Ref	Customer	Order Date	Salesman	Total	Status	Session
<input type="checkbox"/> VU Entry/0106	00527-00000-00003		09/01/2022 15:22	Vending Unit Entry	0.90	Paid	POS/2022/08/30/527
<input type="checkbox"/> VU Entry/0105	00527-00000-00002		09/01/2022 10:41	Vending Unit Entry	0.90	Paid	POS/2022/08/30/527
<input type="checkbox"/> VU Entry/0104	00527-00000-00001		09/01/2022 10:37	Vending Unit Entry	0.90	Paid	POS/2022/08/30/527
<input type="checkbox"/> VU Entry/0103	00505-00000-00002		08/25/2022 16:21	Vending Unit Entry	0.90	Posted	POS/2022/08/25/505


Reload events button

Sometimes a situation can occur when a Vending Unit displays wrong information about it's current state. You can press this button and the system will re-request current information about Vending Unit status and events.

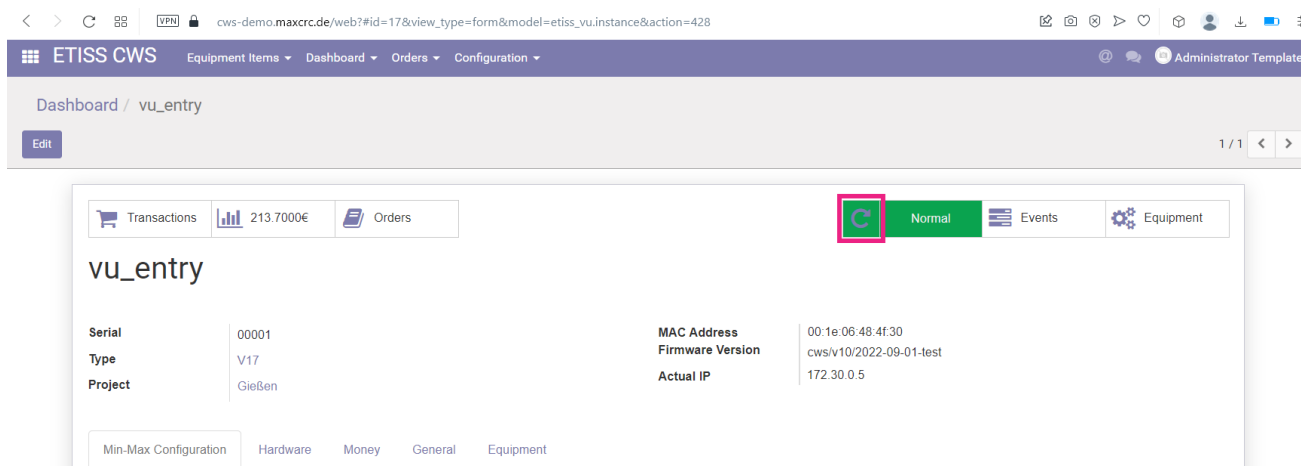


Current events button

When something happens with the VU, you'll see most significant problem displayed on this button.

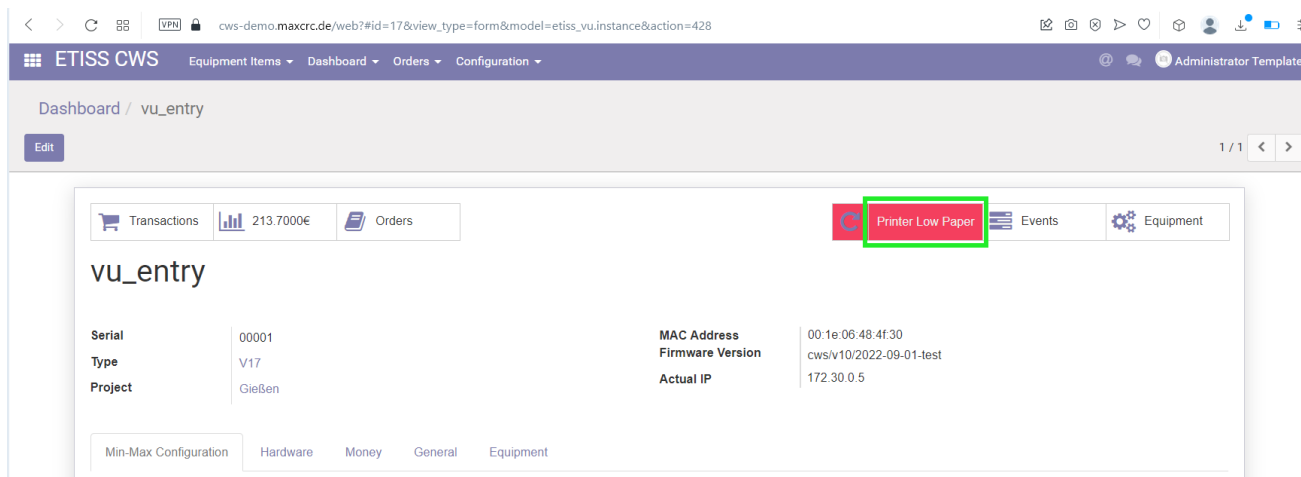


After pressing this button you'll see a list of current events that happened on the VU and they will be ordered by their weight.

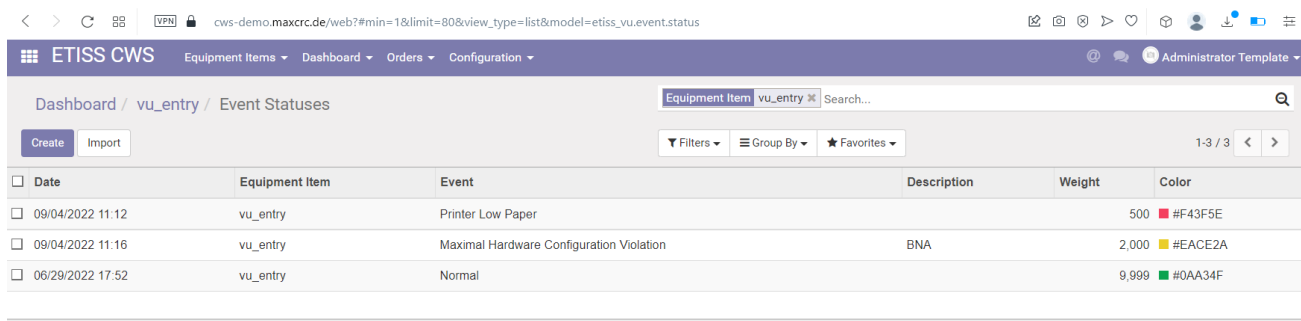

Events button

This button shows the complete history of events that happened on the particular VU.

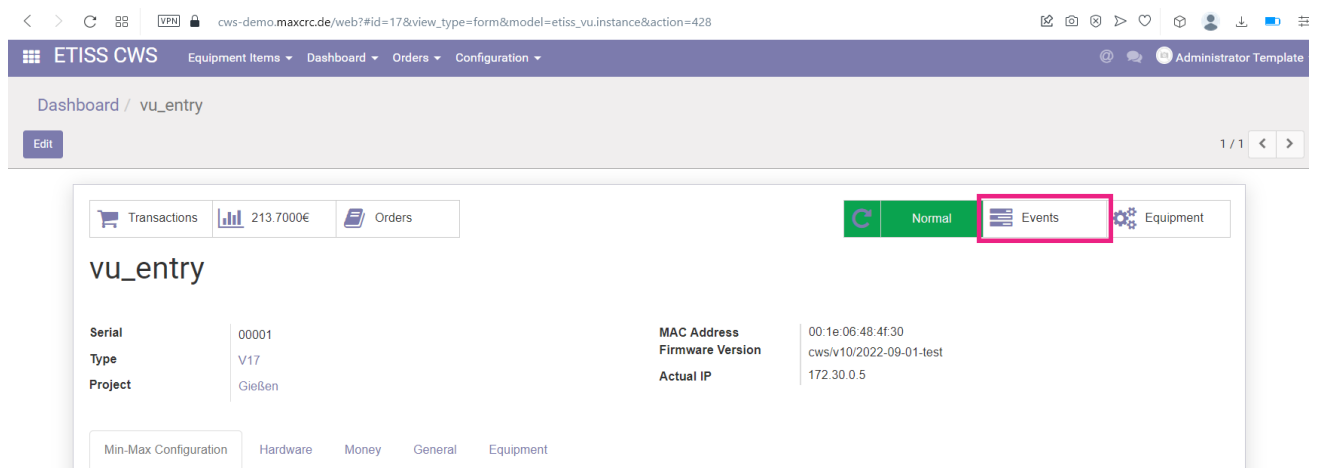

ETISS CWS Equipment Items Dashboard Orders Configuration Administrator Template

Dashboard / vu_entry

Edit 1 / 1

Transactions 213.7000€ Orders


Normal Events Equipment

vu_entry

Serial	00001	MAC Address	00:1e:06:48:4f:30
Type	V17	Firmware Version	cws/v10/2022-09-01-test
Project	Gießen	Actual IP	172.30.0.5

Min-Max Configuration Hardware Money General Equipment

If, for example, some error has a recurring character, you can find it in the list and see detailed information about it and when it happened before.

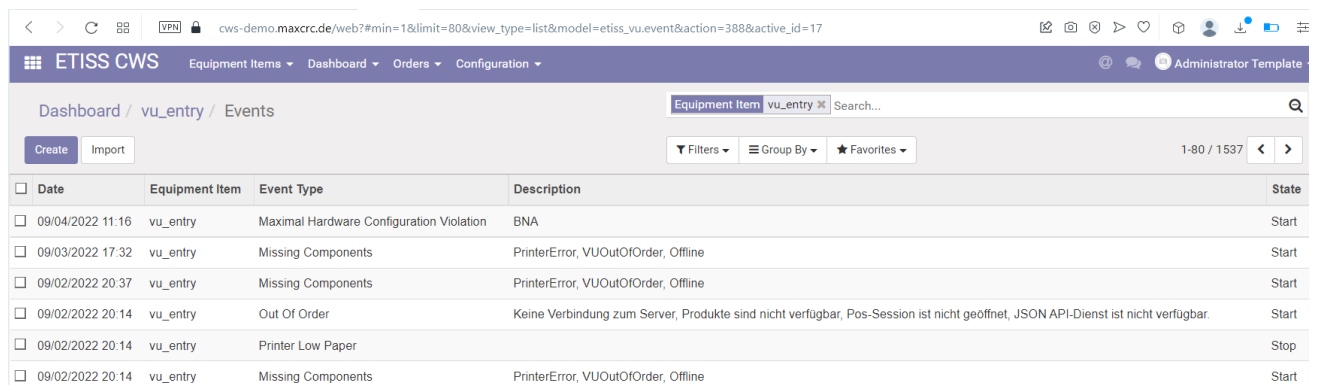

ETISS CWS Equipment Items Dashboard Orders Configuration Administrator Template

Dashboard / vu_entry / Events


Equipment Item vu_entry Search...

Create Import Filters Group By Favorites 1-80 / 1537

Date	Equipment Item	Event Type	Description	State
09/04/2022 11:16	vu_entry	Maximal Hardware Configuration Violation	BNA	Start
09/03/2022 17:32	vu_entry	Missing Components	PrinterError, VUOutOfOrder, Offline	Start
09/02/2022 20:37	vu_entry	Missing Components	PrinterError, VUOutOfOrder, Offline	Start
09/02/2022 20:14	vu_entry	Out Of Order	Keine Verbindung zum Server, Produkte sind nicht verfügbar, Pos-Session ist nicht geöffnet, JSON API-Dienst ist nicht verfügbar.	Start
09/02/2022 20:14	vu_entry	Printer Low Paper		Stop
09/02/2022 20:14	vu_entry	Missing Components	PrinterError, VUOutOfOrder, Offline	Start

Min-Max configuration tab

This tab shows the minimal, current, and maximal amount of the equipment that can be installed on VU.

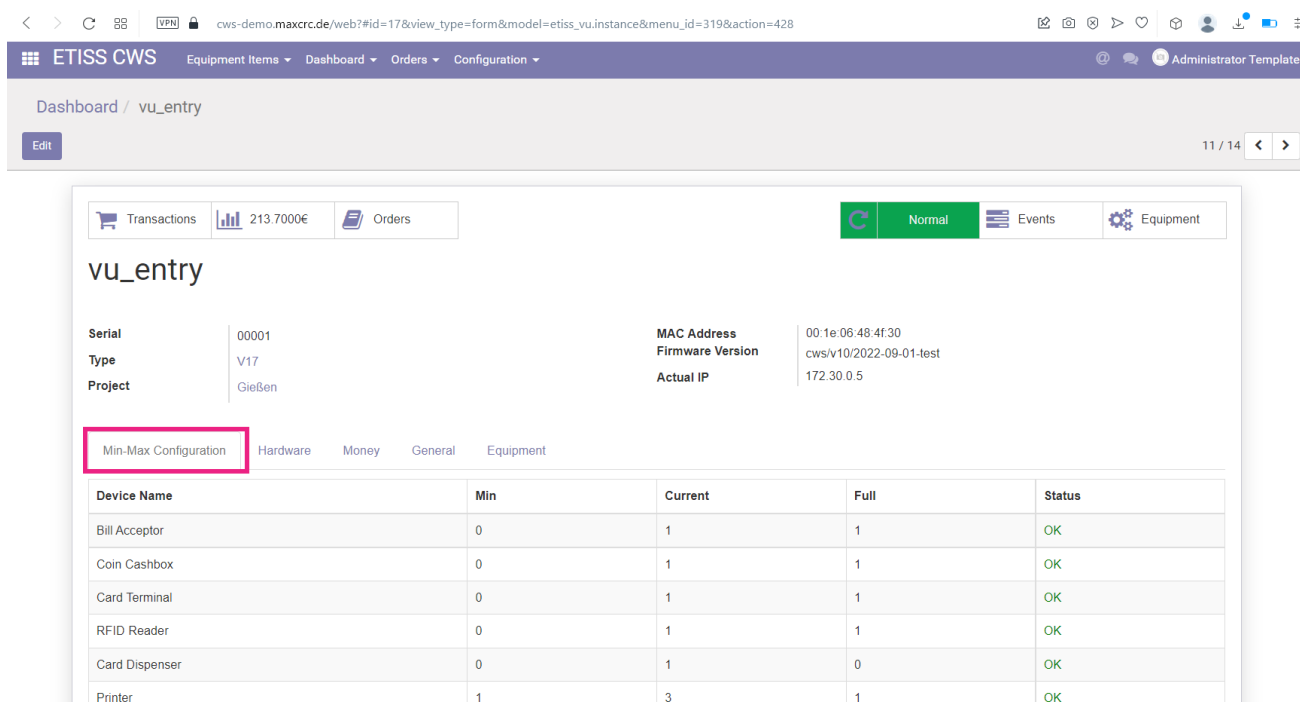

ETISS CWS Equipment Items Dashboard Orders Configuration Administrator Template

Dashboard / vu_entry

Transactions 213.7000€ Orders

Normal Events Equipment

vu_entry


Serial: 00001 MAC Address: 00:1e:06:48:4f:30
 Type: V17 Firmware Version: cws/v10/2022-09-01-test
 Project: Gießen Actual IP: 172.30.0.5

Min-Max Configuration Hardware Money General Equipment

Device Name	Min	Current	Full	Status
Bill Acceptor	0	1	1	OK
Coin Cashbox	0	1	1	OK
Card Terminal	0	1	1	OK
RFID Reader	0	1	1	OK
Card Dispenser	0	1	0	OK
Printer	1	3	1	OK

Each line represents a group of devices. For example, line **Hopper - | 1 | 3 | 3 |** says that in order to operate properly, this system needs minimum 1 hopper installed. Currently it has 3 hoppers and the maximum amount of hoppers it supports - 3. To the right you can also see a column which shows the current state of the device.

Hardware tab

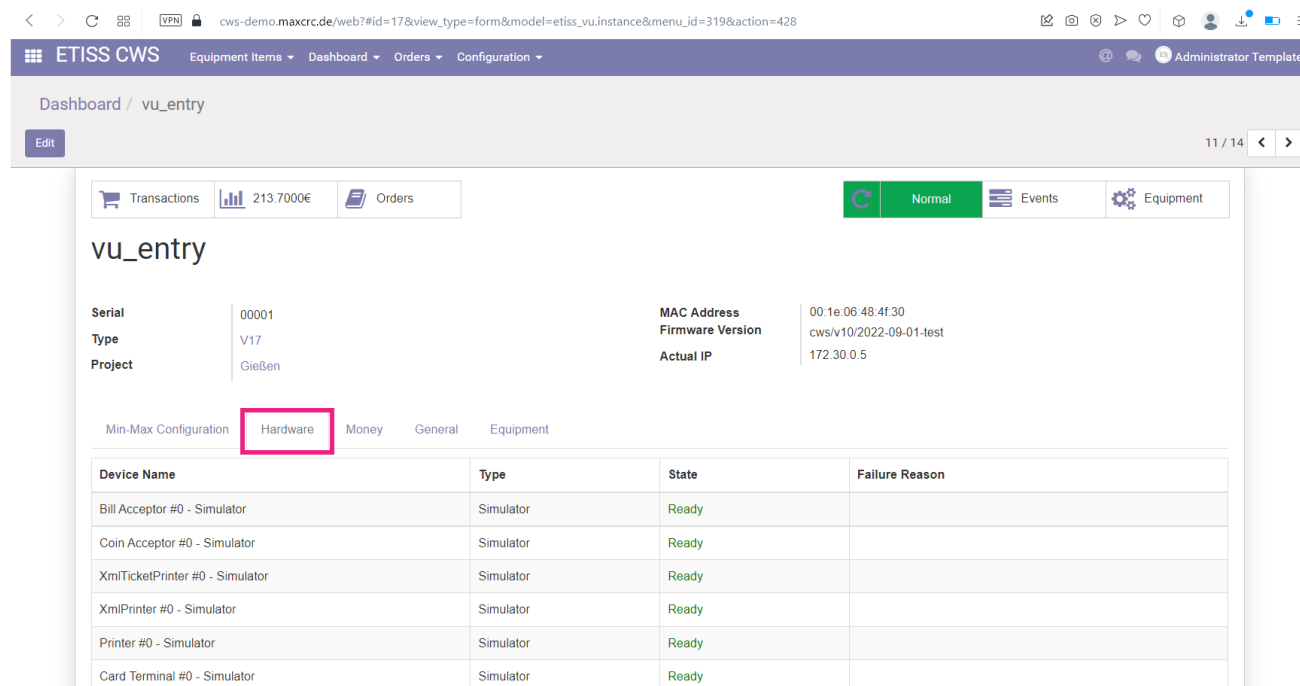

ETISS CWS Equipment Items Dashboard Orders Configuration Administrator Template

Dashboard / vu_entry

Transactions 213.7000€ Orders

Normal Events Equipment

vu_entry


Serial: 00001 MAC Address: 00:1e:06:48:4f:30
 Type: V17 Firmware Version: cws/v10/2022-09-01-test
 Project: Gießen Actual IP: 172.30.0.5

Min-Max Configuration Hardware Money General Equipment

Device Name	Type	State	Failure Reason
Bill Acceptor #0 - Simulator	Simulator	Ready	
Coin Acceptor #0 - Simulator	Simulator	Ready	
XmTicketPrinter #0 - Simulator	Simulator	Ready	
XmPrinter #0 - Simulator	Simulator	Ready	
Printer #0 - Simulator	Simulator	Ready	
Card Terminal #0 - Simulator	Simulator	Ready	


This tab shows the list of available hardware devices each on a separate line. Here you can see whether the given device is a simulator or a real device, state of each device and failure reason in case something happens with it.

Money tab

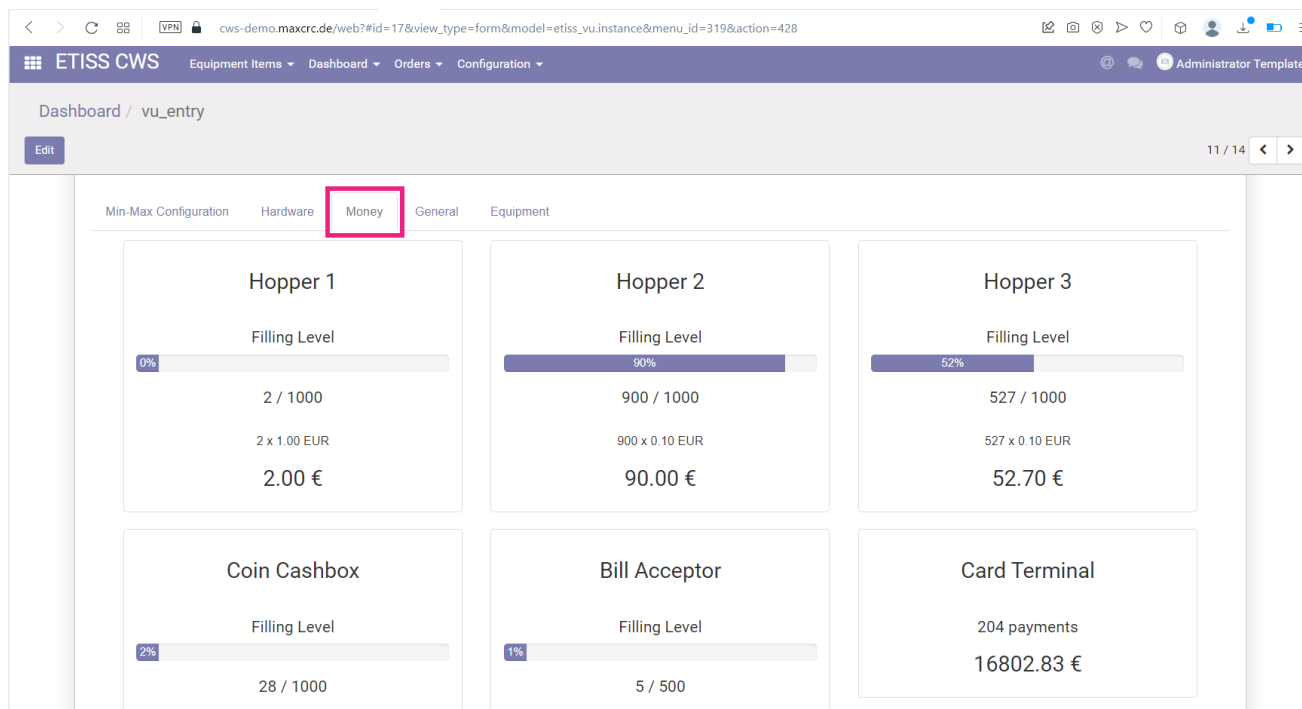

On this tab you can see the state of money devices that deal with money directly, such as Hoppers, Coin Cashboxes, Bill Acceptors, Card Terminal. Each box represents a device. Here you can monitor filling levels, limits, and money denominations that are accepted by each device. From this tab you can't change anything, just see the current state of each device.

General tab

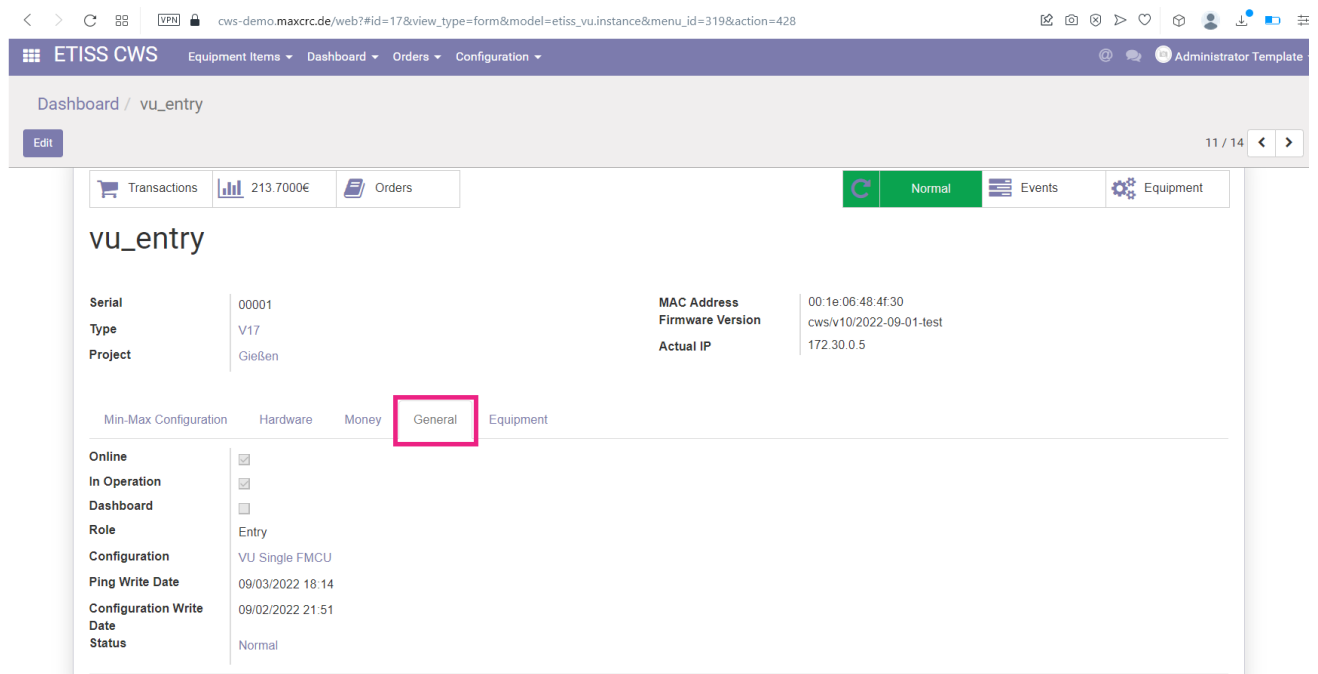

The screenshot shows the ETISS CWS web interface. The browser address bar displays the URL: `cws-demo.maxcrc.de/web?id=17&view_type=form&model=etiss_vu.instance&menu_id=319&action=428`. The page title is "ETISS CWS" and the breadcrumb is "Dashboard / vu_entry". The main content area is titled "vu_entry" and contains a table of fields:

Serial	00001	MAC Address	00:1e:06:48:4f:30
Type	V17	Firmware Version	cws/v10/2022-09-01-test
Project	Gießen	Actual IP	172.30.0.5


Below this table, there are tabs for "Min-Max Configuration", "Hardware", "Money", "General" (highlighted with a red box), and "Equipment". The "General" tab is active and shows the following fields:

Online	<input checked="" type="checkbox"/>
In Operation	<input checked="" type="checkbox"/>
Dashboard	<input type="checkbox"/>
Role	Entry
Configuration	VU Single FMCU
Ping Write Date	09/03/2022 18:14
Configuration Write Date	09/02/2022 21:51
Status	Normal

On this tab you can see general information about the given Vending Unit such as:

- **Online:** Current network status of the VU (Online/Offline)
- **In Operation:** Currently this parameter is not user. Left here for compatibility
- **Dashboard:** If checked, creates a dashboard when VU is created
- **Role:** This determines whether this vending unit is located at an entrance or exit respectively (Entry/Exit)
- **Configuration:** A VU configuration
- **Ping Write Date:** The last time when VU sent ping to the Odoo server
- **Configuration Write Date:** The last time when VU configuration has been changed
- **Status:** Current status of the VU

Equipment tab

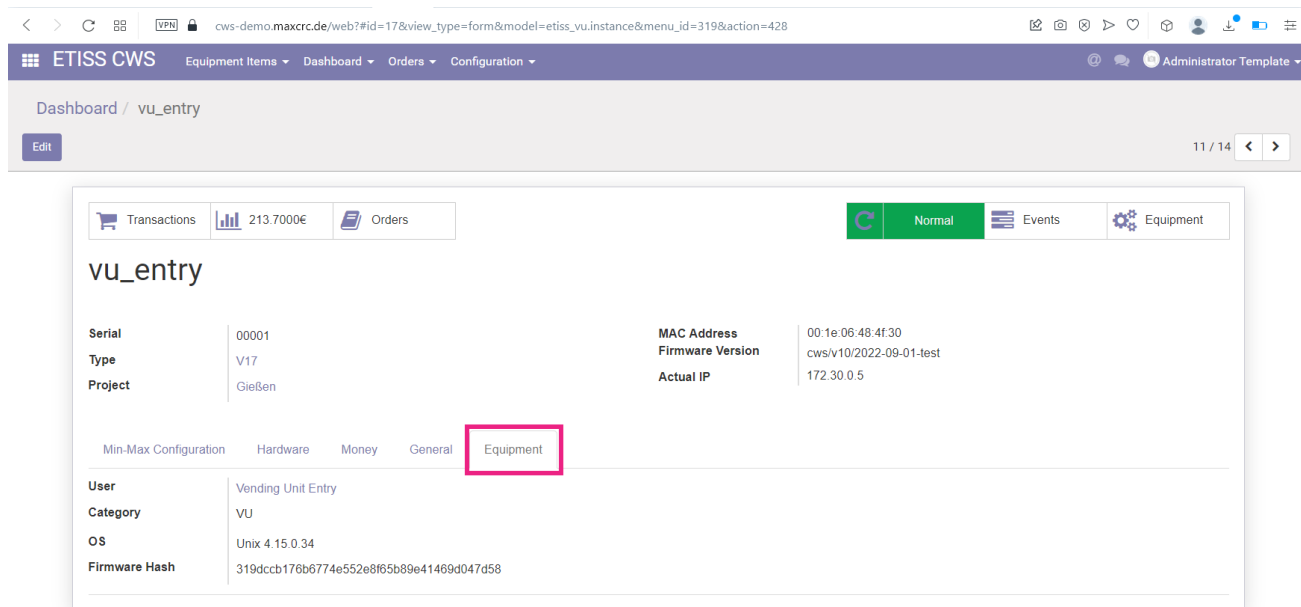


This tab shows equipment-related information such as:


- **User:** A related user that is used for VU authentication
- **Category:** The device category. Can be a VU or a Turnstile
- **OS:** Operation System of the device
- **Firmware Hash:** The hash of the software version that is currently installed on the device

FMCU TABS AND PROPERTIES

Unlike VU, FMCU has different set of tabs and additional button. They're typically named as **TS...** which means (turnstile).

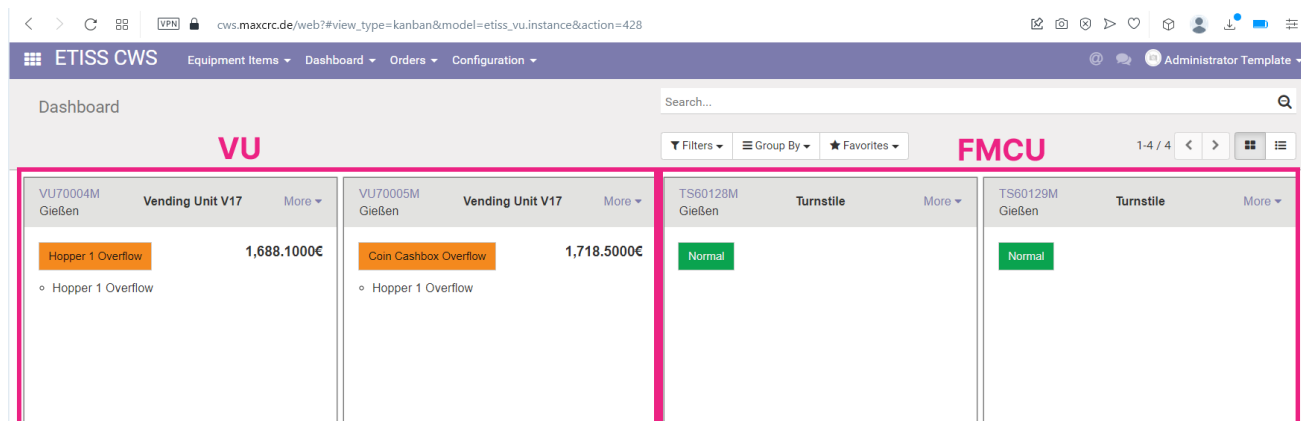

When you click on FMCU from the dashboard, you'll see a tabbed page with it's detailed properties. At first you'll see the most common properties of the VU such as:

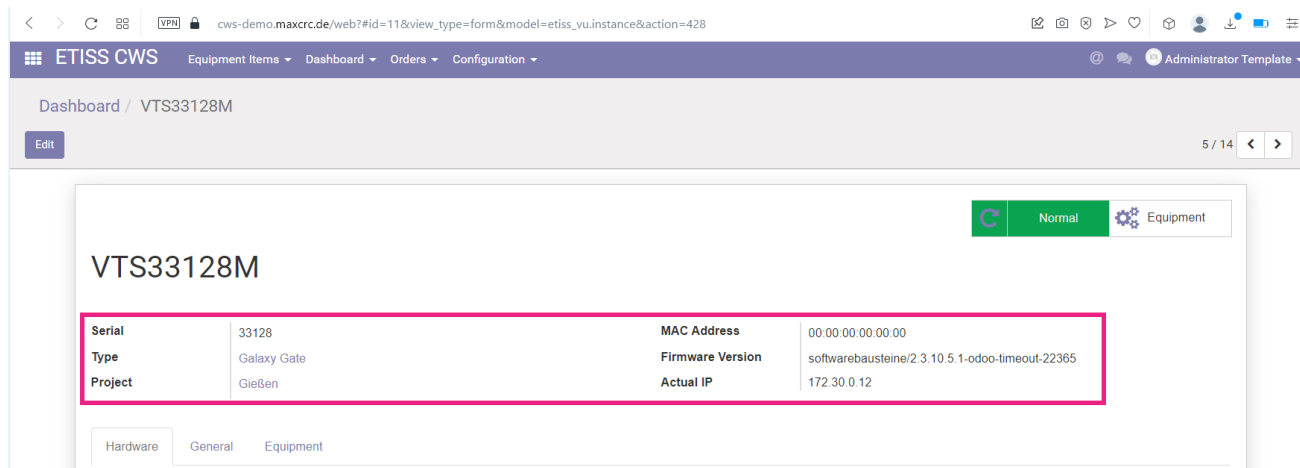


- **Serial:** FMCU serial number
- **Type:** The FMCU type. There are number of various FMCU types such as Turnstile...
- **Project:** Project to which this FMCU is assigned
- **MAC Address:** MAC address of the FMCU
- **Firmware version:** This shows the current firmware version of the device
- **Actual IP:** If the device has a real network IP address, it will be displayed here

When you open FMCU properties, you'll notice that it has less tabs than VU. It has only the following tabs: **Hardware**, **General** and **Equipment**. Below is a description of each of these tabs.


Hardware FMCU tab

This tab lists hardware devices that are installed on the FMCU. Here you can see whether the given device is a simulator or a real device, state of each device and failure reason in case something happens with it.

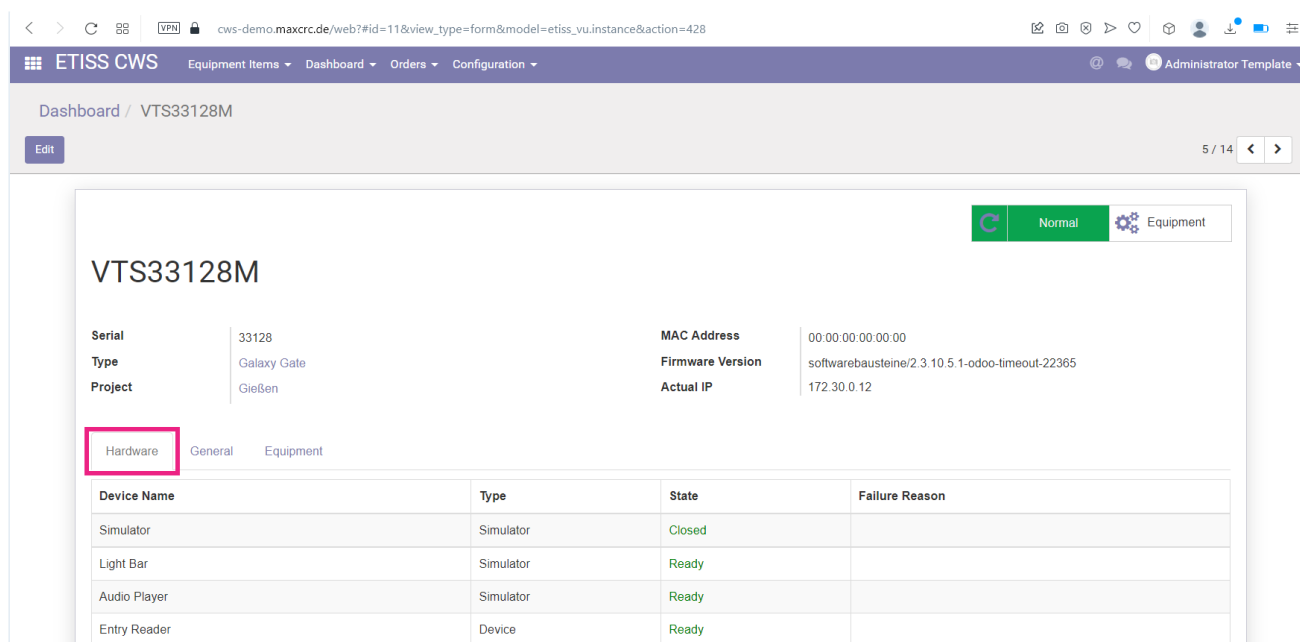

General FMCU tab

On this tab, same as on VU's tab you can see general device parameters such as **Status** and **Ping write date**.

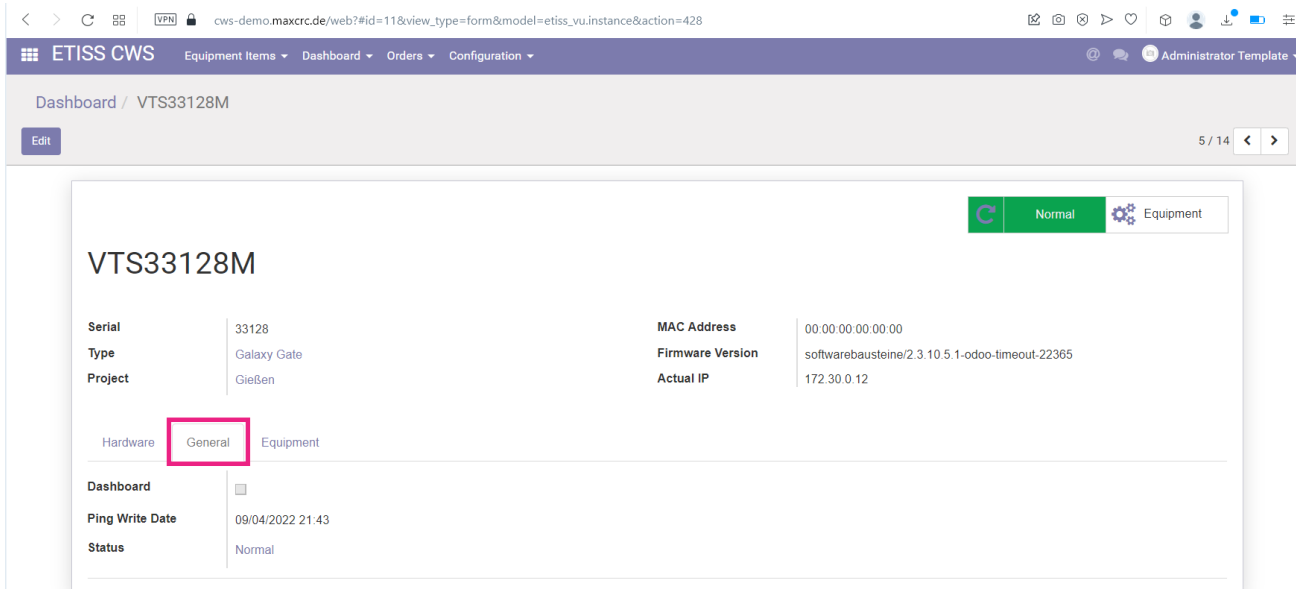

Dashboard / VTS33128M

5 / 14

VTS33128M

Normal Equipment


Serial	33128	MAC Address	00:00:00:00:00:00
Type	Galaxy Gate	Firmware Version	softwarebausteine/2.3.10.5.1-odoo-timeout-22365
Project	Gießen	Actual IP	172.30.0.12

Hardware **General** Equipment

Dashboard	<input type="checkbox"/>
Ping Write Date	09/04/2022 21:43
Status	Normal

- **Dashboard:** If checked, creates a dashboard when FMCU is created
- **Status:** Current status of the FMCU
- **Ping write date:** The last time when FMCU sent ping to the Odoo server

Equipment FMCU tab

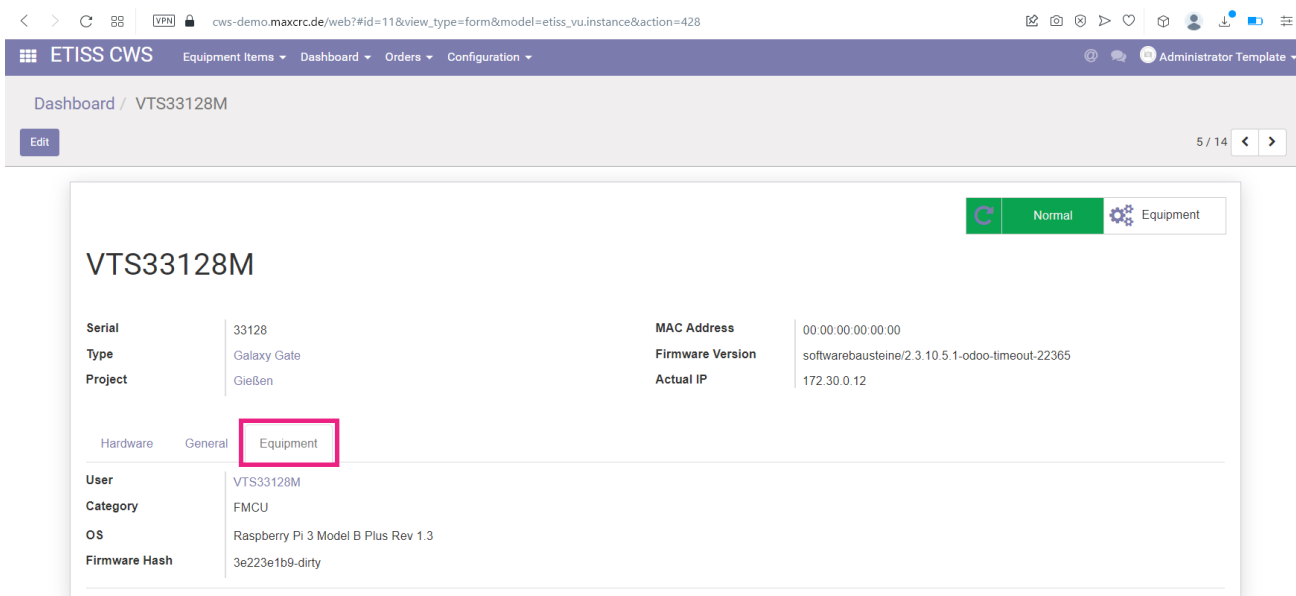

Dashboard / VTS33128M

5 / 14

VTS33128M

Normal Equipment

Serial	33128	MAC Address	00:00:00:00:00:00
Type	Galaxy Gate	Firmware Version	softwarebausteine/2.3.10.5.1-odoo-timeout-22365
Project	Gießen	Actual IP	172.30.0.12

Hardware General **Equipment**


User	VTS33128M
Category	FMCU
OS	Raspberry Pi 3 Model B Plus Rev 1.3
Firmware Hash	3e223e1b9-dirty

This tab shows equipment-related information of FMCU such as:


- **User:** A related user that is used for FMCU authentication
- **Category:** The device category. Can be a VU or a FMCU
- **OS:** Operation System of the device
- **Firmware hash:** The hash of the software version that is currently installed on the device

Equipment FMCU button

To work with the device remotely you can press **Equipment** button.

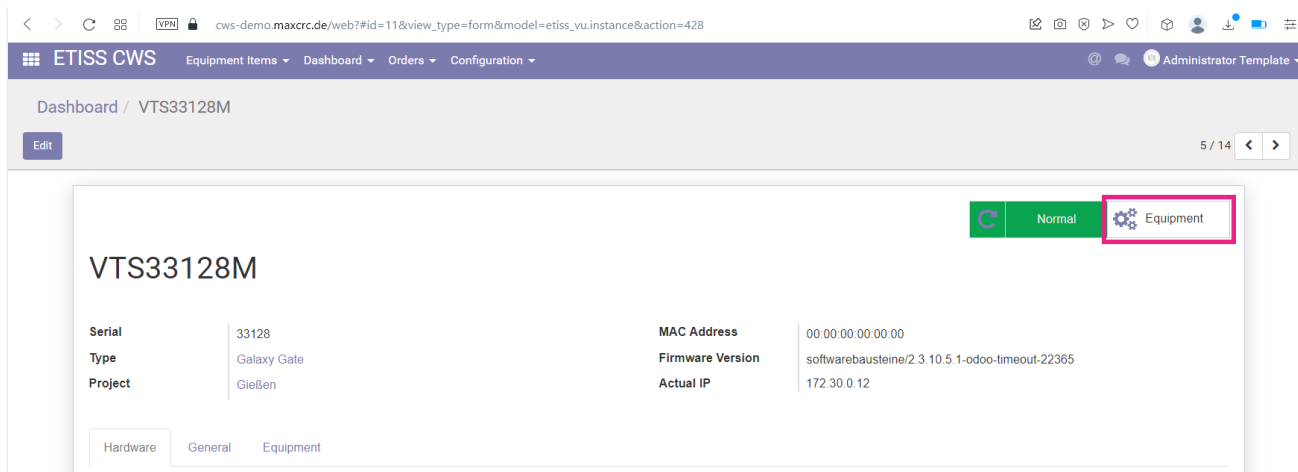

This button has all basic functionality as for VU, but additionally it has a **Web** button.

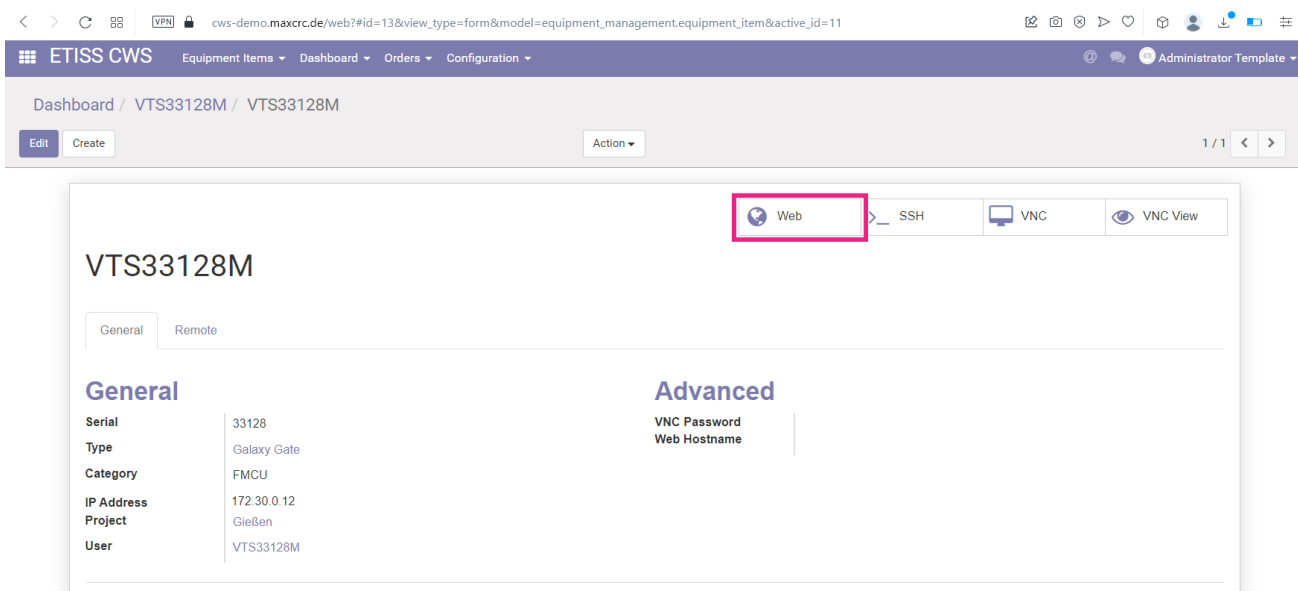


Pressing it will lead you to the login dialog to the FMCU software backend, where you'll be able to set and monitor various aspects of the FMCU software.




REMOTE MONITORING AND CONTROL

There's a possibility to remotely monitor and access Vending Units listed on dashboard. You can connect to a particular unit via SSH, View or remotely control it with VNC. To do this, click on a Vending Unit and press **Equipment** button at the right side of the screen.

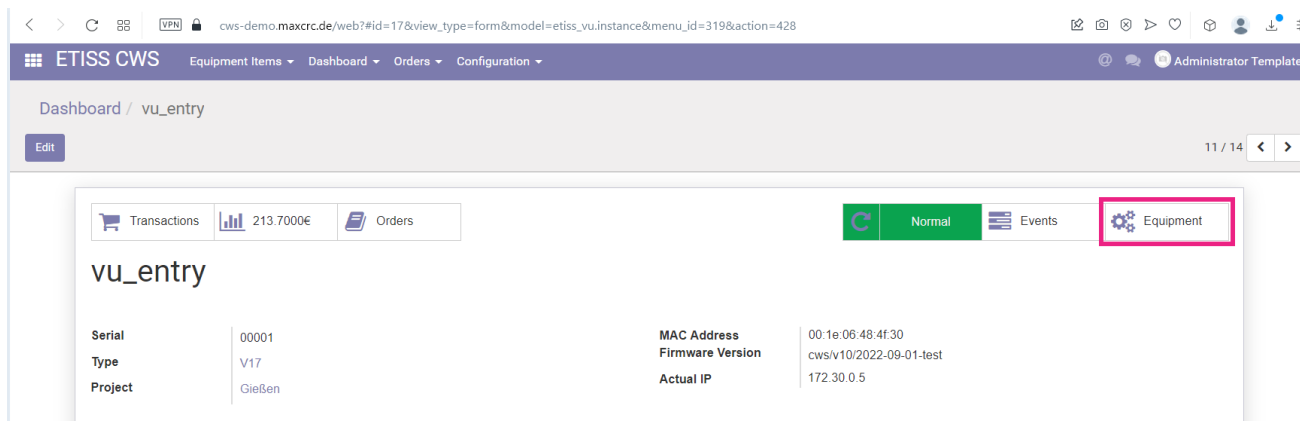

SSH

SSH button allows you to connect to particular Vending Unit using SSH protocol.

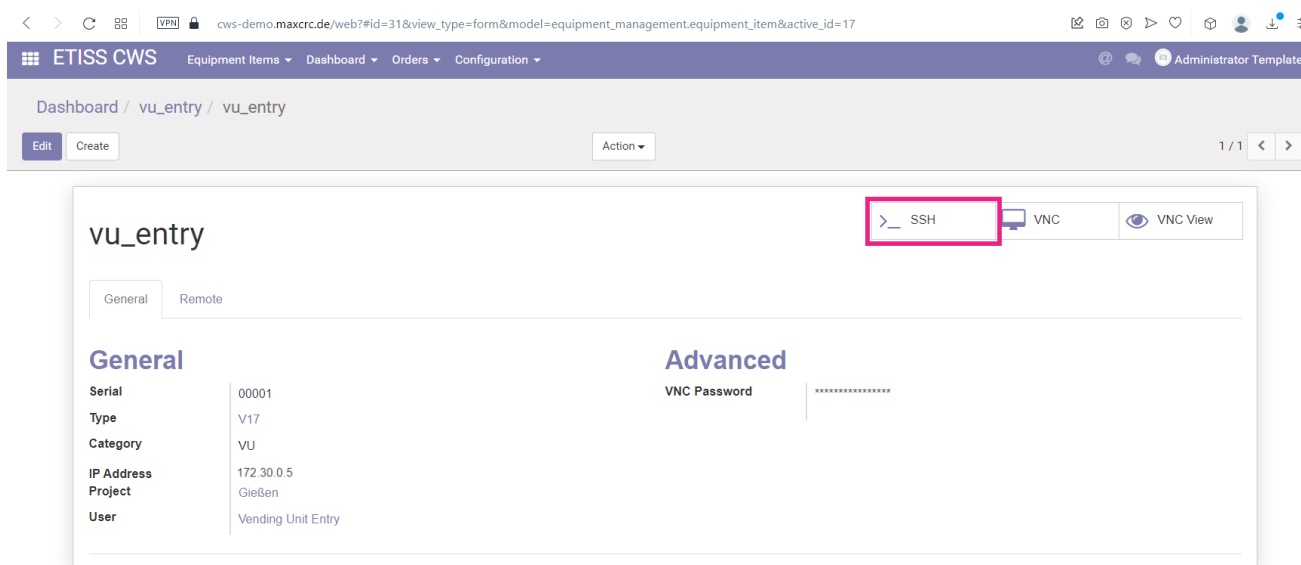


After you press this button, you'll need to enter the following parameters and press **Connect**:

- **Hostname:** IP address or domain name of the Vending Unit to which you're connecting
- **Port:** SSH port
- **Username:** A user that's used for SSH connections
- **Password:** User's password


Hostname	Port
<input type="text" value="172.30.0.6"/>	<input type="text" value="22"/>
Username	Password
<input type="text" value="root"/>	<input type="password" value="..."/>
<input type="button" value="Connect"/>	<input type="button" value="Reset"/>

When connection is successfully established, you'll be securely logged in to the Vending Unit via command line.

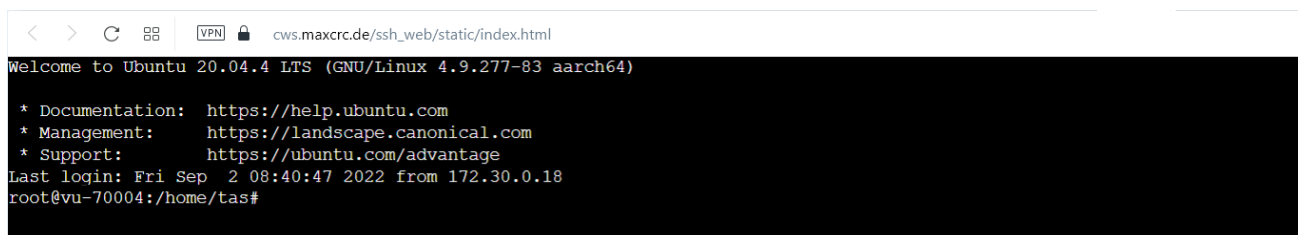


VNC

VNC button allows you to view and control the Vending Unit's screen via VNC protocol interactively. It allows to simulate buttons press, navigation and other aspects of the software.

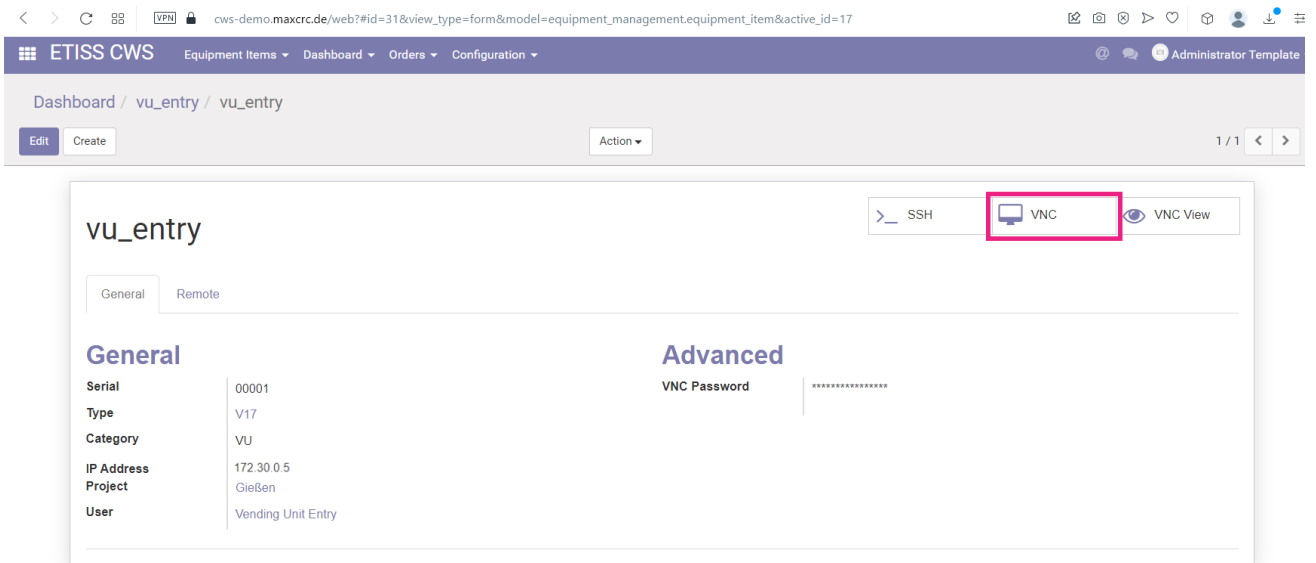


To do this, typically you don't need to enter any additional data. Just press the button and you'll see VU's screen in a separate browser tab. After that you can perform necessary operations.

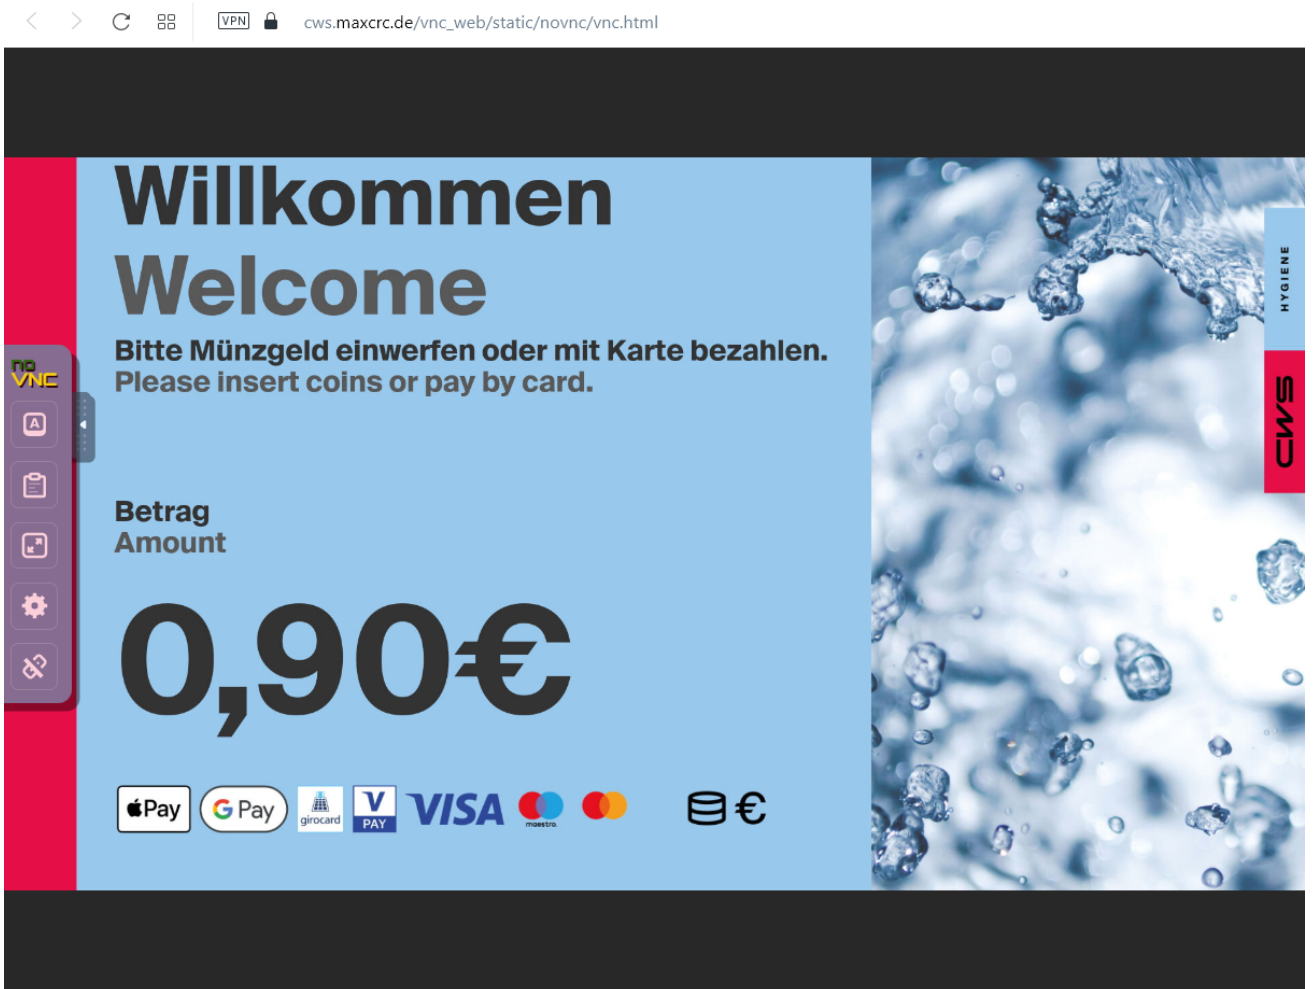


VNC View

This is basically the same as VNC only in view-only mode. You won't be able to simulate navigation or press any buttons. Use this if you want to safely observe what's happening on the VU's screen.

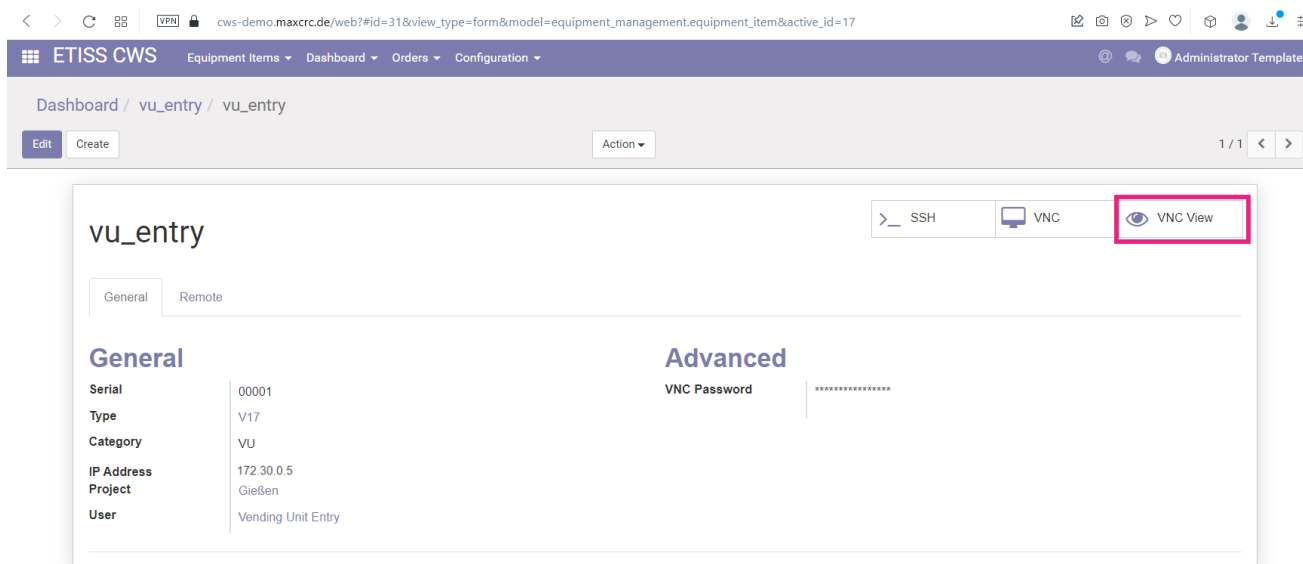

Remote tab

On this tab you can control which remote control buttons are displayed on the VU instance block.

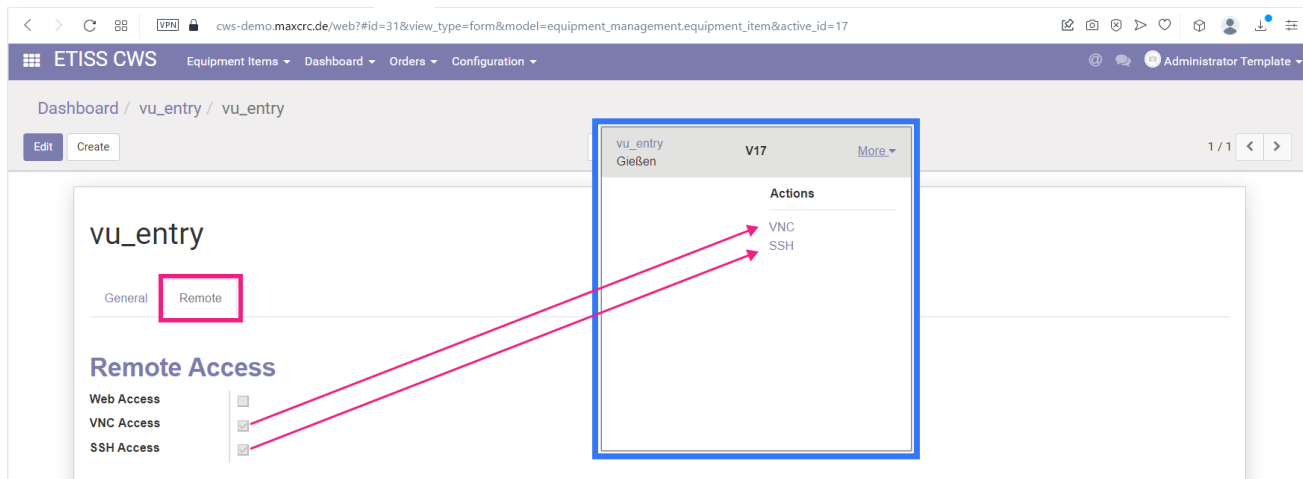

USER MANAGEMENT


Available access levels

The system has 3 access levels:

- **Cashier - vu_cashier_template:** Works with money, has limited access to other functions of the system.
- **Service - vu_service_template:** Maintains the equipment and can control its various aspects.

- **Administrator - vu_admin_template:** Has admin privileges and address to all functions of Etiss CWS system.

To login into the system using any of these roles, open the login page, enter desired user login (email), enter password and click **Login**.

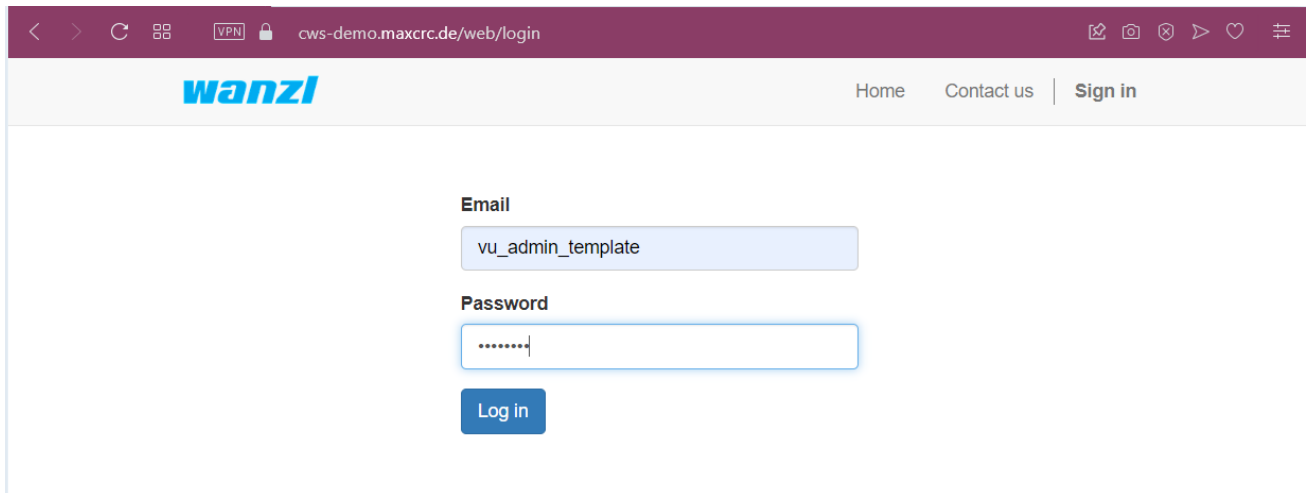


The screenshot shows a web browser window with the URL `cws-demo.maxcrc.de/web/login`. The page features the **wanzl** logo in the top left and navigation links for [Home](#), [Contact us](#), and [Sign in](#) in the top right. The main content area contains a login form with the following elements:

- Email:** A text input field containing the value `vu_admin_template`.
- Password:** A password input field with masked characters (dots).
- Log in:** A blue button labeled "Log in".

Creating a new user


To create a new user navigate to **Etiss CWS -> Configuration -> Partner registration** menu and fill in following fields:

- **Name:** User's name
- **Login:** A login which is going to be user to log in to the system.
- **Password:** User's password
- **Template:** Access level template (**Cashier template** - only works with money, **Service template** - takes care of the Units, **Administrator template** - Local GOD.)
- **Project:** User will see and be able to work only with equipment items that belong to selected here projects.

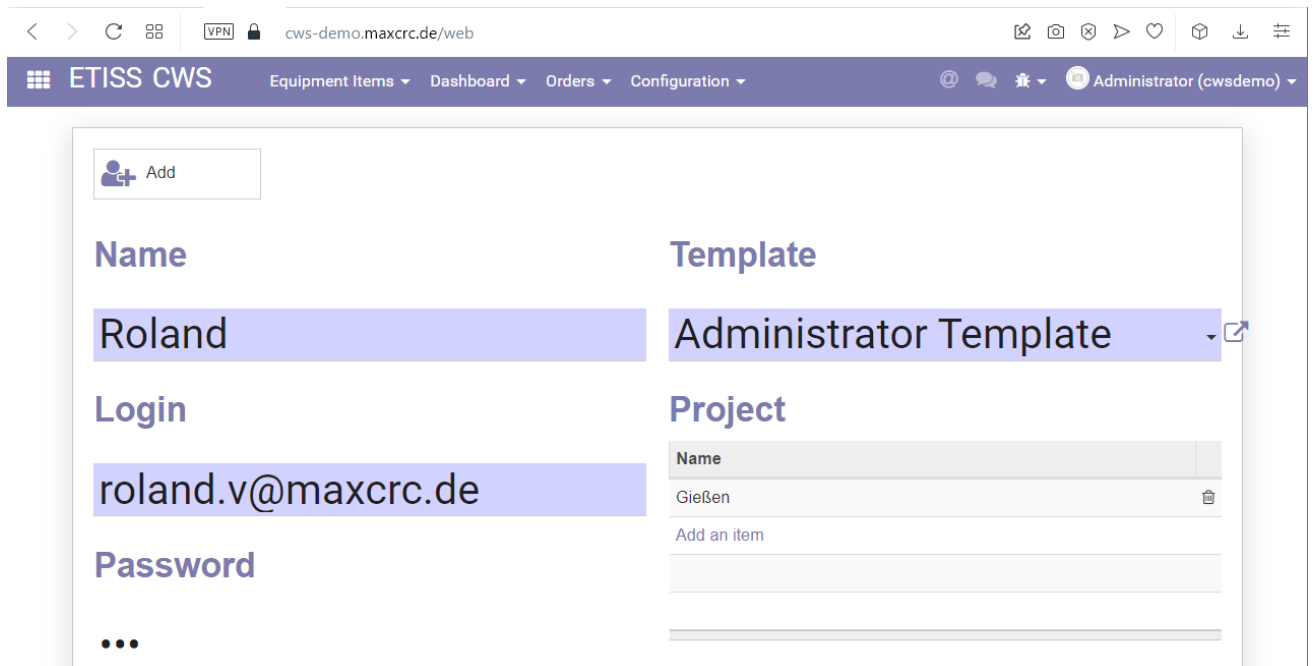

Assigning a project to a user

To assign a project while creating a new user, in the **Project** area click **Add item** and select the required project and click **Add** button. If you've already created a user, you can open a project where you'd like to add the user, then select **Users** tab and add a user there.


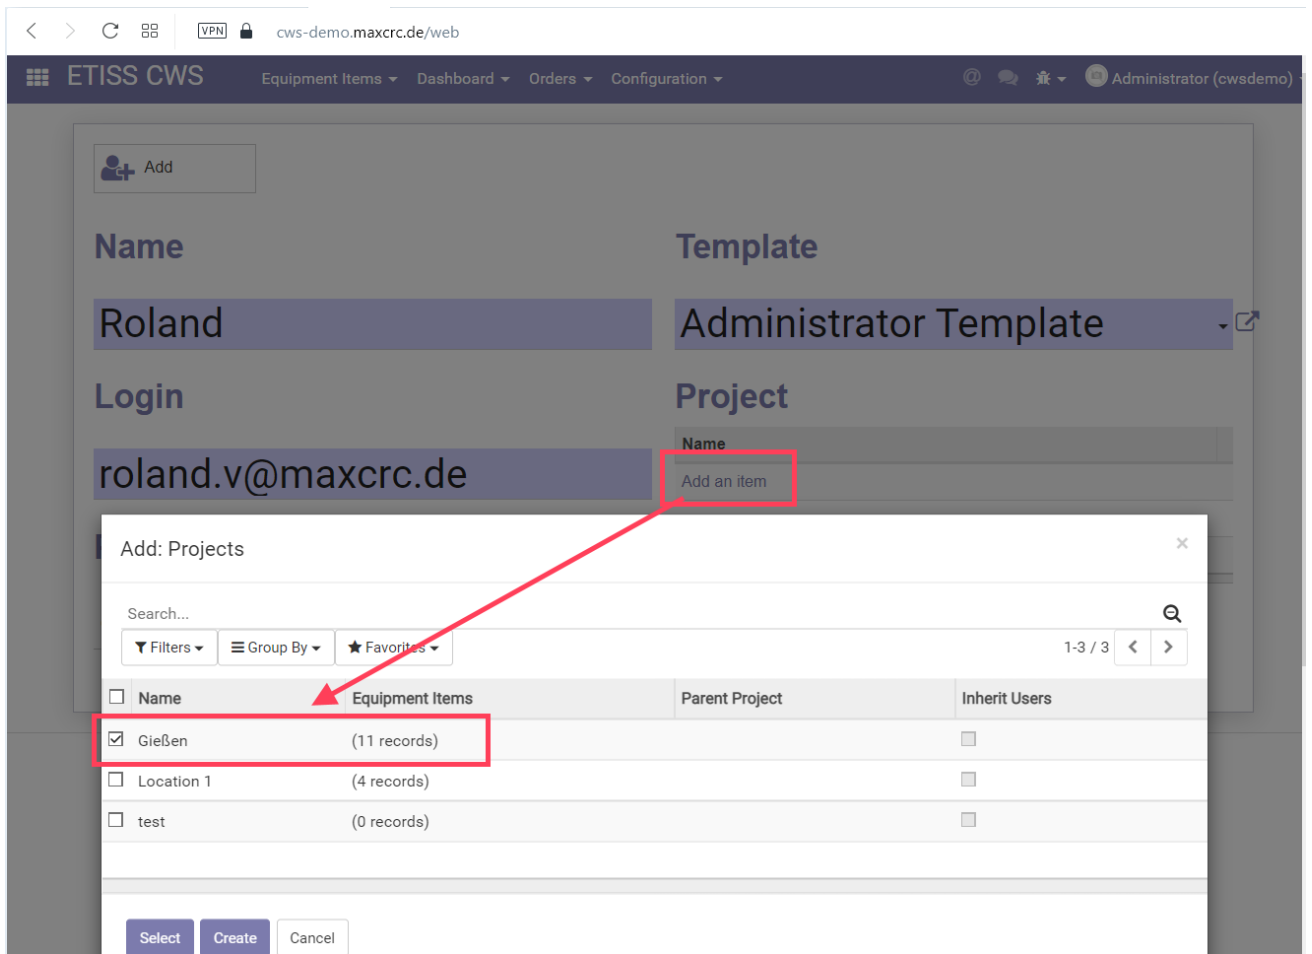


TICKETS

Ticket generator

Ticket generator allows to generat a specified number of tickets and print them out if needed. This feature can be used, for example, in case if you need to create a lot of free tickets and give them to people.


To open ticket generator, navigate to **Main menu -> Tickets -> Configuration -> Ticket generator**

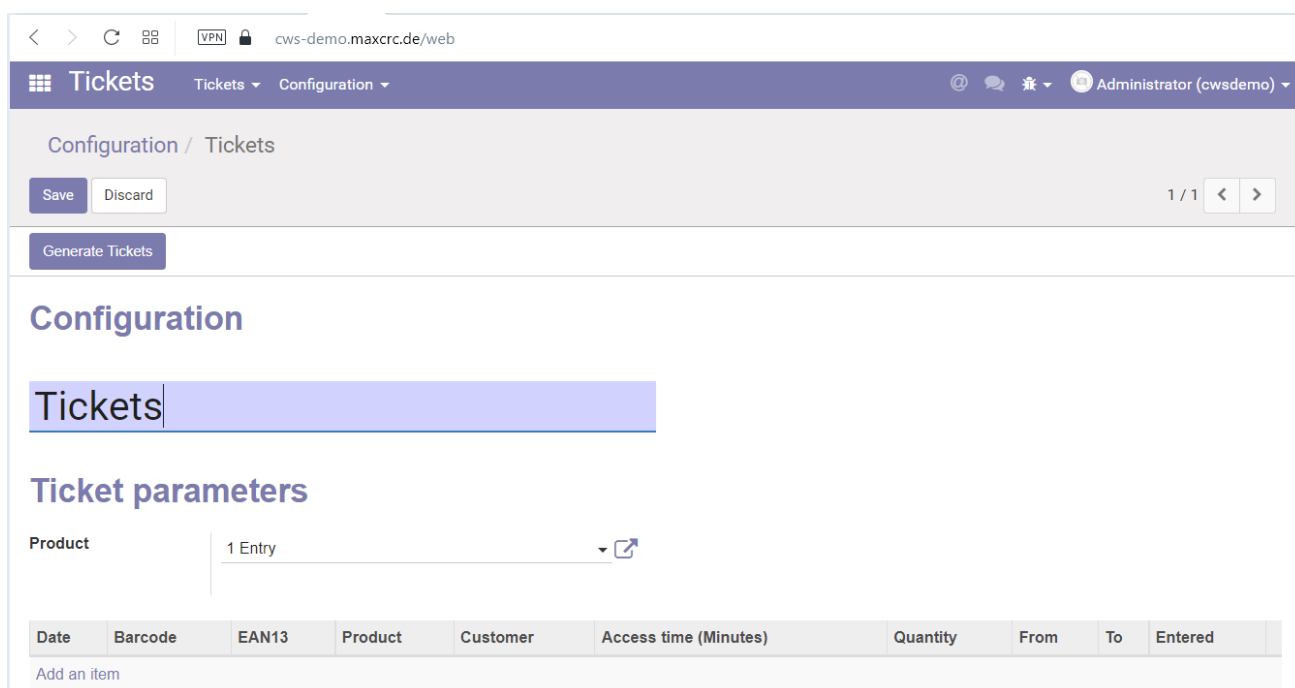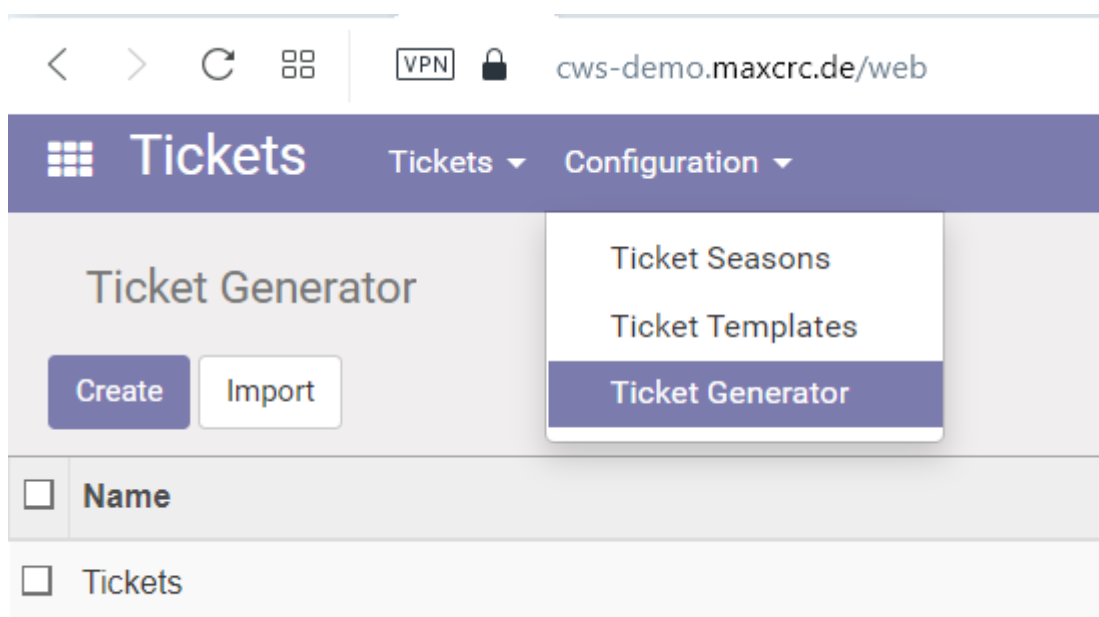

Next, fill in the following fields:

- **Name:** The name of the generated tickets (not printed anywhere, just a display name)
- **Product:** The product based on which tickets will be generated. (Ex: to generate free tickets, you need to select free product here)


click **Save**, and after that click **Generate tickets** button.

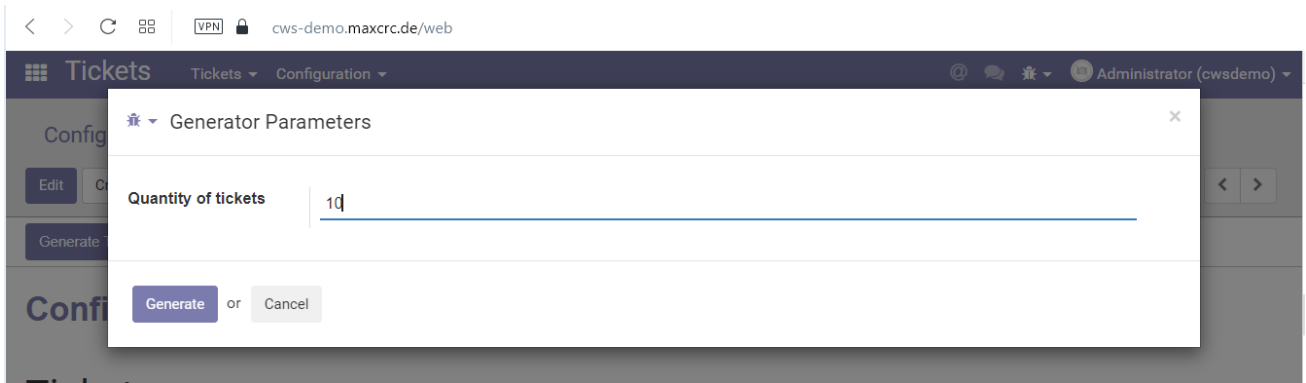

Select the number of tickets to generate and click **Generate**

Printing generated tickets

Once tickets were generated, you can print them out by pressing **Print generated tickets** button.

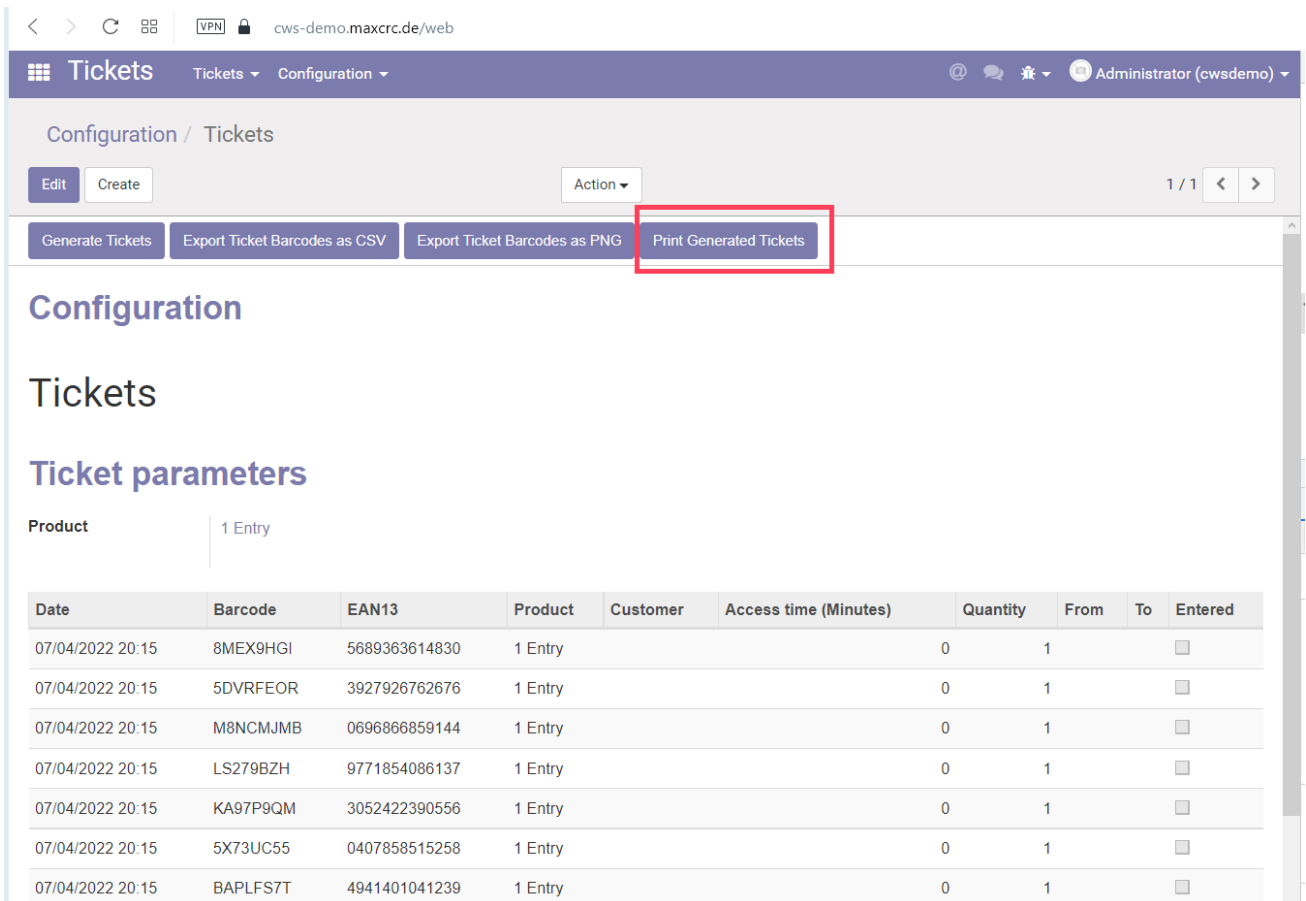


RFID CARDS

RFID cards generator

RFID card generator can be used with reader to mass register RFID cards. An operator scans the card with the reader, these cards then being added to the list of cards separated by the line break, space, comma, or semicolon. And finally, after selecting the card type, these cards then can be registered in the system in one click.

Generating RFID cards

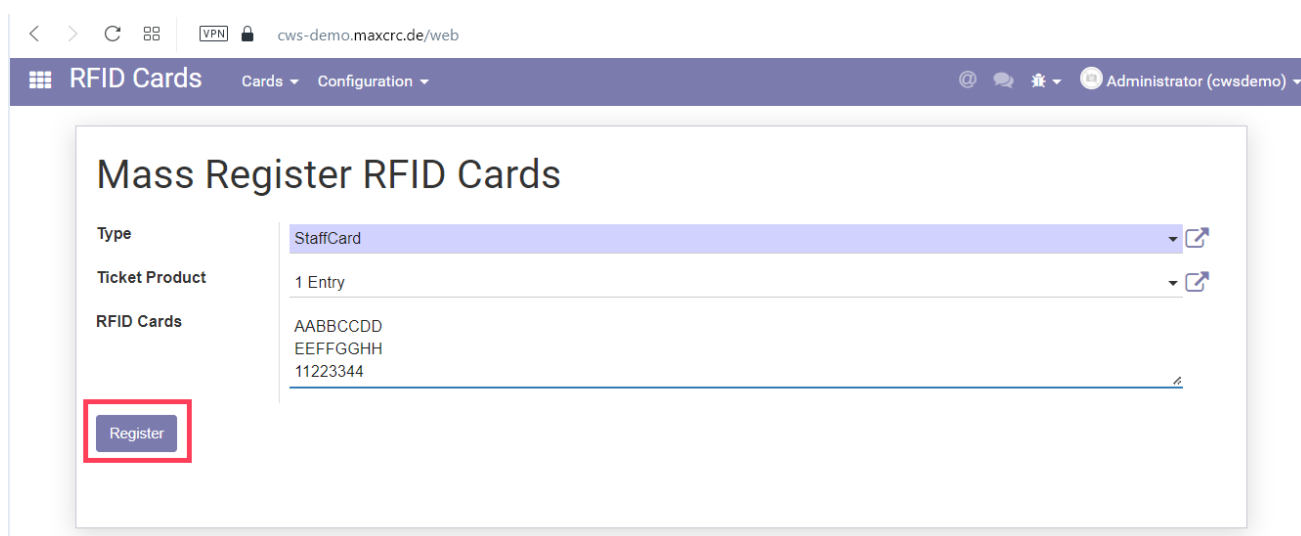

The screenshot shows a web browser window with the URL `cws-demo.maxcrc.de/web`. The page title is "RFID Cards" and the navigation menu includes "Cards" and "Configuration". The user is logged in as "Administrator (cwsdemo)". The main content area is titled "Mass Register RFID Cards" and contains the following form fields:

Type	StaffCard
Ticket Product	1 Entry
RFID Cards	AABBCCDD EEFFGGHH 11223344

A "Register" button is located at the bottom left of the form and is highlighted with a red box.


To use RFID cards generator go to **RFID cards** -> **Configuration** -> **Mass register** and fill in the following fields:

- **Type:** The type of RFID card to be registered
- **Ticket product:** The product on which the linked ticket will be based
- **RFID cards:** An array of RFID cards to be registered. These can be obtained from card reader or pasted via clipboard manually. The system understands the following card separation symbols: **line break**, **space**, **comma**, or **semicolon**.

Assigning a partner to generated card

After all necessary cards were successfully generated you can assign a previously created partner to them. This can be done by opening a card and selecting a partner.


From the menu **RFID cards** -> **Cards** -> **Registered cards** open any card, click **Edit** and in the **Partner** field select desired partner.

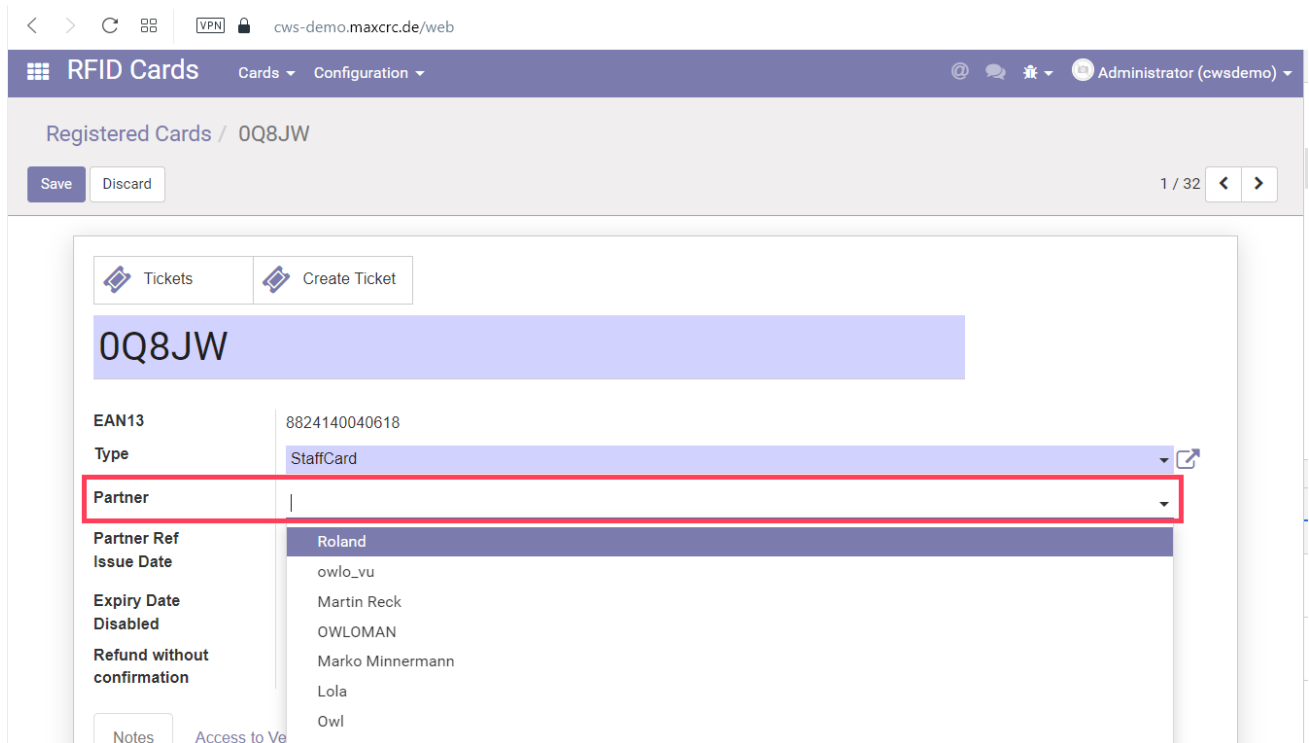


Now this card is associated with a partner.

Assigning a card to Vending Unit

After assigning a partner to a card, this card can be linked to the vending unit with a specified access level. To do this, login as Administrator, find and open a vending unit to which you need to link a card, and click on its configuration settings. In this case it's **VU Single FMCU** link.

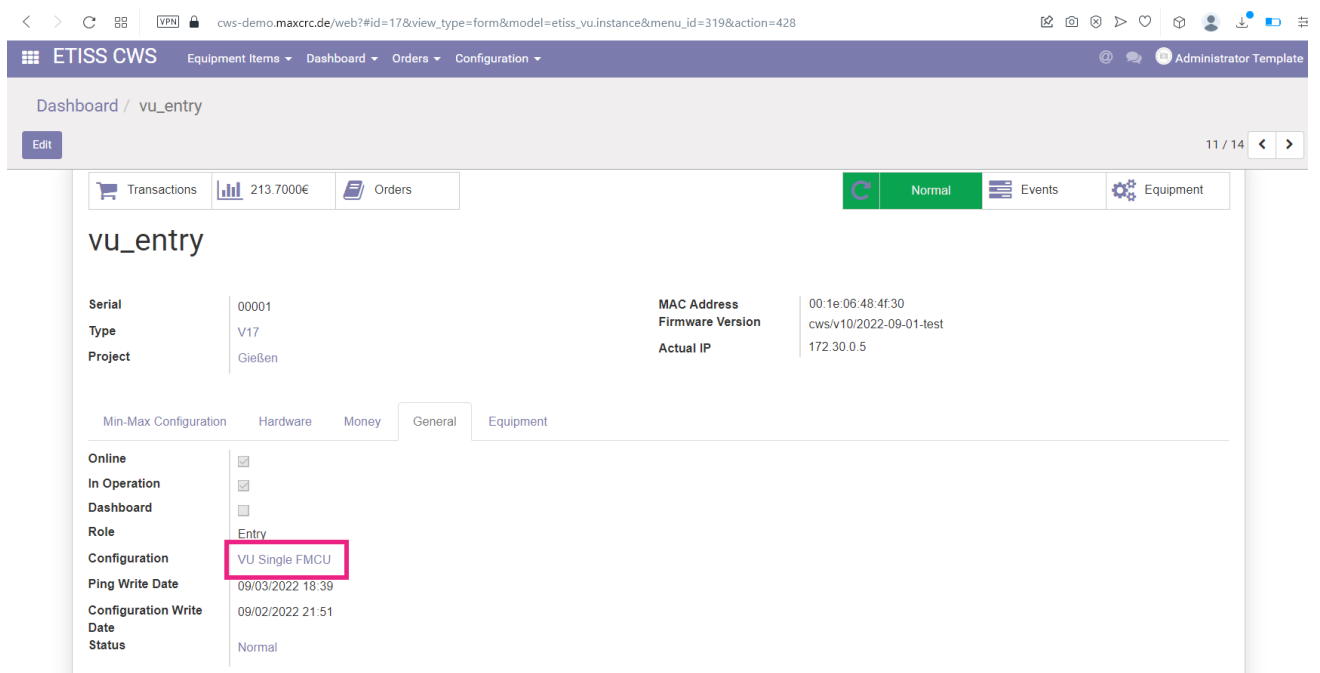

On the **Service cards** tab you can add cards and specify their corresponding access level.

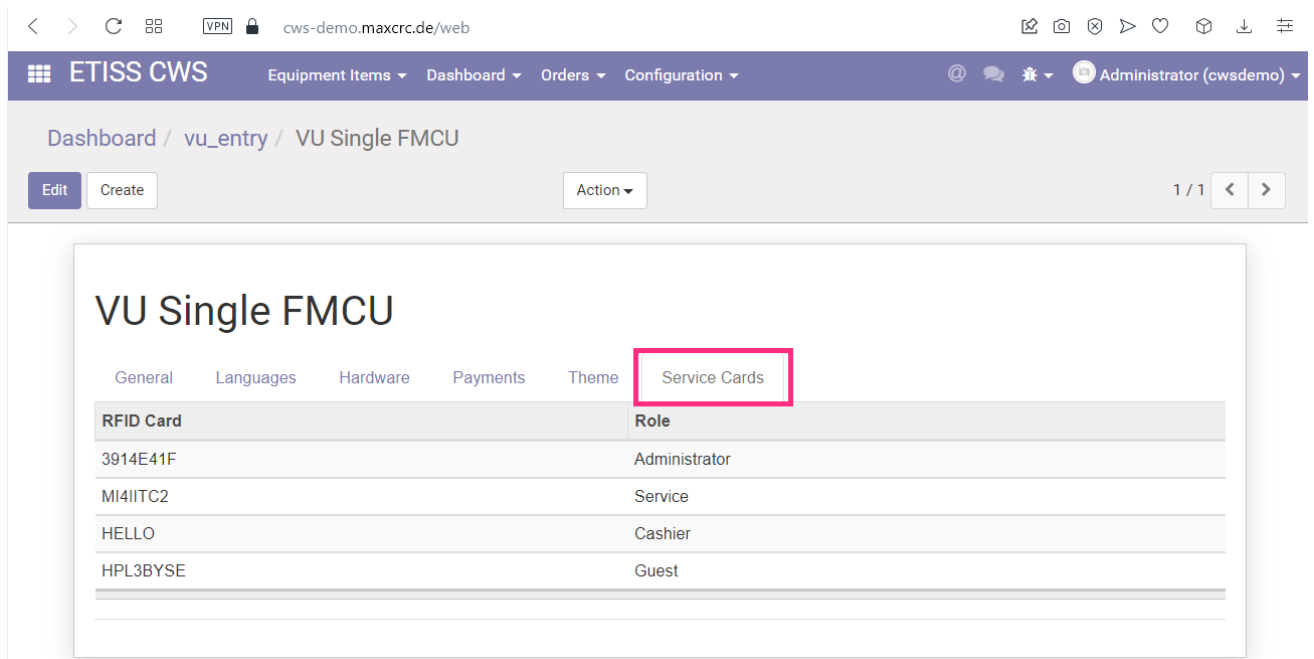

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration | Administrator (cwsdemo)

Dashboard / vu_entry / VU Single FMCU

Buttons: Edit, Create, Action

VU Single FMCU


General | Languages | Hardware | Payments | Theme | **Service Cards**

RFID Card	Role
3914E41F	Administrator
MI4IITC2	Service
HELLO	Cashier
HPL3BYSE	Guest

Assigning a card to project

The card also can be linked to a project. But you have to keep in mind that assigning a card to a particular VU configuration has precedence over assigning it to the project.

To assign a card to a project, go to the **Etiss CWS -> Configuration -> Projects** menu, select a project and on the **Service cards** tab link a card with corresponding access level.

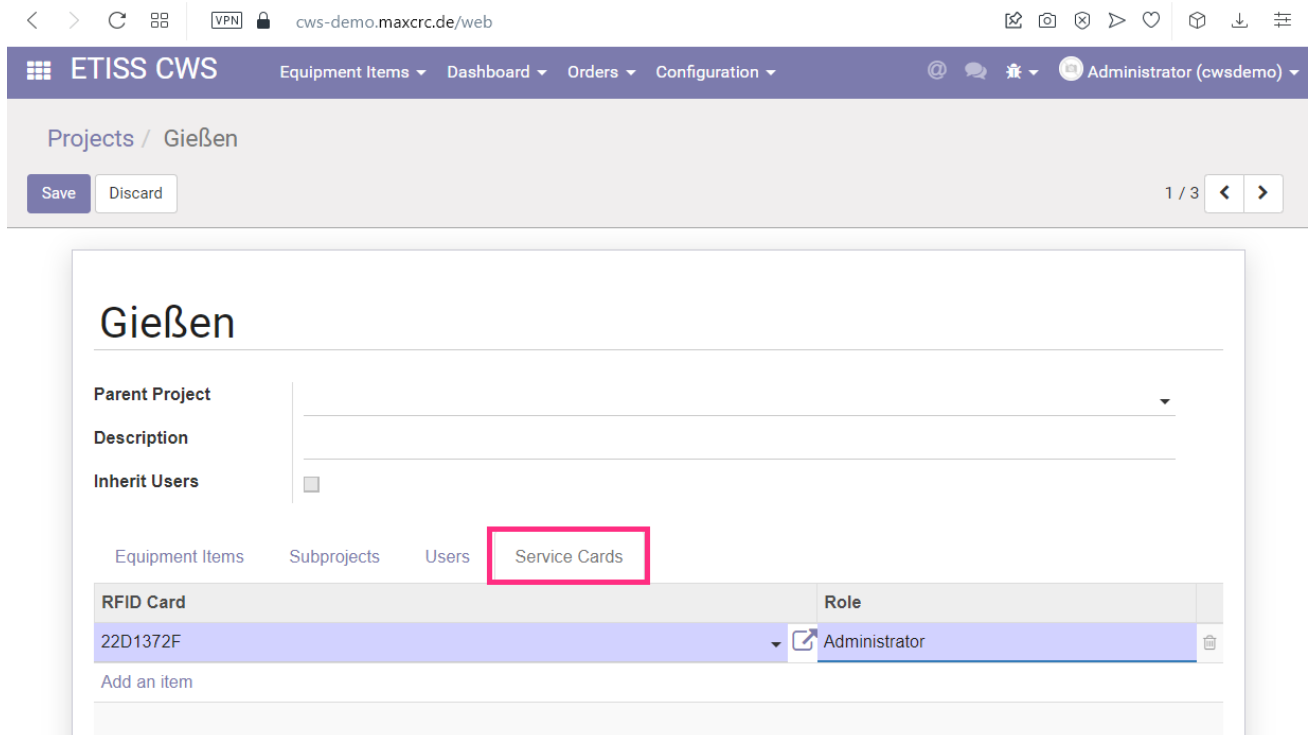

ETISS CWS | Equipment Items | Dashboard | Orders | Configuration | Administrator (cwsdemo)

Projects / Gießen

Buttons: Save, Discard

Gießen

Parent Project: _____

Description: _____

Inherit Users:


Equipment Items | Subprojects | Users | **Service Cards**

RFID Card	Role
22D1372F	Administrator

Add an item

PRINTING TEMPLATES

CWS Administrator has access to and can edit all printing templates for supported printers. To open the list of templates navigate to the **ETISS CWS/Configuration/Printer templates** menu:

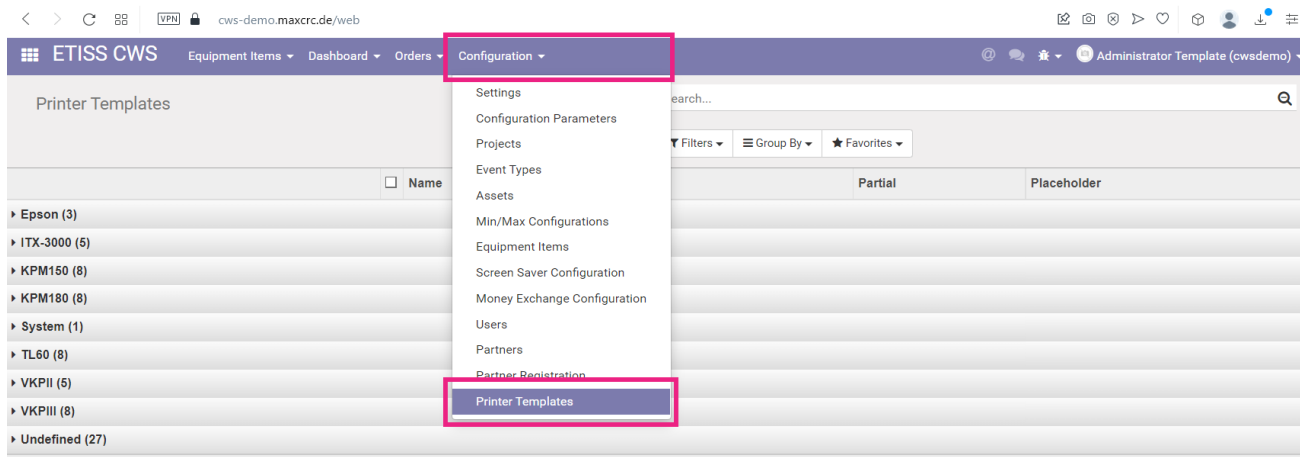


This menu displays all available printing templates in the system. All templates are grouped by the printer type.

Finding your printer model


If you need to change something in one of the printing templates, you need to understand which printer model is being used in your Vending Unit. Typically a Vending Unit is assigned one printer model and it can't be changed from backend. So, you need to look at the hardware for finding which printer model is used.

Once you've found out which printer model is used for the particular VU, you can find all printing templates in corresponding section of the template list. For example, if your printer model is **KPM 150**, all reports that you can change are located in **KPM 150** section:

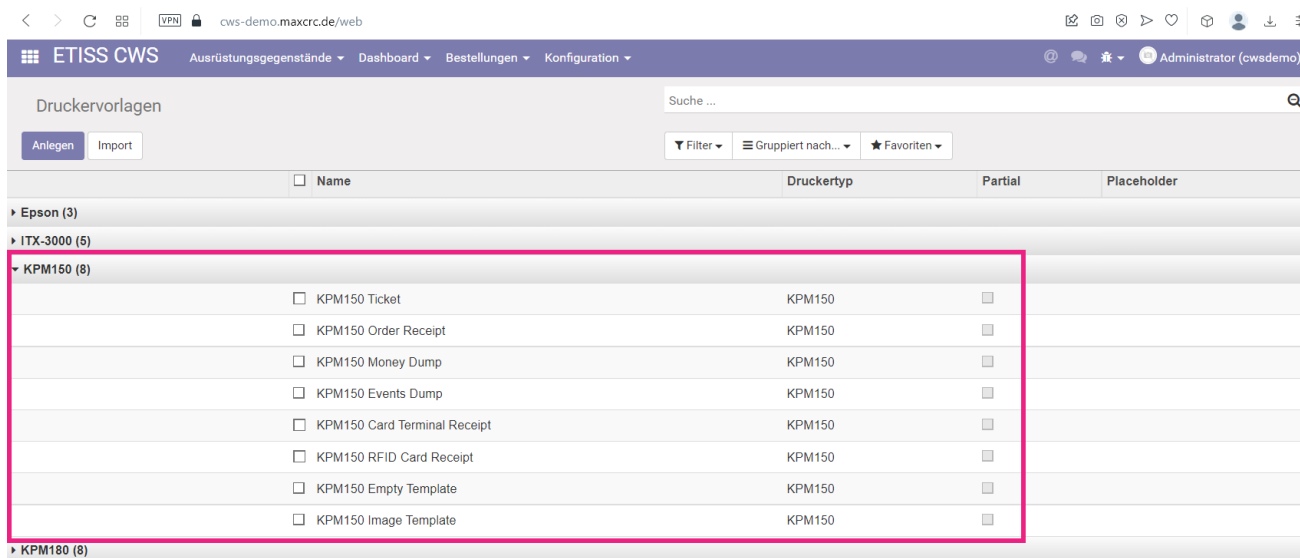

Template structure

Let's look at the typical printing template. As an example we'll take **KPM 150 Ticket** template. We'll use **KPM 150** printer model throughout this section of documentation.

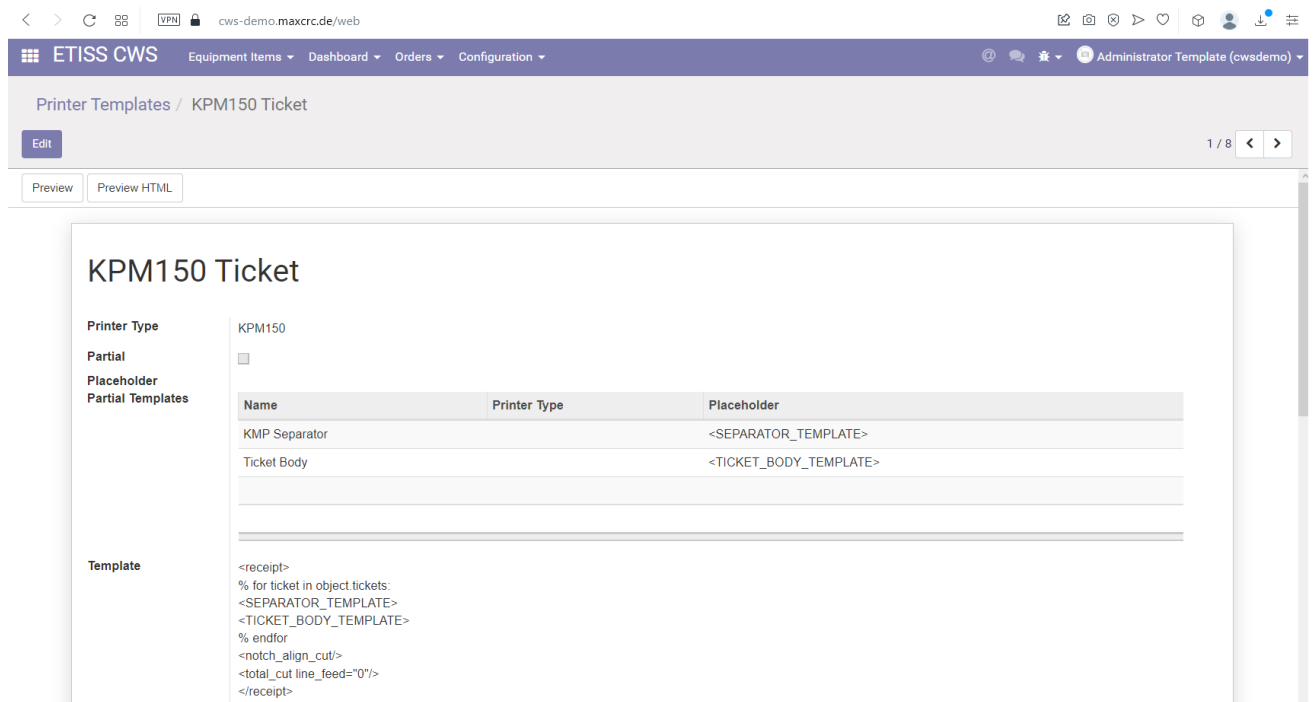

The screenshot shows the ETISS CWS web interface. The browser address bar displays 'cws-demo.maxcrc.de/web'. The navigation menu includes 'Equipment Items', 'Dashboard', 'Orders', and 'Configuration'. The current page is 'Printer Templates / KPM150 Ticket'. There are buttons for 'Edit', 'Preview', and 'Preview HTML'. The main content area shows the configuration for the 'KPM150 Ticket' template.

Name	Printer Type	Placeholder
KMP Separator		<SEPARATOR_TEMPLATE>
Ticket Body		<TICKET_BODY_TEMPLATE>

Printer Type
KPM150

Partial


Placeholder
Partial Templates

Template
<receipt>
% for ticket in object.tickets:
<SEPARATOR_TEMPLATE>
<TICKET_BODY_TEMPLATE>
% endfor
<notch_align_cut/>
<total_cut_line_feed="0"/>
</receipt>

Each template has a set of properties such as:

- **Printer type:** The type of the printer to which this template applies
- **Partial:** This indicates whether this template is a part of another template or not
- **Placeholder:** A string of text that will be used as a placeholder for insertion of this template into another one
- **Partial templates:** A list of another templates which are inserted into current one
- **Template:** The template body

Some of the templates such as **Ticket body** are used in multiple places across different reports because it's a common part of the template.

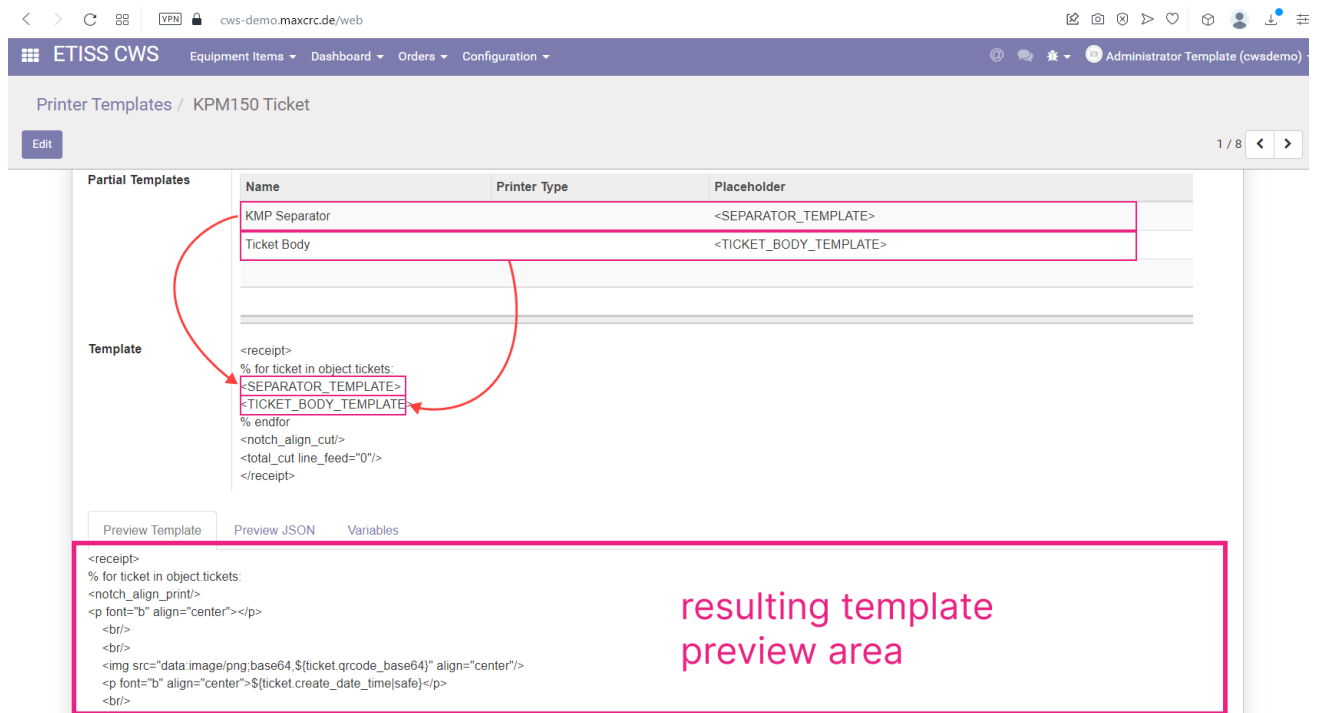

Printer Templates / KPM150 Ticket

Partial Templates	Name	Printer Type	Placeholder
	KMP Separator		<SEPARATOR_TEMPLATE>
	Ticket Body		<TICKET_BODY_TEMPLATE>


```

<receipt>
% for ticket in object.tickets:
<SEPARATOR_TEMPLATE>
<TICKET_BODY_TEMPLATE>
% endfor
<notch_align_cut/>
<total_cut_line_feed="0"/>
</receipt>

```

resulting template preview area

Probably the one template area that's changed most frequently depending on project requirements is ticket body. To change something there, open the ticket body template and in the **Template** area make necessary changes, then save the template - your changes will be applied.

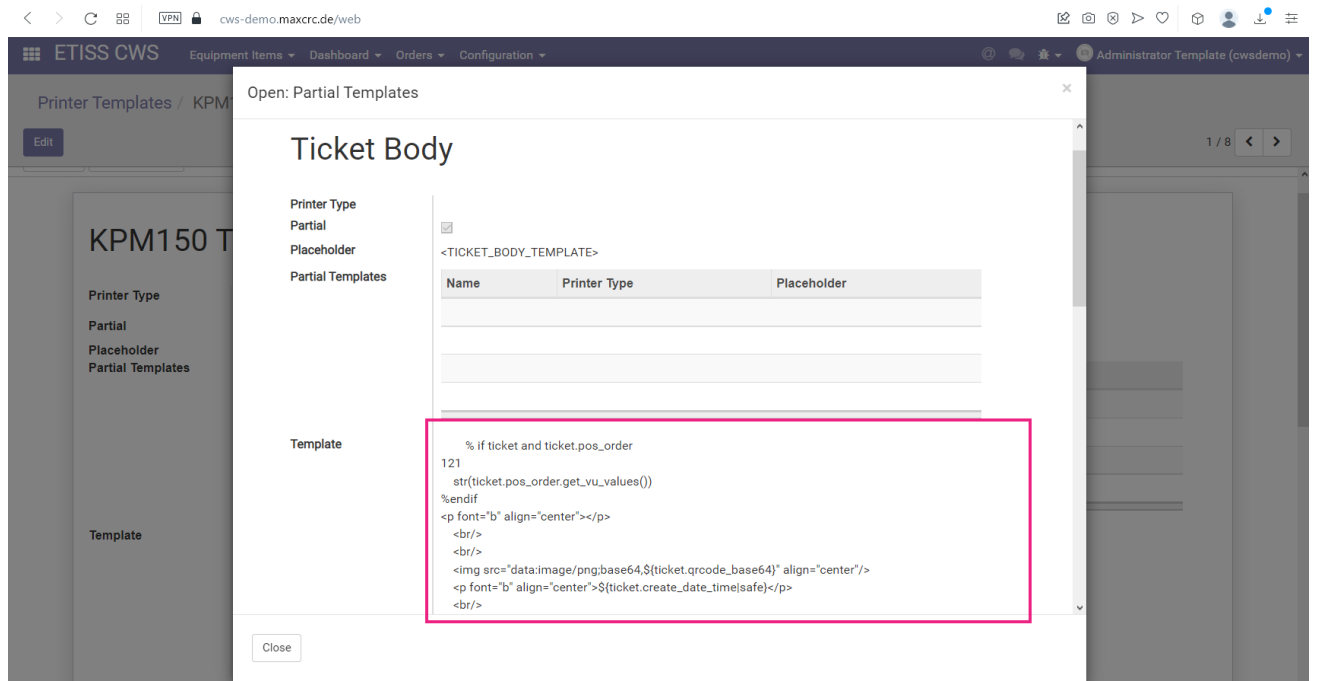

Open: Partial Templates

Ticket Body

Printer Type: Partial

Placeholder: <TICKET_BODY_TEMPLATE>

Name	Printer Type	Placeholder

```

% if ticket and ticket.pos_order
121
str(ticket.pos_order.get_vu_values())
%endif
<p font="b" align="center"></p>
<br/>
<br/>


<p font="b" align="center">${ticket.create_date_time|safe}</p>
<br/>

```

Close

Ticket template

One of the most frequently used templates is a **Ticket template**. It's used for ticket printing during the purchase process.

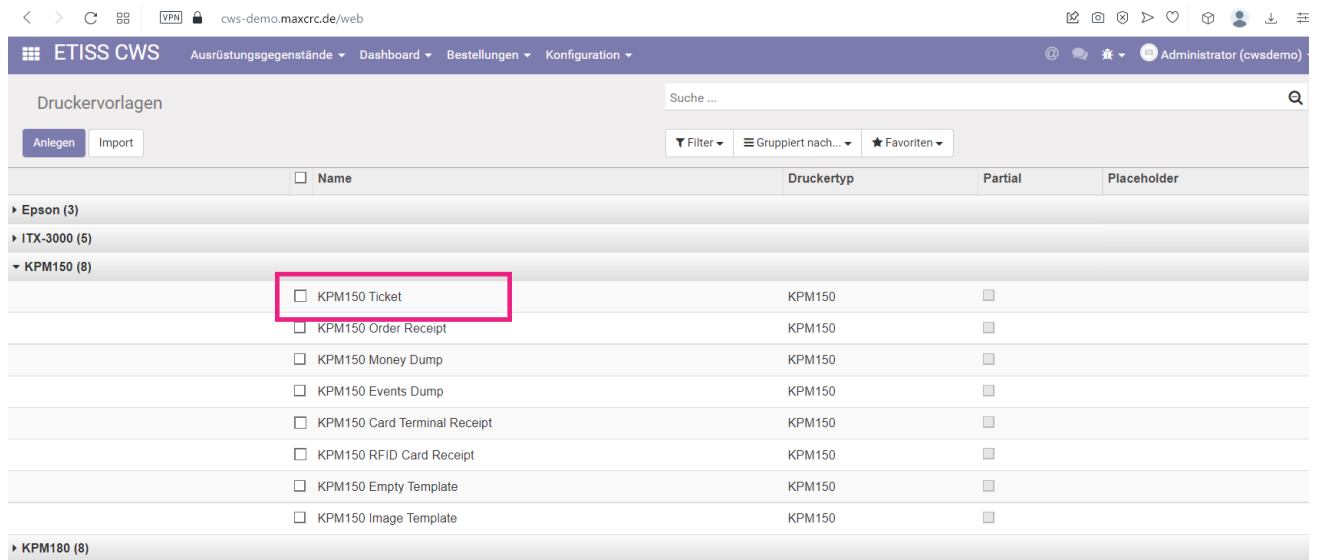

The screenshot shows the 'Druckervorlagen' (Print Templates) section of the ETISS CWS application. The interface includes a search bar, navigation tabs, and a table of templates. The 'KPM150 Ticket' entry is highlighted with a red box.

<input type="checkbox"/>	Name	Druckertyp	Partial	Placeholder
▶ Epson (3)				
▶ ITX-3000 (5)				
▶ KPM150 (8)				
<input type="checkbox"/>	KPM150 Ticket	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Order Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Money Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Events Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Card Terminal Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 RFID Card Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Empty Template	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Image Template	KPM150	<input type="checkbox"/>	
▶ KPM180 (8)				

Here's how it looks:



09.09.2022 10:17

Sie finden unsere Einlösepartner auf unserem Aushang und auf der Center Webseite unter 'Service'.


You find our redemption partners on our printout and on the center website under 'Service'.

Order Receipt template

If the customer wants to print a receipt of their purchase, the **Order Receipt template** is used in this case. In the CWS project order receipts are not used.

Money Dump template

There's a feature of receipt printing when VU door was opened. The **Money Dump** template is used in this case.

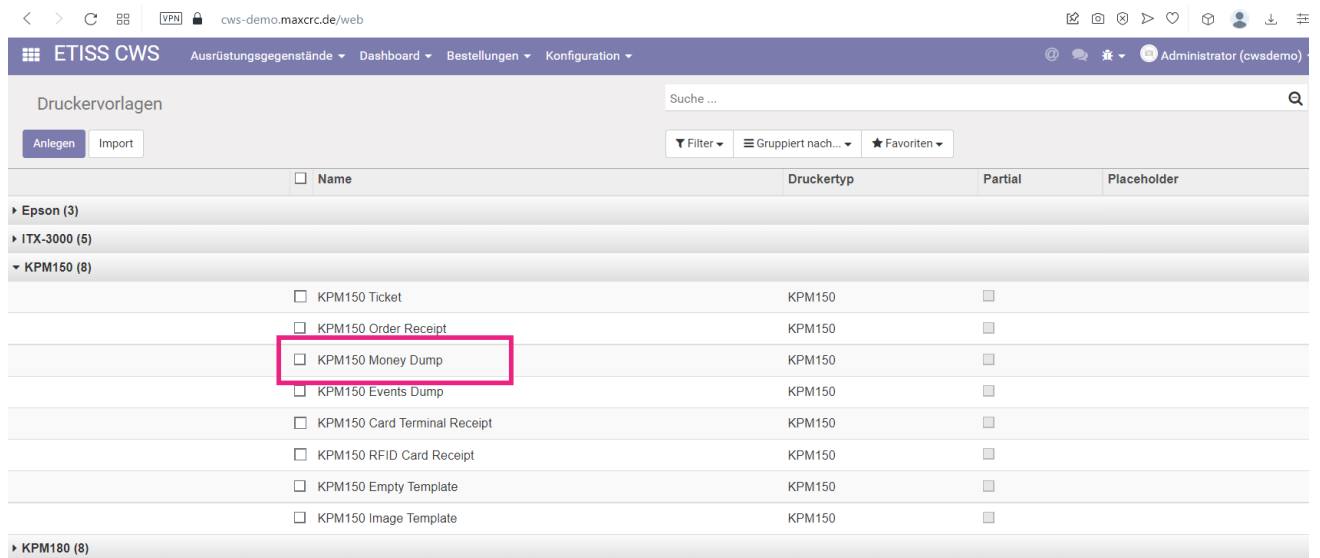

The screenshot shows the ETISS CWS web interface. The page title is 'Druckervorlagen' (Print Templates). The breadcrumb navigation is 'Ausrüstungsgegenstände > Dashboard > Bestellungen > Konfiguration'. The user is logged in as 'Administrator (cwsdemo)'. The page contains a search bar and several filters. The main content is a table of print templates.

<input type="checkbox"/>	Name	Druckertyp	Partial	Placeholder
▶ Epson (3)				
▶ ITX-3000 (5)				
▼ KPM150 (8)				
<input type="checkbox"/>	KPM150 Ticket	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Order Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Money Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Events Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Card Terminal Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 RFID Card Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Empty Template	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Image Template	KPM150	<input type="checkbox"/>	
▶ KPM180 (8)				

Here's how this template looks on the simulator:

VU Serial Number: 00001

Receipt Number: 1473

Date: 09.09.2022

Time: 09:46

BillBox

3x5,00 EUR

Gesamt

15,00 EUR

BillPayout

10x5,00 EUR

Gesamt

50,00 EUR

CoinCashbox

1000x2,00 EUR

11x0,50 EUR

2x0,10 EUR

Gesamt

2005,70 EUR

Hopper1


1x1 EUR

Gesamt

1 EUR


Hopper2

1000x0.1 EUR

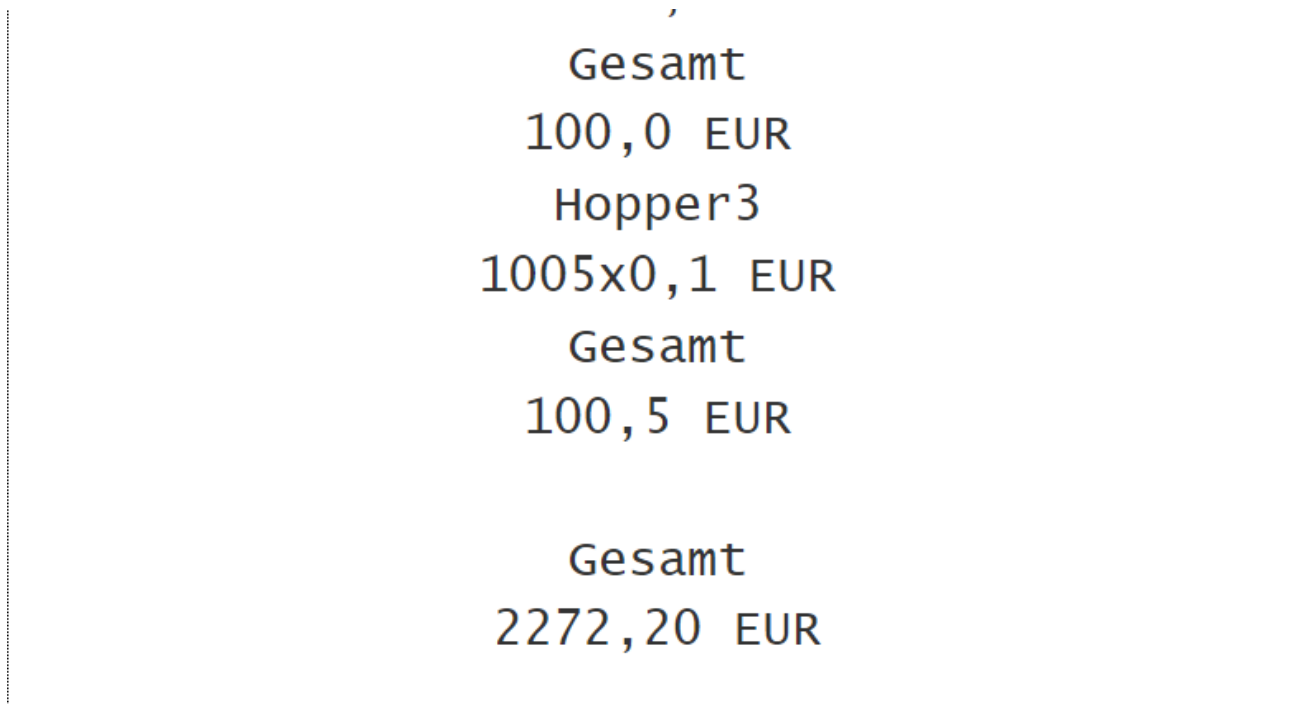

Events Dump template

This template is used to print out all current events that happened on the Vending Unit.

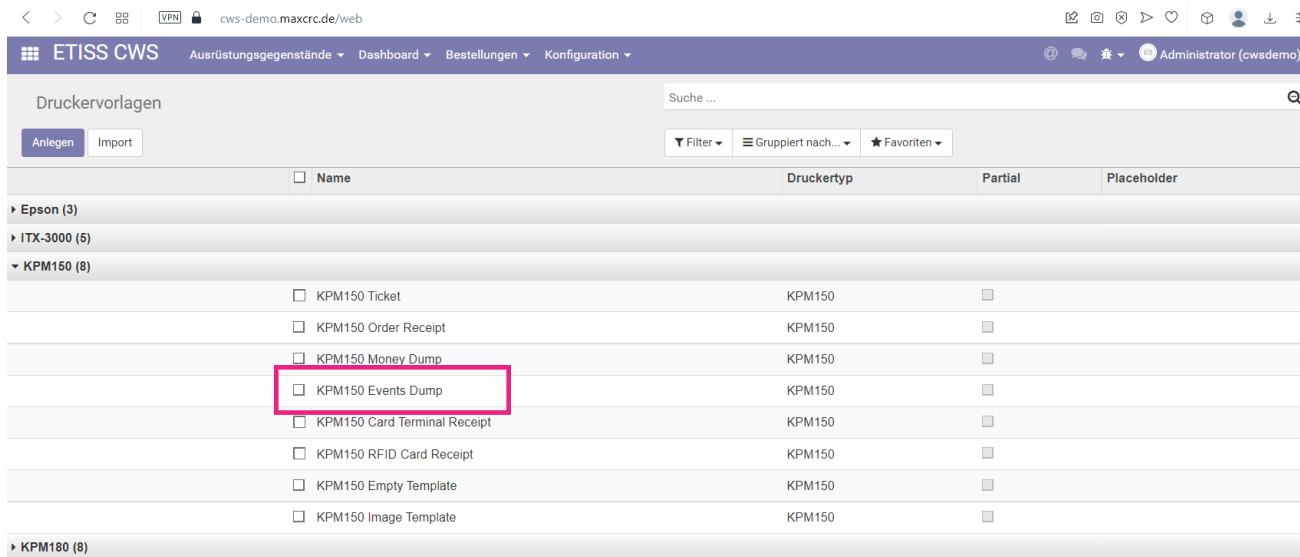

Here's how this template looks on the simulator:

Ereignisse

* 09.09.2022 10:00:38

Administrator

Depot außer Betrieb - Ende

* 09.09.2022 10:00:38

Administrator

Unbefugte Türöffnung - Ende

* 09.09.2022 10:00:38

Administrator

Login

* 09.09.2022 10:00:32

Bezahlungsfunktion deaktiviert

* 09.09.2022 10:00:32

Depot außer Betrieb - Start

* 09.09.2022 10:00:32

Unbefugte Türöffnung - Start


* 09.09.2022 10:00:32

Automaten-Türe wurde geöffnet

```
* 09.09.2022 10:00:23
Bezahlfunktion aktiviert
* 09.09.2022 10:00:22
Logout
* 09.09.2022 10:00:22
Administrator
Bezahlfunktion deaktiviert
* 09.09.2022 10:00:22
Administrator
Login
```


Card Terminal Receipt template

If the customer wants to print a receipt of their purchase when paying through card terminal, the **Card Terminal Receipt template** is used in this case. In the CWS project card terminal receipts are not used.

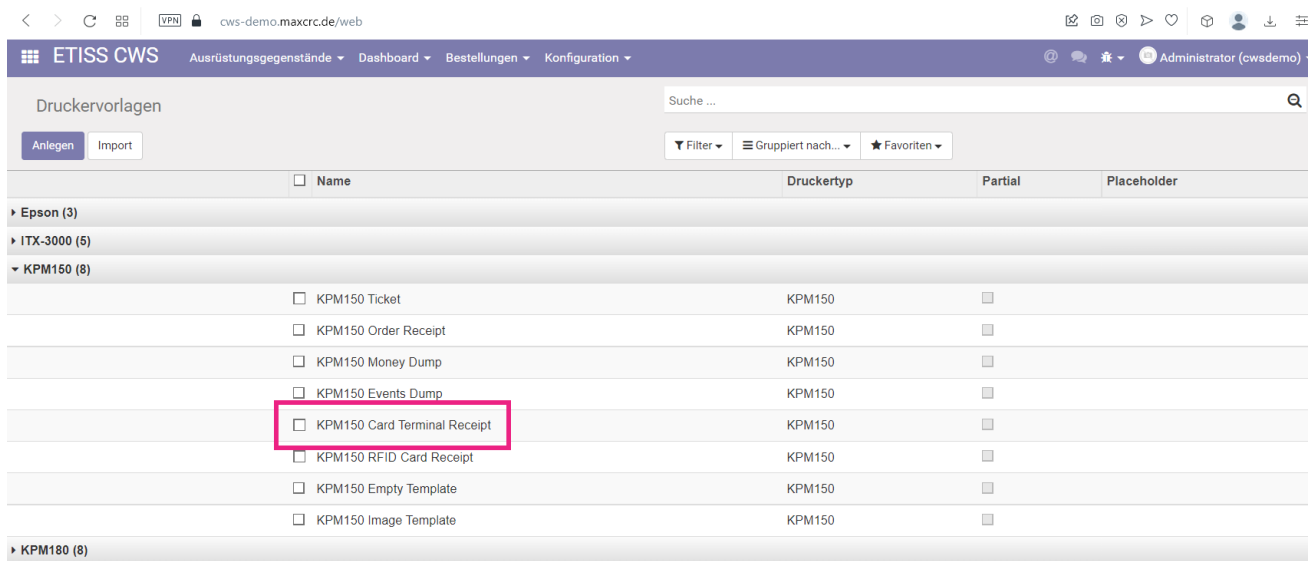

Additional service templates

Templates such as **RFID Card Receipt**, **Empty Template**, **Image Template** are used only in special cases for specific projects. They mostly help creating other templates quickly without changing too much code. We won't go in too much detail about them.

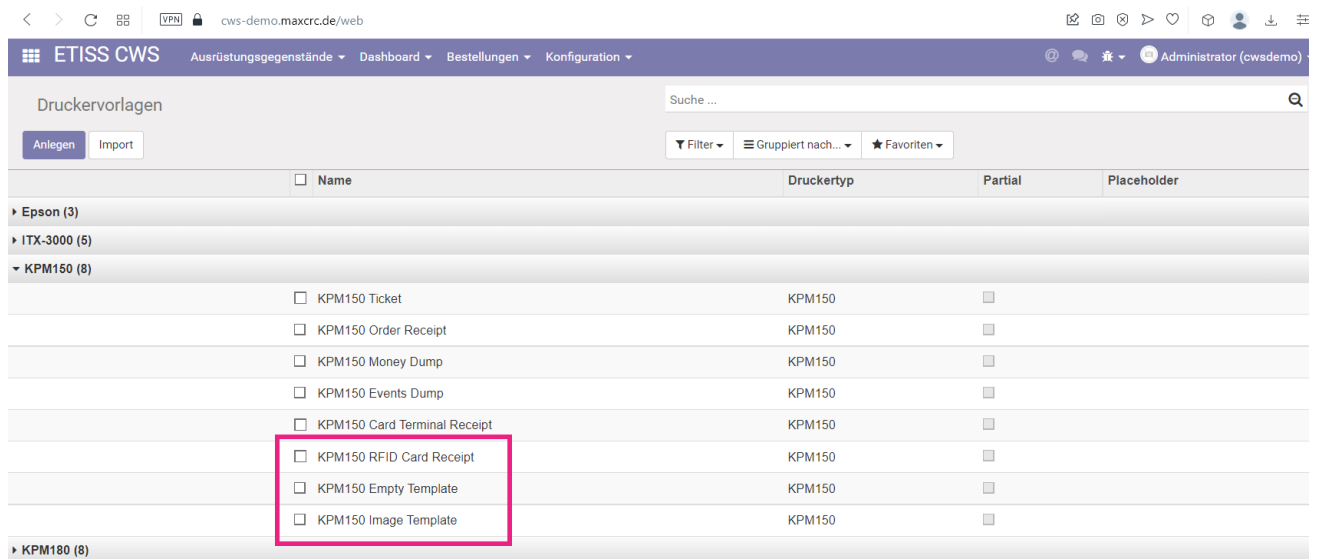

The screenshot shows the 'Druckervorlagen' (Print Templates) section of the ETISS CWS application. The interface includes a search bar, navigation tabs, and a table of templates. The table has columns for 'Name', 'Druckertyp', 'Partial', and 'Placeholder'. The 'KPM150' group is expanded, showing several templates. The last three templates in this group are highlighted with a red box: 'KPM150 RFID Card Receipt', 'KPM150 Empty Template', and 'KPM150 Image Template'.

<input type="checkbox"/>	Name	Druckertyp	Partial	Placeholder
▶ Epson (3)				
▶ ITX-3000 (5)				
▶ KPM150 (8)				
<input type="checkbox"/>	KPM150 Ticket	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Order Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Money Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Events Dump	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Card Terminal Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 RFID Card Receipt	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Empty Template	KPM150	<input type="checkbox"/>	
<input type="checkbox"/>	KPM150 Image Template	KPM150	<input type="checkbox"/>	
▶ KPM180 (8)				