

## Gate ~ FMCU ~ management dashboard/en




<b>Inhaltsverzeichnis</b>	
1 General .....	1
2 Headline .....	1
3 Menu items .....	2
3.1 Gates .....	2
3.1.1 Set up a new Gate .....	2
3.1.2 Edit existing Gate .....	5
3.1.3 Remove Gate .....	6
4 Connectivity Board .....	8
5 Configuration Management .....	9
5.1 Architecture .....	15
5.2 Roadmap .....	16
6 Management of Events .....	17
7 Events .....	17
8 Event Definitions Page .....	17
9 Event Definition Groups .....	18
10 Event Subscriptions .....	18
11 Configuration .....	19

## General

The Wanzl Access Manager offers a central dashbaord for access controls in a homogeneous interface, displays the corresponding states and supports the user in the administration of these components. The Wanzl Access Manager is a leading platform for monitoring and managing access controls of security areas.

## Headline



Number	Function
1	Button Management Dashboard
2	Administration
3	Events Button
4	Cards Button
5	Statistics Button


6	Logged in User
7	Log out Button
8	Languages menu
9	Adjust the display to entire width of the screen

## Menu items

## Gates


<https://<dns-name or ip-address>/gates>

In this view, all access controls are shown in an intuitive interface. There are grouping options in two categories. First of all, you can group by **location**. You can then combine different **positions** within the location. Individual gates can be added using the "New" menu item.

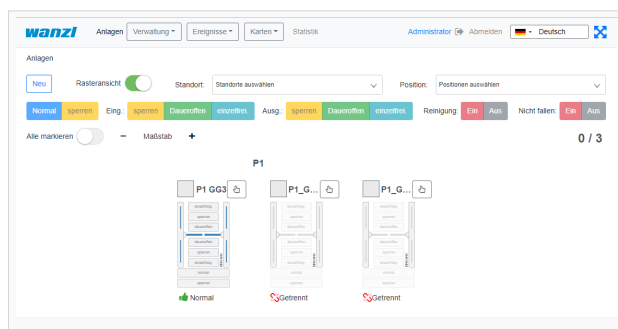


## Set up a new Gate

In this view you create a **new** gate. The fields **names**, **displayed name** and **Position** of the Gate must be verified with values. Then click on Attachments.

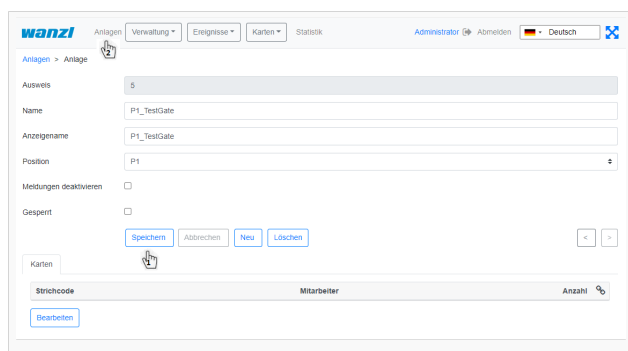


You can now see in the view that you have created a **NEW** gate, in this case the fourth gate in this view.

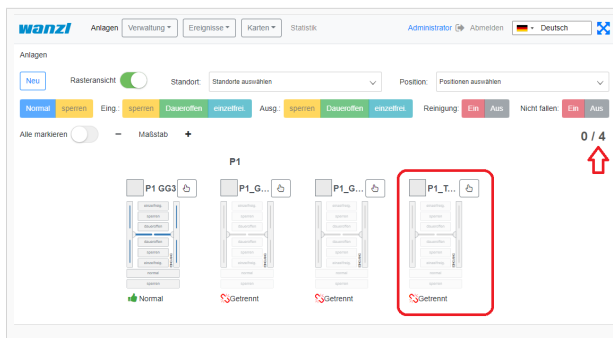

In the next step you connect the gate to the server.

`https://<IP-Adresse des Dashboards>`

To do this, check on the **General** tab that the correct gate name has been entered.

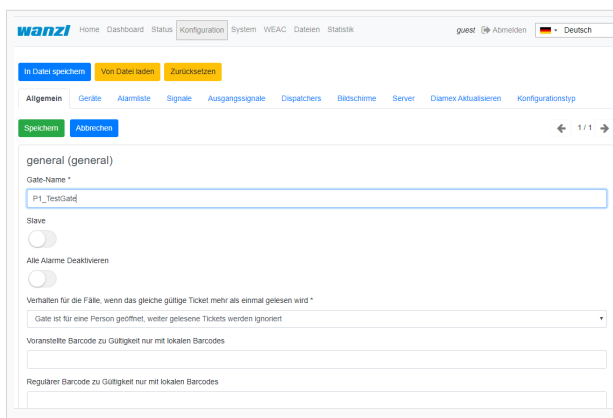

Then check the following points on the **Server** tab.

Server#0 (server)- must be set to remote.

Activated slide-switch is activated.


Your server should be entered under Name\*.

Your URL should be entered under URL\*.

Gate should be entered under Username\*.


Your password should be entered under Password\*.

**Save** at the end.

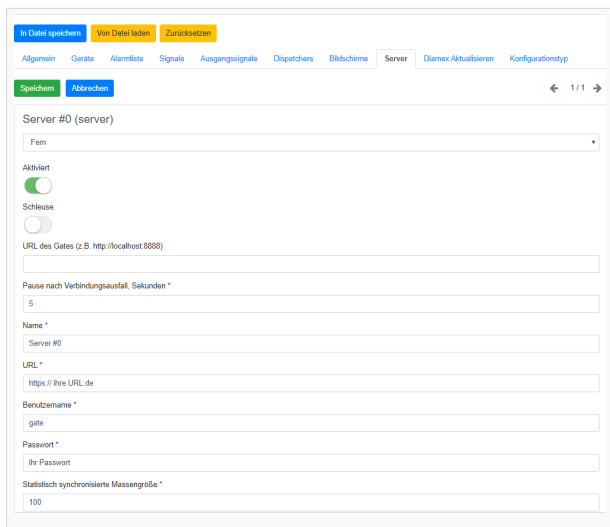


The screenshot shows the configuration page for 'Server #0 (server)'. At the top, there are buttons for 'In Datei speichern', 'Von Datei laden', and 'Zurücksetzen'. Below these are tabs for 'Allgemein', 'Geräte', 'Alarmliste', 'Signale', 'Ausgangssignale', 'Dispatchers', 'Bildschirme', 'Server', 'Diagnose Aktualisieren', and 'Konfigurationstyp'. The 'Server' tab is active. In the top left of the form area, the 'Speichern' button is highlighted in green. The form contains fields for 'Aktiviert' (checked), 'Schleuse', 'URL des Gates', 'Pause nach Verbindungsausfall', 'Name', 'Server #0', 'URL', 'Benutzername', 'Passwort', and 'Statistisch synchronisierte Massengröße'.

In the next step, please click on System in the top bar.

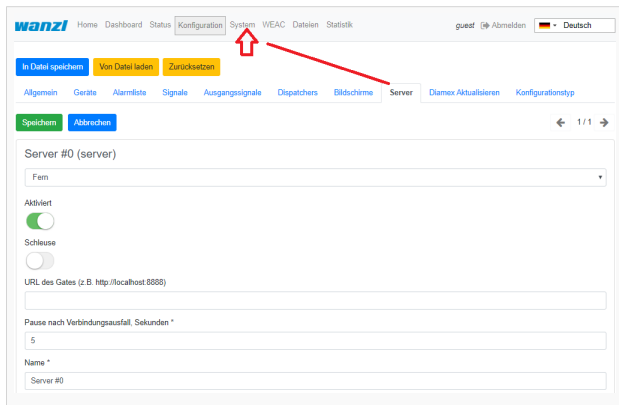

This screenshot is identical to the previous one, but with a red arrow pointing to the 'System' tab in the top navigation bar, which is currently highlighted in grey.

You will now see the following display, here please press restart once. Now your new gate should be connected.

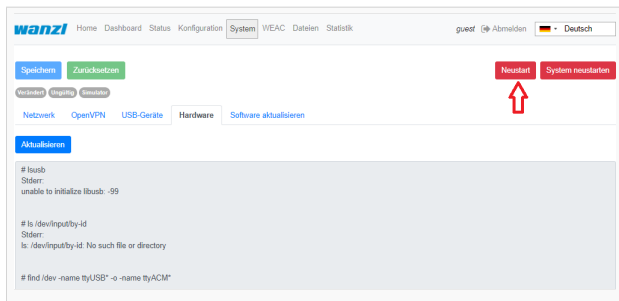


The screenshot shows the 'System' configuration page. The top navigation bar now has 'System' highlighted in grey. In the top right corner, there are two red buttons: 'Neustart' and 'System neustarten'. A red arrow points to the 'Neustart' button. Below the buttons are tabs for 'Netzwerk', 'OpenVPN', 'USB-Geräte', 'Hardware', and 'Software aktualisieren'. The 'Hardware' tab is active. Below the tabs is a terminal window with the following output:

```
# Inusb
Siderr:
unable to initialize libusb- 99

# ls /dev/input/by-id
Siderr:
ls: /dev/input/by-id: No such file or directory

# find /dev -name ttyUSB* -o -name ttyACM*
```

Finally, you can check the connection in the **Status** tab. **CONNECTED** must now appear under State.

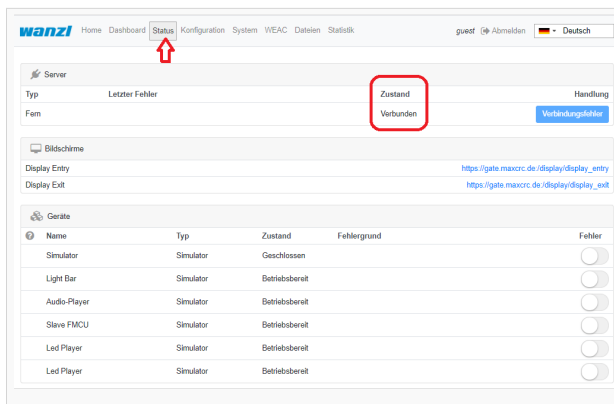


## Edit existing Gate


<https://<dns-name or ip-address>/gates>

You are in the same view as where you would create a new gate.


Please move the slide switch "Grid view" to the left.

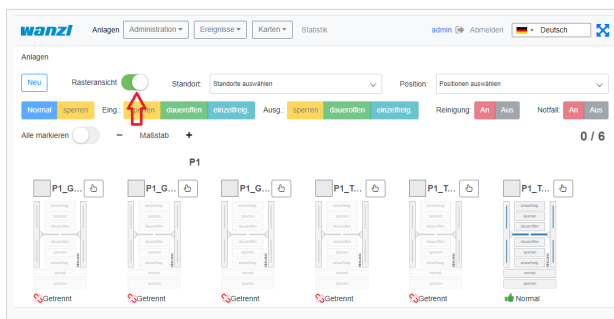

In the view click on the name of the gate which you want to edit (in the example P1\_TestGate2).

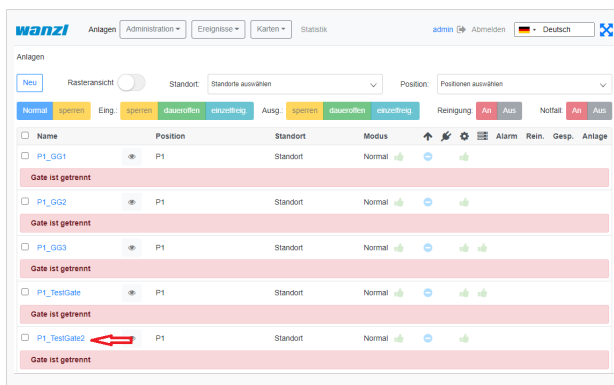

In this view, please press the "Edit" function.

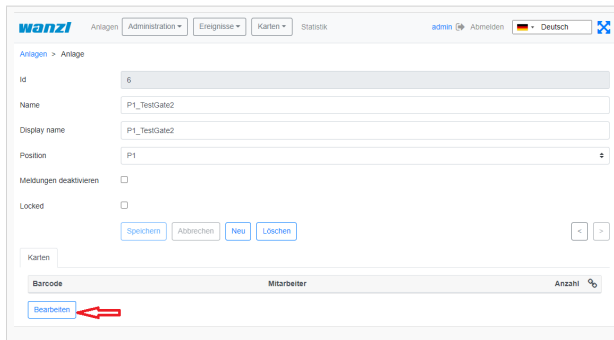

You can now edit the gate in this view.




## Remove Gate


<https://<dns-name or ip-address>/gates>

You are in the same view as where you would create a new gate.


Please move the slide switch "Grid view" to the left.

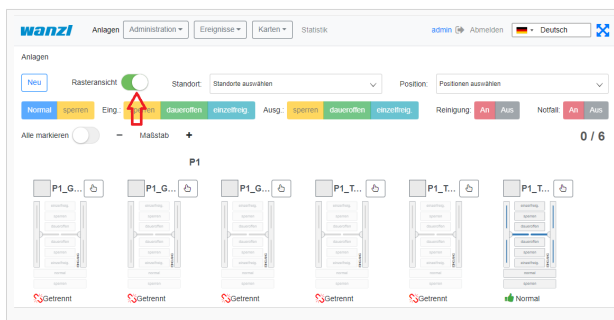


In the view click on the name of the gate which you want to delete (in the example P1\_TestGate6).

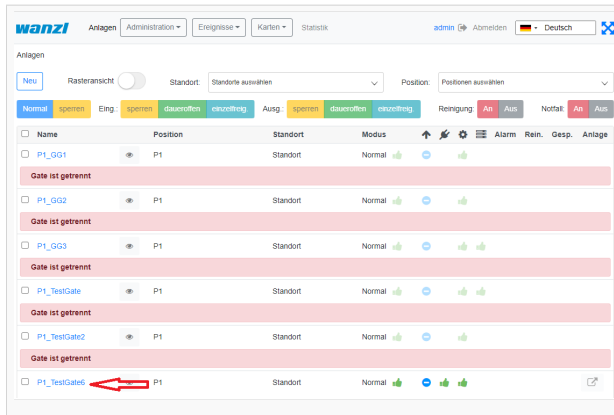


In this view, please press the "Delete" function.

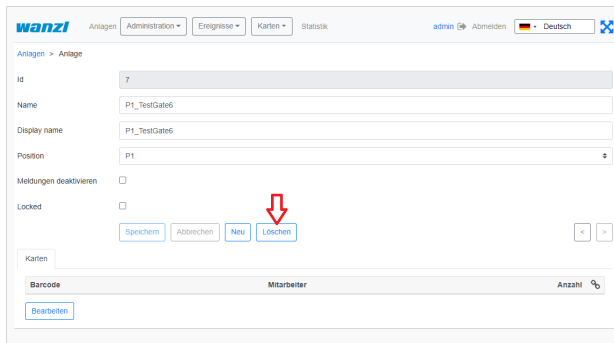


To be on the safe side, you will now be asked again whether you really want to delete the element? Please confirm this.

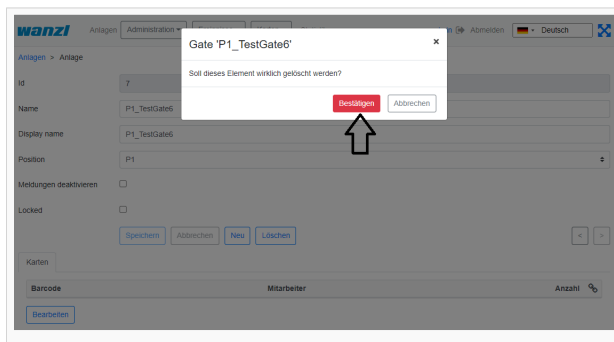

After deleting, you will automatically be shown the next gate (here in the example P1\_TestGate2). Please click on attachments here.

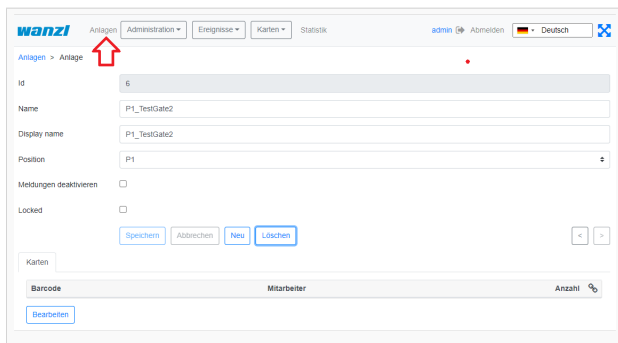

You will then see in the grid view that Gate P1\_TestGate6 is missing and has been successfully deleted.

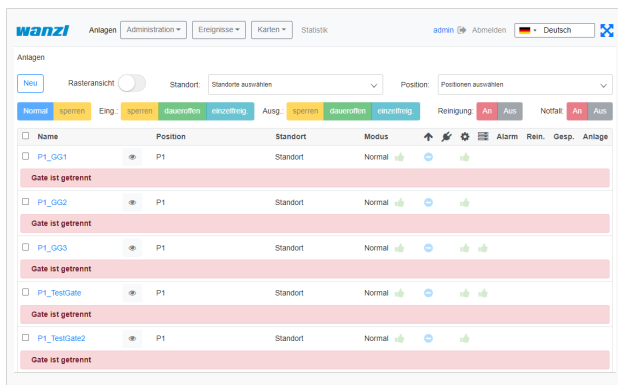

## Connectivity Board

Contact	Type	Impulse	Description
<b>A8</b>	Output	Yes (500 ms)	Person has entered
<b>A9</b>	Output	Yes (500 ms)	Alarms*
<b>E3</b>	Input	Yes (500 ms)	Open Entry
<b>E4</b>	Input	Yes (500 ms)	Open Exit
<b>E6</b>	Input	Yes (200ms)	Card is valid, open the gate
<b>E7</b>	Input	Yes (200ms)	Card is invalid, do not open the gate
<b>E8</b>	Input	No	Emergency State button**
<b>E9</b>	Input	Yes (500 ms)	Open Entry 70%
<b>E10</b>	Input	No	Fire Alarm

**\*A9 Alarms:**

- Gate is out of order, when a mandatory device is broken or a connection to the server is broken (if the server is used in the solution).
- Tailgating or other unwanted actions.
- Entry barcode scanner is broken or it is a stub.
- Gate in in the **Fire Alarm** or **Emergency** state. The alarm is produces as a repetitive pulse signal (700ms).
- Gate is open only for exit.

After the Emergency State button pressed, the gate switches to the Emergency State. Then only exit from this state is to restart the gate.

The signal can be set/received to/from a contact from any of the halves of the gate.


## Configuration Management

---

### User Interface

The Galaxy Gate is configured through the **/configuration** page. If the server is running at 192.168.1.221 and port is 8888, the url is:

<http://192.168.1.221/configuration>

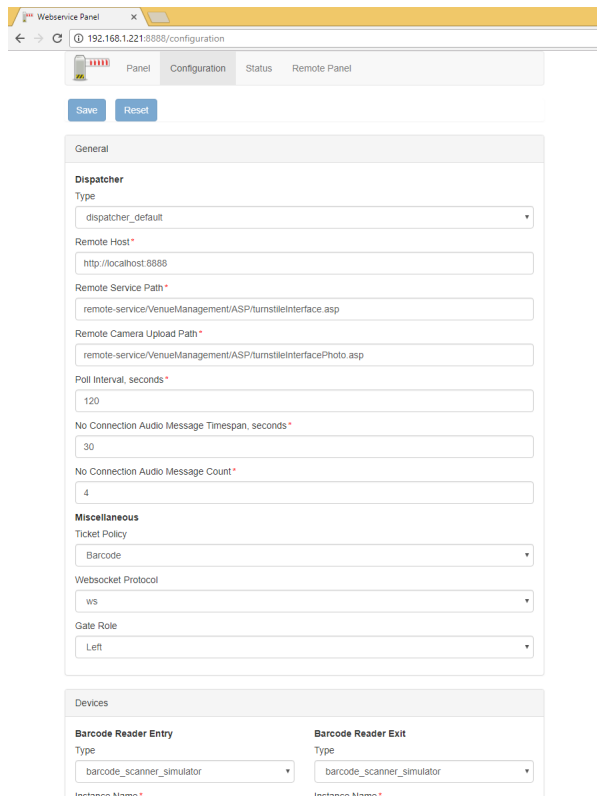

The screenshot shows a web browser window titled "Webservice Panel" with the address bar displaying "192.168.1.221:8888/configuration". The page has a navigation menu with "Panel", "Configuration", "Status", and "Remote Panel". Below the menu are "Save" and "Reset" buttons. The main content area is divided into sections: "General" (containing fields for Dispatcher Type, Remote Host, Remote Service Path, Remote Camera Upload Path, Poll Interval, No Connection Audio Message Timespan, and No Connection Audio Message Count), "Miscellaneous" (containing Ticket Policy, Websocket Protocol, and Gate Role), and "Devices" (containing Barcode Reader Entry and Barcode Reader Exit fields).

There are two buttons on the page:

Name	Description	Action
<b>Save</b>	Saves the modified configuration to the server	Post
<b>Reset</b>	Discards any changes by reloading the configuration from the server	Get

The configuration is split into sections and subsections:

- General
  - Dispatcher
  - Miscellaneous
- Devices
  - Barcode Reader Entry
  - Barcode Reader Exit
  - Gate
  - Tracking Camera
  - Audio Player
  - Camera
- Displays
  - Display Gate Entry
  - Display Gate Exit
  - Display Entry
  - Display Exit
  - Display TimeInfo

Here are some screenshots:

General

**Dispatcher**

Type

Host \*

Port \*

Protocol

Password \*

Poll Interval, seconds \*

No Connection Audio Message Timespan, seconds \*

No Connection Audio Message Count \*

**Miscellaneous**

Ticket Policy

Websocket Protocol

Gate Role

Devices

<b>Barcode Reader Entry</b>	<b>Barcode Reader Exit</b>
Type <input type="text" value="barcode_scanner_rfid"/>	Type <input type="text" value="barcode_scanner_magellan"/>
Instance Name* <input type="text" value="Barcode Scanner Entry"/>	Instance Name* <input type="text" value="Barcode Scanner Exit"/>
Read card not often than, ms* <input type="text" value="1000"/>	Read card not often than, ms* <input type="text" value="1000"/>
Port* <input type="text" value="/dev/ttyUSB2"/>	Port* <input type="text" value="/dev/ttyUSB3"/>
Beep Enabled <input type="checkbox"/> OFF	
<b>Gate</b>	
Type <input type="text" value="gate_galaxy_modbus"/>	
Port* <input type="text" value="/dev/ttyUSB0"/>	
Timeout, ms* <input type="text" value="500"/>	
Baud rate* <input type="text" value="115200"/>	
Reverse <input type="checkbox"/> OFF	
Timeout Count* <input type="text" value="2"/>	
Timespan Before Audio Message, seconds* <input type="text" value="10"/>	

**Audio Player**

Type

Host Ip Address \*

Sonos Ip Addresses, separated by a comma \*

Volume, % \*

**Camera**

Type

Uri \*

User \*

Password \*

Delay On Enter, ms \*

Delay On Exit, ms \*

Disabled

 OFF

**Tracking Camera**

Type

tracking\_camera\_xovis

Host\*

10.122.21.21

Port\*

80

Protocol

http

Password\*

pass

Entry Line\*

EnterLine

Exit Line\*

ExitLine

Inner Entry Zone\*

EnterDangerZone

Inner Exit Zone\*

ExitDangerZone

Outer Entry Zone\*

EnterZone

Outer Exit Zone\*

ExitZone

Displays

<input checked="" type="checkbox"/> <b>Display Gate Entry</b> Content Module <input type="text" value="trade_fair"/> Rotate 90 Grad <input type="checkbox"/> OFF	<input checked="" type="checkbox"/> <b>Display Gate Exit</b> Content Module <input type="text" value="default"/> Rotate 90 Grad <input type="checkbox"/> OFF
<input checked="" type="checkbox"/> <b>Display Entry</b> Show Video <input type="checkbox"/> OFF	<input checked="" type="checkbox"/> <b>Display Exit</b> Show Video <input type="checkbox"/> OFF
<input checked="" type="checkbox"/> <b>Display Time Info</b>	

Facility Management Control Unit (v2.4-88-gf5bd36c-dirty)

A subsection is often has a structure with a combo box named **Type** at the top and some fields that follow. This structure is used for configuring an entity that can have several implementations. What is important is that the implementation can differ in type and number of controls. For example, a simulator of the gate has only two properties:

**Gate**


Type

Timeout Count\*

Timespan Before Audio Message, seconds\*

## Architecture

The picture below gives a bird's eye view of the configuration management.

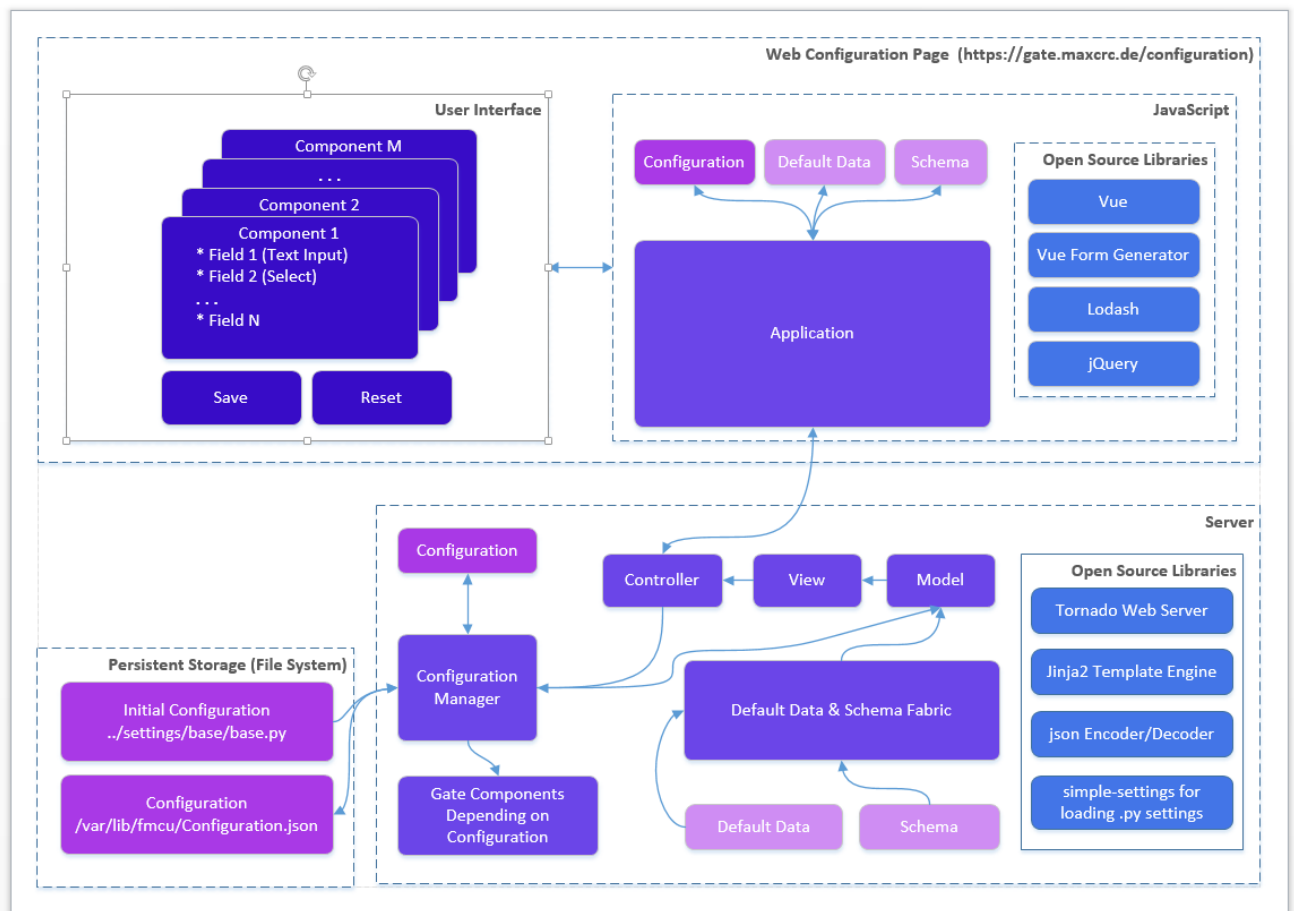

When the gate starts and the Configuration.json is present it is created from the Initial Configuration (base.py or other .py configuration file). The Schema contains a set of data for describing controls in form components:

- Which controls should contain a component
- Validations rules if any

E.g. a form component can contain a text box and an input for integers. The data range for integer should 1-100.

The Default Data contains the initial data for controls in form components.

Edit this section

## Roadmap

The features are planned for the upcoming release:

- Configurations page allows you to see the list of available configurations. You can:
  - Clone an existing configuration to a new one
  - Delete a configuration
  - Make a configuration active. Only one configuration can be used by the server and it is called *active*.

- Apply button. This should apply changes on-the-fly.
- Restart button. This should restart the docker container and apply settings, which cannot be applied on-the-fly.
- Extend the vue form generator library:
  - Make the switch control consistent with the switch controls on other pages
  - Add a control which allows you to manage an array of items (e.g. the list of connected gates). E.g. <https://codepen.io/safx/pen/AhCtk>
- Import/Export of a Configuration.json.
- Reset any configuration to the default one (by removing the json file)

## Management of Events

The following sections contains the term **Path**, which means the path is part of the URL. E.g., path **/events** for the FMCU Server running under **https://server.maxcrc.de/** means

```
https://server.maxcrc.de/events
```

## Events

Web path:

```
/events
```

The page shows a filterable and sortable list of events:

Name	Description
Date	Date and time when the event occurred
Name	Translated name of the event
Gate	Gate if appropriate where the event occurred
State	The state of the event if supported
Category	Category to which the event belongs to
Info	Additional info about the event

Edit this section

## Event Definitions Page

Path:

```
/event-definitions
```

The page shows a list of definitions of events:

Name	Description
Name	Name
Event Definition Groups	Groups to which the event belongs to if any
Supported States	Can be empty (for impulse events) or <b>On, Off</b> (for the events with states)
Category	Category to which the event belongs to

Edit this section

## Event Definition Groups

Path:

/event-definition-groups

The page shows a list of event groups:

Name	Description
Name	Name
Events	Event definitions assigned to the group
Delete	Delete button

An event definition group allows you to group one or more events so that it can be bound to a user group. See **Event Subscriptions** below

Edit this section

## Event Subscriptions

Web path:

/event-subscriptions

The page shows a list of event definition groups bound to a user groups.

Name	Description
Group	User group
Event definition group	Event definition group
Locked	When locked, events are not sent to the users of the group
Info	Any informative text
Delete	Delete button

When a event definition group is bound to a user group and not locked, new events from the event definition group are sent to the users from the user group. The user must have a valid email address.

Example. A user group **Alarm events** with two members **user1** and **user2** is bound to an event definition group **Alarm events** with two events **GateTailgating** and **GateStateFireAlarm**. When either or both of these events occur, both users **user1** and **user2** receive an email notification about that.

Edit this section

## Configuration

---

Path:

/configuration

In order the emails with events can be sent out, the **Email** section with the information like the hostname, port etc. of the outgoing server and credentials should be properly configured.